




# OIL ANALYSIS REPORT

## Sample Rating Trend

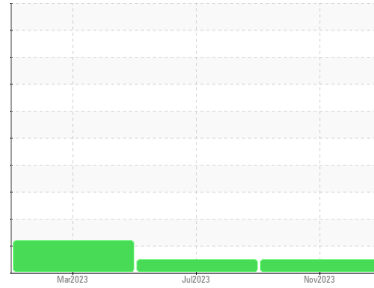

**NORMAL**



Area  
**SCHTRUCK**  
Machine Id  
**6423 [SCHTRUCK]**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0005877</b>	SBP0004720	SBP0004170
Sample Date	Client Info			<b>10 Nov 2023</b>	18 Jul 2023	15 Mar 2023
Machine Age	mls Client Info			<b>111152</b>	73838	33601
Oil Age	mls Client Info			<b>37314</b>	40237	33601
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	0.2
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>27</b>	28	42
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	4	4
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>19</b>	35	47
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>150	<b>58</b>	76	▲ 330
Tin	ppm	ASTM D5185m	>5	<b>3</b>	3	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	3	33
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	60	<b>62</b>	65	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185m	1010	<b>934</b>	961	517
Calcium	ppm	ASTM D5185m	1070	<b>1083</b>	1275	1762
Phosphorus	ppm	ASTM D5185m	1150	<b>813</b>	880	768
Zinc	ppm	ASTM D5185m	1270	<b>1179</b>	1182	930
Sulfur	ppm	ASTM D5185m	2060	<b>2331</b>	2477	1969



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	6	28
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	1
Potassium	ppm	ASTM D5185m	>20	<b>52</b>	93	130

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	9.3	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.7</b>	21.3	21.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.3</b>	18.8	21.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.8</b>	6.5	7.8







# OIL ANALYSIS REPORT

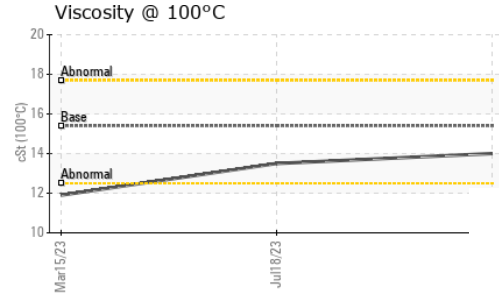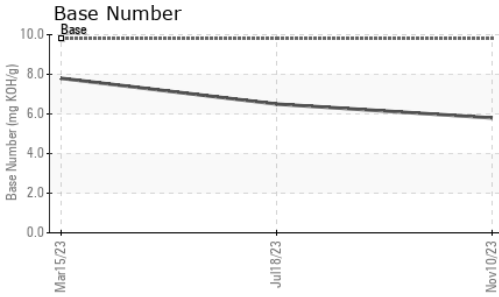

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.5 ▲ 11.9

## GRAPHS

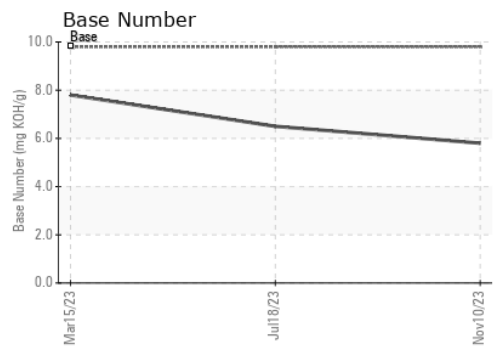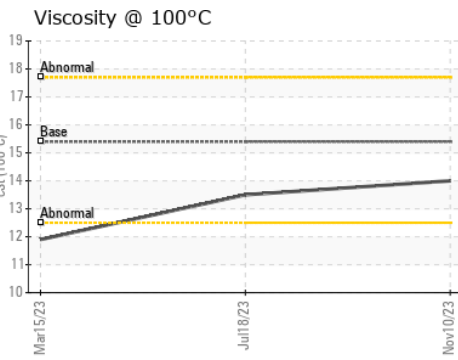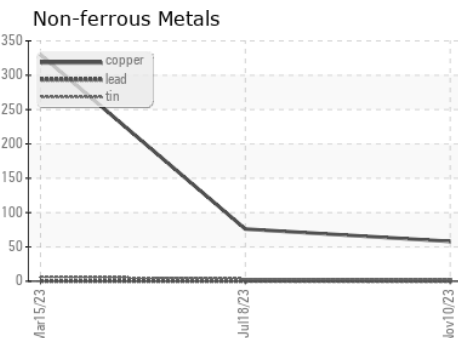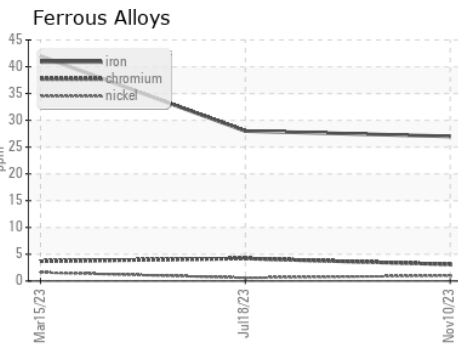

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005877 **Received** : 24 Nov 2023  
**Lab Number** : **06017224** **Diagnosed** : 28 Nov 2023  
**Unique Number** : 10756368 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - 605449**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: NICK DOTY  
 doty@liquidtrucking.com  
 T: (402)949-9398  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)