


PROBLEM SUMMARY

Sample Rating Trend

ISO

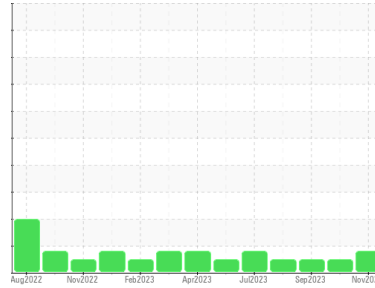


Area
Shredder
Machine Id
Mill DFR -Shredder

Component
Hydraulic Power Pack
Fluid
SHELL HYDRAULIC S1 M 68 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

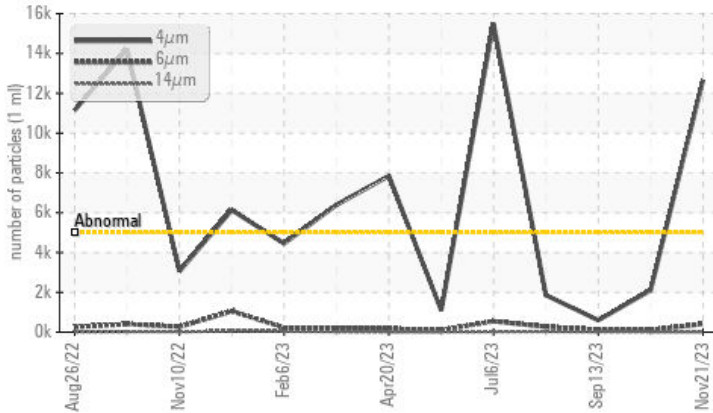

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	NORMAL
Particles >4µm	ASTM D7647 >5000	▲ 12660	2102	597
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/16/11	18/14/11	16/14/11

Customer Id: SEASEAUS
Sample No.: PE0000731
Lab Number: 06017236
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Oct 2023 Diag: Angela Borella

NORMAL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



13 Sep 2023 Diag: Don Baldrige

NORMAL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



18 Aug 2023 Diag: Jonathan Hester

NORMAL




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
Shredder
 Machine Id
Mill DFR -Shredder
 Component
Hydraulic Power Pack
 Fluid
SHELL HYDRAULIC S1 M 68 (--- GAL)

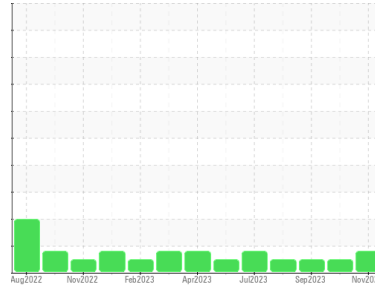

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PE0000731	PE0000614	PE0000619
Sample Date	Client Info		21 Nov 2023	13 Oct 2023	13 Sep 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG






WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		14	13	14
Iron	ppm	ASTM D5185m >20	<1	0	2
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	<1	0
Aluminum	ppm	ASTM D5185m >20	0	<1	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	5	3	6
Tin	ppm	ASTM D5185m >20	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m	6	9	13
Calcium	ppm	ASTM D5185m	44	48	47
Phosphorus	ppm	ASTM D5185m	276	236	149
Zinc	ppm	ASTM D5185m	338	319	284
Sulfur	ppm	ASTM D5185m	744	690	779

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	<1	0
Sodium	ppm	ASTM D5185m	1	0	<1
Potassium	ppm	ASTM D5185m >20	0	1	0

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 12660	2102	597
Particles >6µm	ASTM D7647	>1300	413	115	118
Particles >14µm	ASTM D7647	>160	12	12	15
Particles >21µm	ASTM D7647	>40	4	5	4
Particles >38µm	ASTM D7647	>10	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/16/11	18/14/11	16/14/11

OIL ANALYSIS REPORT

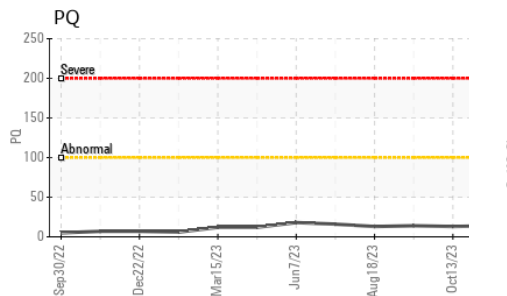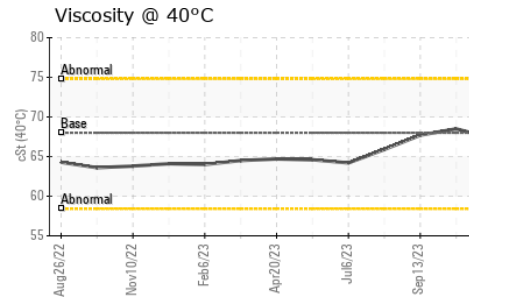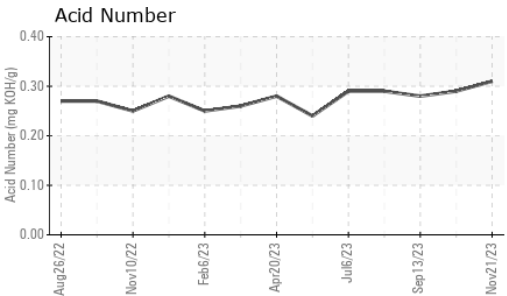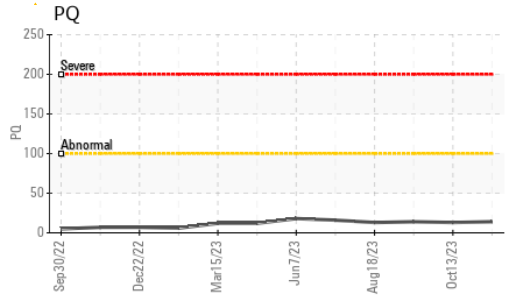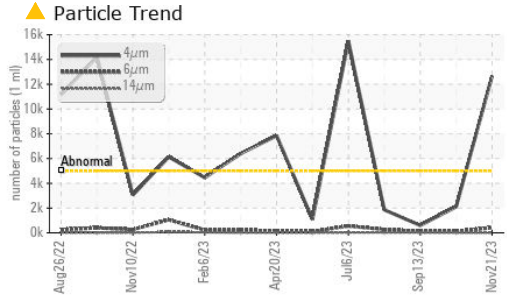


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.31	0.29	0.28





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	67.3	68.5	67.7

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

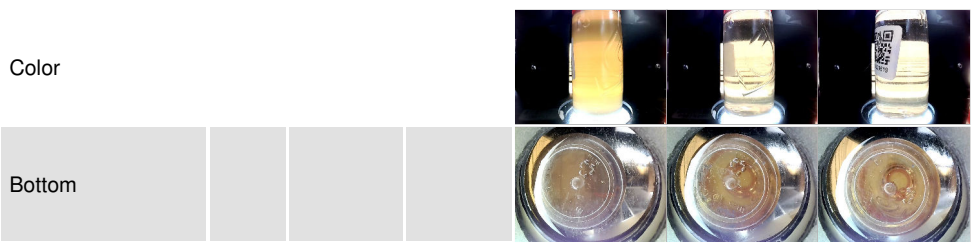

GRAPHS

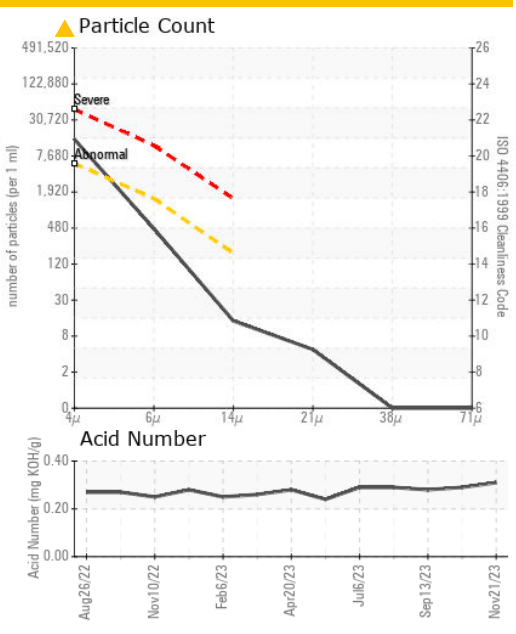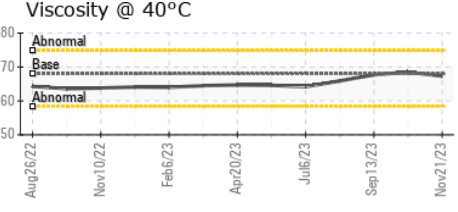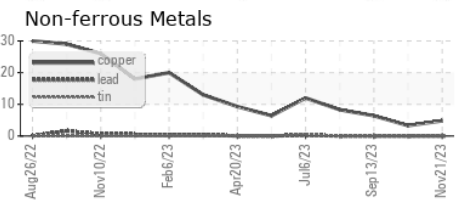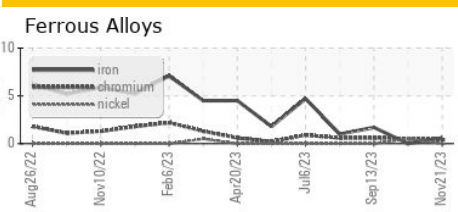

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0000731 **Received** : 24 Nov 2023
Lab Number : **06017236** **Diagnosed** : 29 Nov 2023
Unique Number : 10756380 **Diagnostician** : Jonathan Hester
Test Package : PLANT (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN)

Seattle Iron and Metals
 601 S MYRTLE ST
 SEATTLE, WA
 US 98108
 Contact: ADAM THOMAS
 athomas@seairon.com
 T: (206)682-0040
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)