

OIL ANALYSIS REPORT

Sample Rating Trend





Component Hydraulic System

SHELL AW HYDRAULIC S2 46 (1800 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	AugŽorz Svpčizz NevŽozz Dvežozz Apržižz Junžoz Ovežozz NevŽozz								
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		PE0000728	PE0000613	PE0001406			
Sample Date		Client Info		21 Nov 2023	13 Oct 2023	07 Jun 2023			
Machine Age	hrs	Client Info		0	0	0			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				NORMAL	NORMAL	NORMAL			
CONTAMINATIC	DN	method	limit/base	current	history1	history2			
Water		WC Method	>0.05	NEG	NEG	NEG			
WEAR METALS		method	limit/base	current	history1	history2			
PQ		ASTM D8184		12	16	19			
Iron	ppm	ASTM D5185m	>20	6	5	7			
Chromium	ppm	ASTM D5185m	>20	<1	1	1			
Nickel	ppm	ASTM D5185m	>20	0	<1	0			
Titanium	ppm	ASTM D5185m		0	0	0			
Silver	ppm	ASTM D5185m		0	0	0			
Aluminum	ppm	ASTM D5185m	>20	0	<1	0			
Lead	ppm	ASTM D5185m	>20	0	0	0			
Copper	ppm	ASTM D5185m	>20	5	5	6			
Tin	ppm	ASTM D5185m	>20	0	0	0			
Vanadium	ppm	ASTM D5185m		0	0	0			
Cadmium	ppm	ASTM D5185m		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m		0	0	0			
Barium	ppm	ASTM D5185m		0	0	0			
Molybdenum	ppm	ASTM D5185m		0	0	<1			
Manganese	ppm	ASTM D5185m		0	0	<1			
Magnesium	ppm	ASTM D5185m		3	0	5			
Calcium	ppm	ASTM D5185m		45	48	50			
Phosphorus	ppm	ASTM D5185m		293	248	321			
Zinc	ppm	ASTM D5185m		349	342	360			
Sulfur	ppm	ASTM D5185m		783	765	920			
CONTAMINANT	S	method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>15	<1	1	<1			
Sodium	ppm	ASTM D5185m		1	<1	<1			
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1			
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>5000	704	466	482			
Particles >6µm		ASTM D7647	>1300	193	97	79			
Particles >14µm		ASTM D7647	>160	20	7	6			
Particles >21µm		ASTM D7647	>40	6	2	1			
Particles >38µm		ASTM D7647	>10	0	0	0			
Particles >71µm		ASTM D7647	>3	0	0	0			

ISO 4406 (c) >19/17/14

17/15/11


Oil Cleanliness


16/13/10


16/14/10




OIL ANALYSIS REPORT

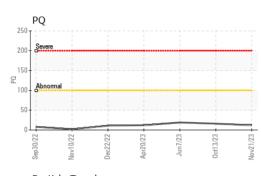


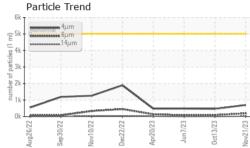

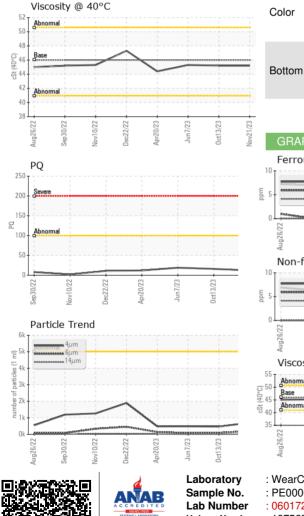

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.23	0.26	0.23
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.2	45.2	45.3
SAMPLE IMAGES		method	limit/base	current	history1	history2



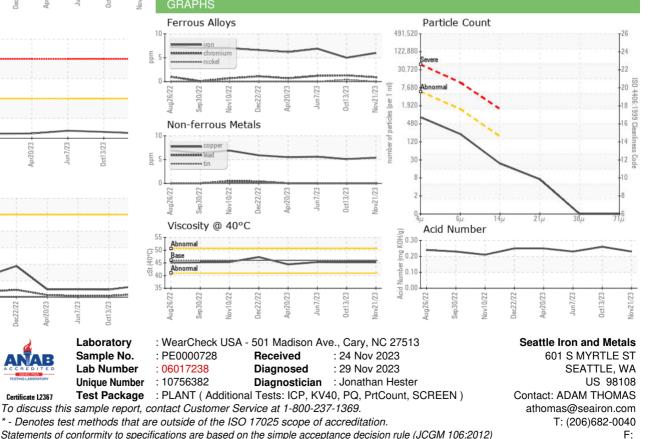

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: DUANE DENOTTA

Page 2 of 2