




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

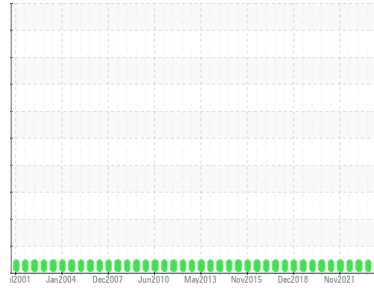

Machine Id  
**2945**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 24 (55 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0867571</b>   | WC0818792   | WC0742538   |
| Sample Date        | Client Info |             |            | <b>20 Nov 2023</b> | 15 May 2023 | 14 Nov 2022 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>1</b>     | 3        | 3        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>0</b>     | 1        | <1       |
| Lead        | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >20        | <b>46</b>    | 52       | 48       |
| Tin         | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |

| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>    | 0        | <1       |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Magnesium  | ppm | ASTM D5185m |            | <b>0</b>    | 0        | 0        |
| Calcium    | ppm | ASTM D5185m |            | <b>99</b>   | 105      | 101      |
| Phosphorus | ppm | ASTM D5185m |            | <b>382</b>  | 407      | 367      |
| Zinc       | ppm | ASTM D5185m |            | <b>595</b>  | 549      | 527      |
| Sulfur     | ppm | ASTM D5185m |            | <b>5210</b> | 5667     | 5686     |





| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | 1        | 2        |
| Sodium       | ppm | ASTM D5185m |            | <b>3</b>     | 2        | 2        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>2515</b>     | 2894     | 5489     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>161</b>      | 221      | 360      |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>11</b>       | 23       | 11       |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>5</b>        | 6        | 2        |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>0</b>        | 0        | 1        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>        | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/14  | <b>19/15/11</b> | 19/15/12 | 20/16/11 |

| FLUID DEGRADATION |          | method     | limit/base | current      | history1 | history2 |
|-------------------|----------|------------|------------|--------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>1.419</b> | 1.19     | 1.21     |




# OIL ANALYSIS REPORT

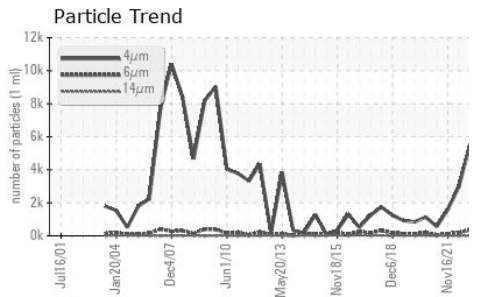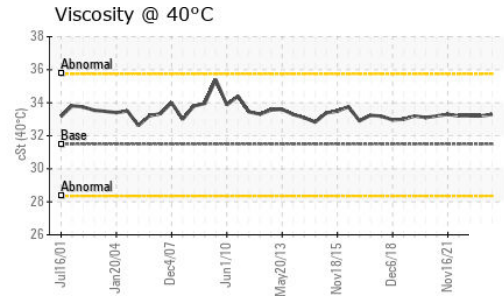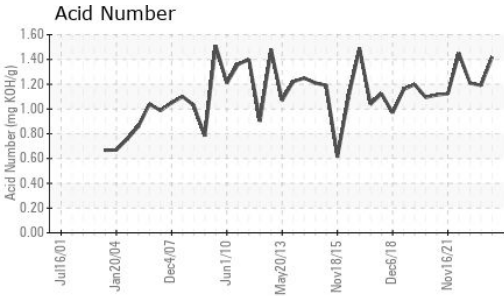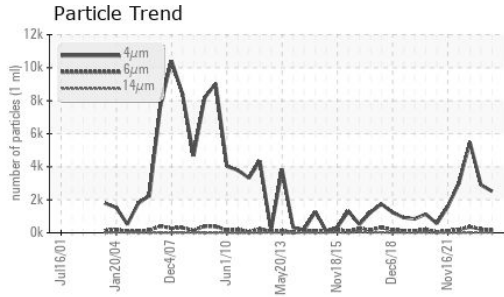






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 31.5    | 33.3     | 33.2     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

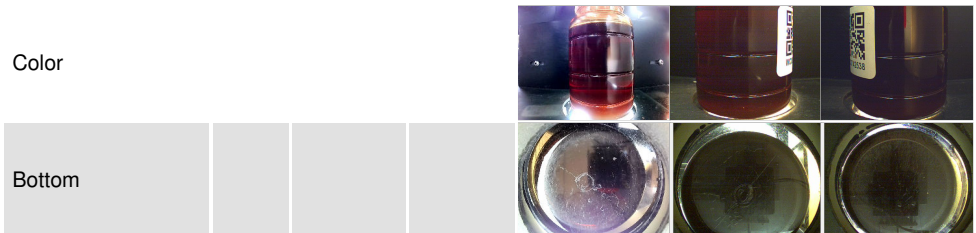

## GRAPHS

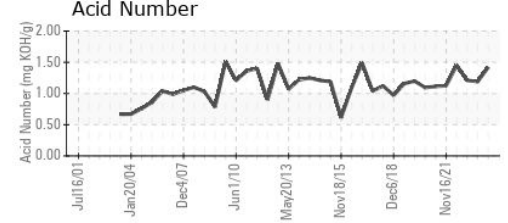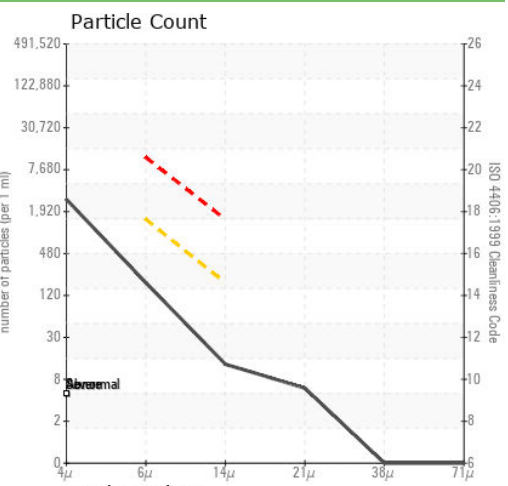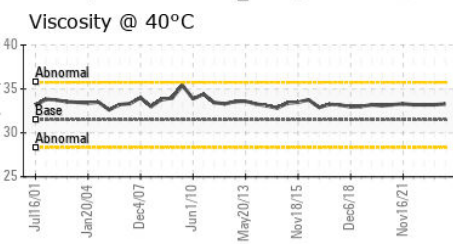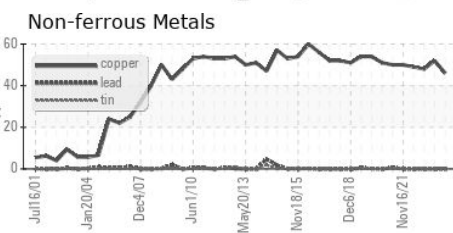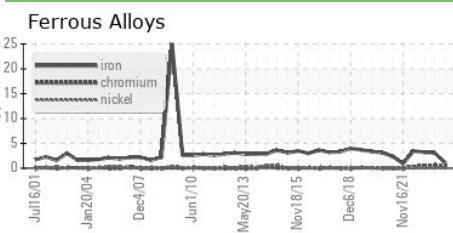

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867571 **Received** : 24 Nov 2023  
**Lab Number** : 06017302 **Diagnosed** : 28 Nov 2023  
**Unique Number** : 10756446 **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**KOYO BEARINGS USA LLC S**  
 400 FRIENDSHIP RD  
 SYLVANIA, GA  
 US 30467  
 Contact: RUSSELL ZIPPERER  
 russell.zipperer@jtekt.com  
 T: (912)564-7151  
 F: (912)564-7244

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)