

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 6808372 (S/N 1090) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		De	c2021	Nov2022 Nov202	13		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA011645	KCP47893D	KCP43199	
Sample Date		Client Info		16 Nov 2023	14 Nov 2022	02 Dec 2021	
Machine Age	hrs	Client Info		13425	10331	7396	
Oil Age	hrs	Client Info		0	3200	3000	
Oil Changed		Client Info		N/A	Changed	Changed	
Sample Status				NORMAL	NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	0	1	
Chromium	ppm	ASTM D5185m	>10	0	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	0	
Silver	ppm	ASTM D5185m	>2	0	2	0	
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1	
Lead	ppm	ASTM D5185m	>10	0	0	0	
Copper	ppm	ASTM D5185m		2	10	8	
Tin	ppm	ASTM D5185m	>10	0	<1	0	
Antimony	ppm	ASTM D5185m				0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
	ррш						
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0	0	
Barium	ppm	ASTM D5185m	90	3	1	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	<1	
Magnesium	ppm	ASTM D5185m	100	60	51	43	
Calcium	ppm	ASTM D5185m	0	0	2	0	
Phosphorus	ppm	ASTM D5185m	0	0	5	5	
Zinc	ppm	ASTM D5185m	0	4	11	7	
Sulfur	ppm	ASTM D5185m	23500	19196	25231	17978	
CONTAMINANTS	;	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	0	3	2	
Sodium	ppm	ASTM D5185m		16	11	14	
Potassium	ppm	ASTM D5185m	>20	<1	3	0	
Water	%	ASTM D6304	>0.05	0.026	0.011	0.017	
ppm Water	ppm	ASTM D6304	>500	269	118.0	170.6	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		507	988	37495	
Particles >6µm		ASTM D7647	>1300	172	264	1 4310	
Particles >14µm		ASTM D7647	>80	16	27	1 006	
Particles >21µm		ASTM D7647	>20	3	10	1 87	
Particles >38µm		ASTM D7647	>4	0	1	2	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/15/11	17/15/12	2 1/17	
FLUID DEGRADA		method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.32	0.31	0.402	
:45:21) Rev: 1				Contact/Location: ROB ? - LONGIL			


Report Id: LONGIL [WUSCAR] 06017359 (Generated: 11/29/2023 19:45:21) Rev: 1


Page 1 of 2



OIL ANALYSIS REPORT






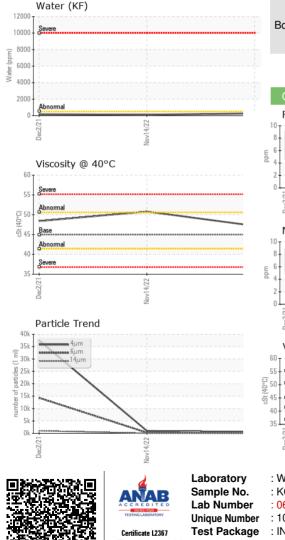

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.2	50.8	48.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
_			(

Bottom

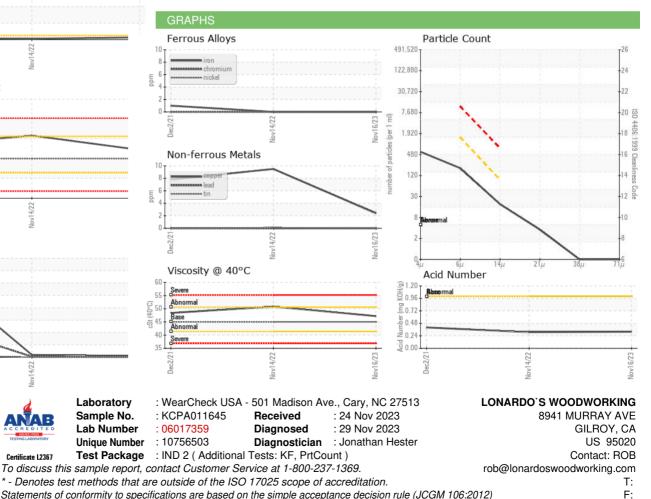

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)