

### **OIL ANALYSIS REPORT**

NORMAL

# KAESER 7209622

## Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Sep2020	Mar2021 Sep2021	Aug2022 Apr2023	Nov2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010048	KCPA000224	KCP50528
Sample Date		Client Info		21 Nov 2023	17 Apr 2023	09 Aug 2022
Machine Age	hrs	Client Info		10513	8885	7083
Oil Age	hrs	Client Info		0	0	1200
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	SEVERE	SEVERE
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	1
Aluminum	ppm	ASTM D5185m		0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper		ASTM D5185m		23	6	19
Tin	ppm	ASTM D5185m	>50 >10	-	0	<1
	ppm		>10	0		
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	0	28	11
Calcium	ppm	ASTM D5185m	0	0	1	0
Phosphorus	ppm	ASTM D5185m	0	0	4	0
Zinc	ppm	ASTM D5185m	0	41	16	52
Sulfur	ppm	ASTM D5185m	23500	18875	19290	19394
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	1
Sodium	ppm	ASTM D5185m		2	1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.004	▲ 0.184	▲ 0.407
ppm Water	ppm	ASTM D6304	>500	47	▲ 1840	▲ 4070
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1975		
Particles >6µm		ASTM D7647	>1300	741		
Particles >14µm		ASTM D7647	>80	55		
Particles >21µm		ASTM D7647	>20	13		
Particles >38µm		ASTM D7647		0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/17/13		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.29	0.34	0.28
:14:47) Rev: 1	mgnonig	. 10 1 11 200-10			Service Manage	


Sample Rating Trend


Report Id: PENWINNC [WUSCAR] 06017373 (Generated: 11/29/2023 21:14:47) Rev: 1


Contact/Location: Service Manager - PENWINNC




## **OIL ANALYSIS REPORT**

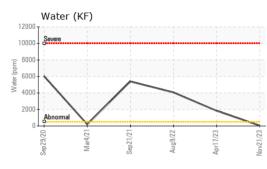

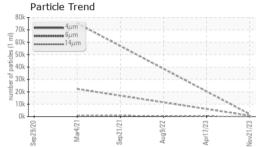

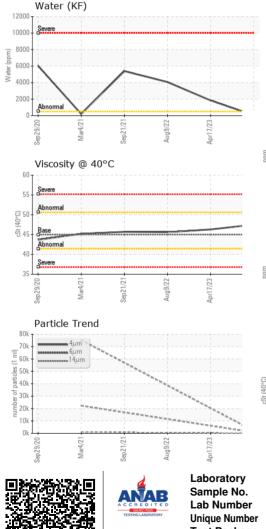

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	A MODER	NONE
Debris	scalar	*Visual	NONE	NONE	🔺 MODER	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	🔺 HAZY	🔺 HAZY
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%	0.2%
Free Water	scalar	*Visual		NEG	10.0	10.0
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.5	46.3	45.6
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color				•		
Bottom					(\$9)	

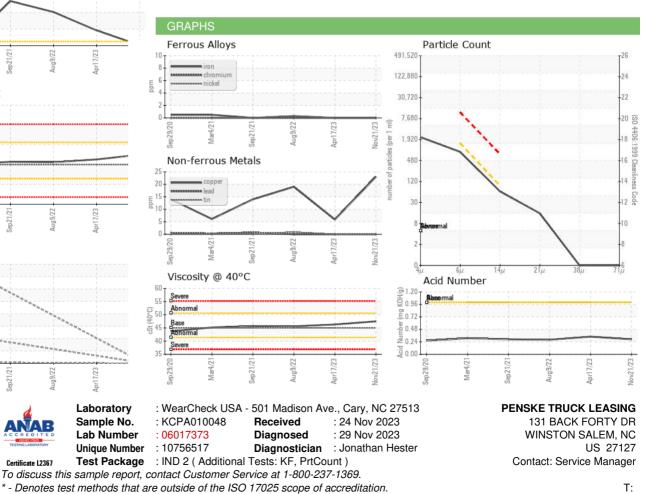

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - PENWINNC

F: