


PROBLEM SUMMARY

Machine Id MYCOM TYSSPRCH-B2 (S/N 2053536) Component

Refrigeration Compressor Fluid USPI ALT-68 SC (110 GAL)

COMPONENT CONDITION SUMMARY

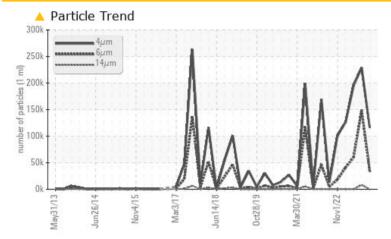

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL	
Particles >6µm	ASTM D7647	>2500	<u> </u>	🔺 149362	60189	
Particles >14µm	ASTM D7647	>320	A 348	▲ 7825	A 361	
Oil Cleanliness	ISO 4406 (c)	>/18/15	<u> </u>	▲ 25/24/20	▲ 25/23/16	


Customer Id: TYSSPRCH Sample No.: USP0003780 Lab Number: 06017431 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

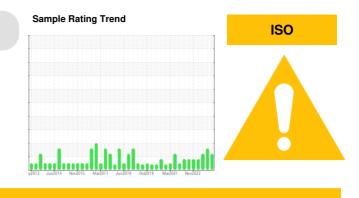

RECOMMENDED AC	TIONS			
Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS



15 Aug 2023 Diag: Doug Bogart

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

view report

03 May 2023 Diag: Doug Bogart



We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

ISO

02 Feb 2023 Diag: Doug Bogart

Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

Machine Id MYCOM TYSSPRCH-B2 (S/N 2053536) Component

Refrigeration Compressor Fluid USPI ALT-68 SC (110 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample hating frend	ISO
	A
2013 Jun2014 Nev2015 Mar2017 Jun2018 Oct2019 Mar2021 Nev2022	

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003780	USP0000583	USP243306
Sample Date		Client Info		21 Nov 2023	15 Aug 2023	03 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	5	1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	<1
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	3	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m	50	0	0	21
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	1	0
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.007
ppm Water	ppm	ASTM D6304	>100	37	23.7	79.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		116161	228997	195020
Particles >6µm		ASTM D7647	>2500	<u> </u>	<u> </u>	▲ 60189
Particles >14µm		ASTM D7647	>320	A 348	▲ 7825	A 361
Particles >21µm		ASTM D7647	>80	29	5 13	19
Particles >38µm		ASTM D7647	>20	0	2	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	4/22/16	▲ 25/24/20	▲ 25/23/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015

Contact/Location: SERVICE - TYSSPRCH



250

20

E 150

Mater 001


70

cSt (40°C)

60

5


OIL ANALYSIS REPORT

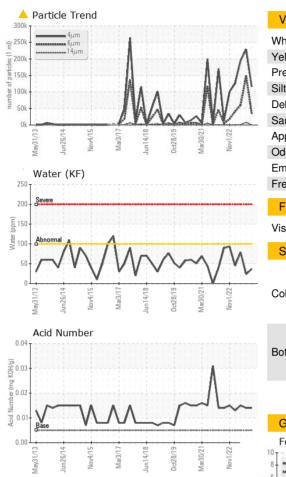

VISUAL		in a the a d	line it /le e e e		la la tanan d	history O
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
		methou	IIIIII/Dase	Current	Thistory	TIStory2
Visc @ 40°C	cSt	ASTM D445	65.6	65.6	67.8	66.8
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				REAL PROPERTY AND A DESCRIPTION OF THE P	•	

Bottom

GRAPHS

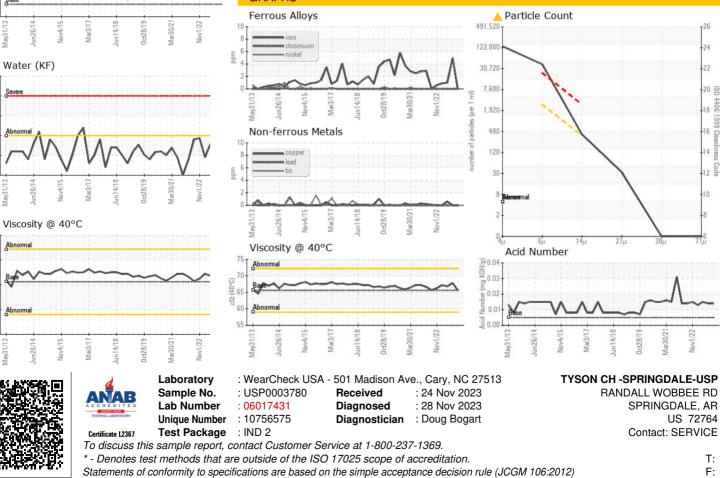

Contact/Location: SERVICE - TYSSPRCH