

### **PROBLEM SUMMARY**

### Sample Rating Trend




# FRICK TYSSPRCH-B5 (S/N 2010DHP3/ODX2552)

**Refrigeration Compressor** 

USPI ALT-68 SC (110 GAL)



### **COMPONENT CONDITION SUMMARY**

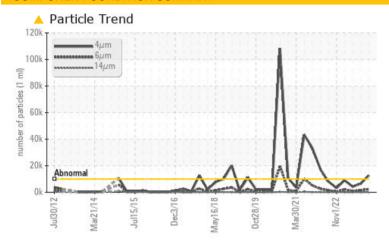

### RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TE	ST RESULTS			
Sample Status		ATTENTION	NORMAL	NORMAL
Particles >4µm	ASTM D7647 >	>10000 <b>A 12729</b>	6369	4212
Oil Cleanliness	ISO 4406 (c) >	>20/18/15 <b>\( \) 21/18/13</b>	20/18/13	19/17/11

Customer Id: TYSSPRCH Sample No.: USP0003778 Lab Number: 06017433 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 15 Aug 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 03 May 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 02 Feb 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





### **OIL ANALYSIS REPORT**

### **Sample Rating Trend**



Machine Id

## FRICK TYSSPRCH-B5 (S/N 2010DHP3/ODX2552)

Component

**Refrigeration Compressor** 

USPI ALT-68 SC (110 GAL)

### **DIAGNOSIS**

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

2012 Mar/014 Jud015 Dec/016 Mar/018 Dec/019 Mar/027								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		USP0003778	USP0000589	USP243309		
Sample Date		Client Info		21 Nov 2023	15 Aug 2023	03 May 2023		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				ATTENTION	NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>8	0	<1	3		
Chromium	ppm	ASTM D5185m	>2	0	0	0		
Nickel	ppm	ASTM D5185m		0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m	>3	0	0	0		
Lead	ppm	ASTM D5185m	>2	0	0	0		
Copper	ppm	ASTM D5185m	>8	0	0	0		
Tin	ppm	ASTM D5185m	>4	0	0	0		
Vanadium	ppm	ASTM D5185m		0	<1	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	2		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m		0	0	0		
Calcium	ppm	ASTM D5185m		0	0	0		
Phosphorus	ppm	ASTM D5185m		0	0	0		
Zinc	ppm	ASTM D5185m		0	0	0		
Sulfur	ppm	ASTM D5185m	50	0	5	0		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	0	0	0		
Sodium	ppm	ASTM D5185m		<1	0	0		
Potassium	ppm	ASTM D5185m	>20	0	1	<1		
Water	%	ASTM D6304	>0.01	0.005	0.006	0.008		
ppm Water	ppm	ASTM D6304	>100	58	66.4	86.7		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	<u> </u>	6369	4212		
Particles >6µm		ASTM D7647	>2500	2278	1421	847		
Particles >14μm		ASTM D7647	>320	52	79	16		
Particles >21µm		ASTM D7647	>80	10	19	3		
Particles >38μm		ASTM D7647	>20	0	0	1		
Particles >71μm		ASTM D7647	>4	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>21/18/13</b>	20/18/13	19/17/11		

FLUID DEGRADATION

Acid Number (AN)

method

mg KOH/g ASTM D974 0.005

limit/base

current

0.014

history1


0.014

history2

0.014



### **OIL ANALYSIS REPORT**

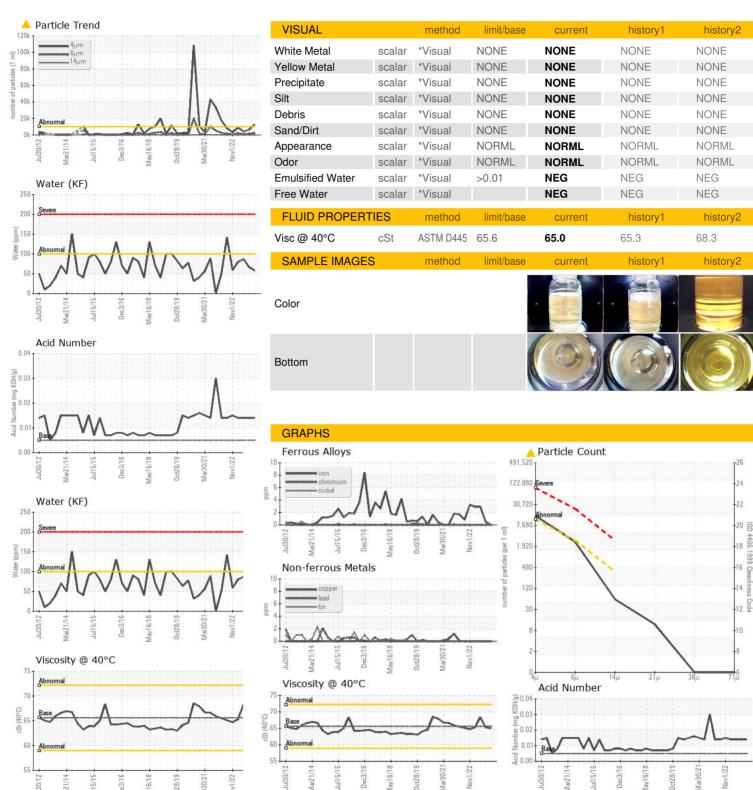





Laboratory Sample No. Lab Number

**Unique Number** Test Package

: USP0003778 : 06017433

: 10756577 : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 24 Nov 2023 Received

: 28 Nov 2023 Diagnosed Diagnostician : Doug Bogart

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: SERVICE

**TYSON CH -SPRINGDALE-USP** 

RANDALL WOBBEE RD

SPRINGDALE, AR

US 72764

T: F: