




# OIL ANALYSIS REPORT

Sample Rating Trend

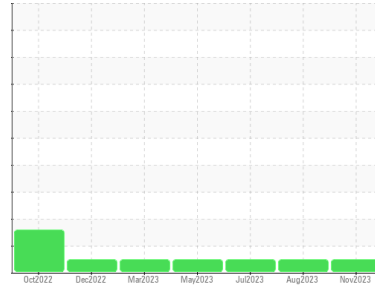

**NORMAL**



Machine Id

**2308**

Component

**Diesel Engine**

Fluid

**CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0859282</b>	PCA0085454	PCA0085459
Sample Date	Client Info		<b>27 Nov 2023</b>	29 Aug 2023	12 Jul 2023
Machine Age	mls	Client Info	<b>136877</b>	118502	99570
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>19</b>	17	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>12</b>	24	20
Lead	ppm	ASTM D5185m	>40	<b>2</b>	1	3
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>147</b>	161	205
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>126</b>	119	132
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>602</b>	675	723
Calcium	ppm	ASTM D5185m		<b>1454</b>	1586	1711
Phosphorus	ppm	ASTM D5185m	760	<b>615</b>	711	792
Zinc	ppm	ASTM D5185m	800	<b>771</b>	883	948
Sulfur	ppm	ASTM D5185m	3000	<b>2556</b>	2942	3247

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	9
Sodium	ppm	ASTM D5185m		<b>0</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>28</b>	53	44

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	8.9	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.0</b>	23.5	25.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.9</b>	18.4	20.3
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>6.2</b>	6.9	7.4







# OIL ANALYSIS REPORT

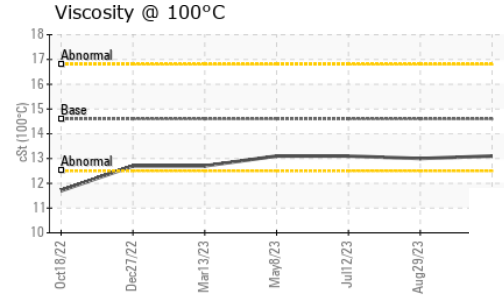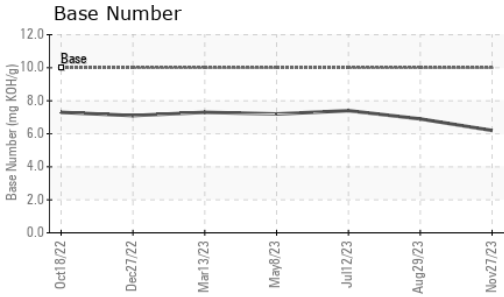

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	<b>13.1</b>	13.0	13.1

### GRAPHS

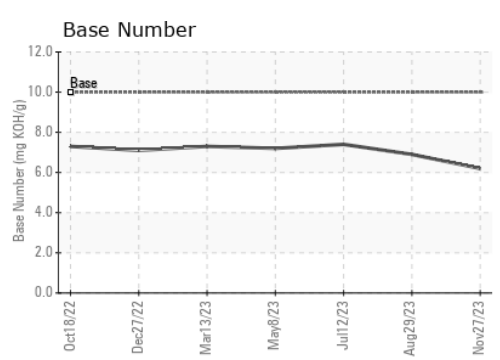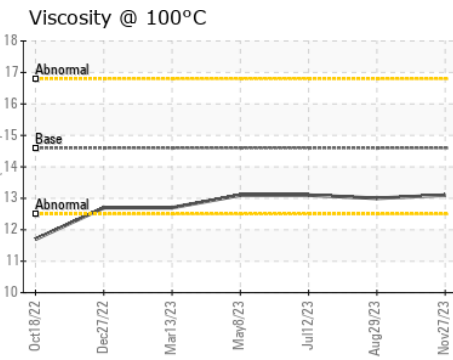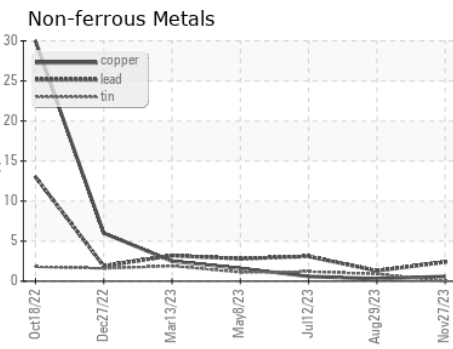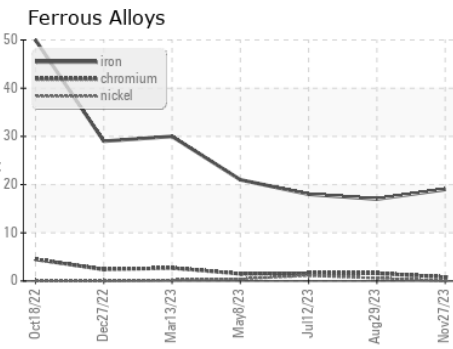

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859282 **Received** : 05 Dec 2023  
**Lab Number** : **06025535** **Diagnosed** : 06 Dec 2023  
**Unique Number** : 10770035 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Ergon Trucking Inc. - MAG601**  
 11337 State Route 800  
 Magnolia, OH  
 US 44643  
 Contact: Eddy Smith  
 eddy.smith@ergon.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)