




OIL ANALYSIS REPORT

Sample Rating Trend

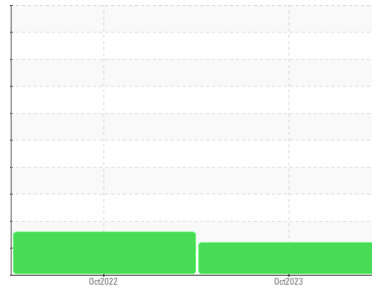

ISO



Area
VENEZIA
Machine Id
VENEZIA 2241
Component
Rear Differential
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0876023	WC0751696	---
Sample Date	Client Info		27 Oct 2023	04 Oct 2022	---
Machine Age	mls	Client Info	37235	117	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	122	13	---
Chromium	ppm	ASTM D5185m	>10	2	0	---
Nickel	ppm	ASTM D5185m	>10	4	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	<1	0	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		128	122	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		10	1	---
Magnesium	ppm	ASTM D5185m		144	160	---
Calcium	ppm	ASTM D5185m		5	2	---
Phosphorus	ppm	ASTM D5185m		1695	1648	---
Zinc	ppm	ASTM D5185m		0	2	---
Sulfur	ppm	ASTM D5185m		25311	28620	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	31	6	---
Sodium	ppm	ASTM D5185m		4	2	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water	%	ASTM D6304	>.2	0.019	0.055	---
ppm Water	ppm	ASTM D6304	>2000	194	554.5	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 139593	▲ 144442	---
Particles >6µm	ASTM D7647	>5000	▲ 32528	▲ 38885	---
Particles >14µm	ASTM D7647	>640	94	▲ 763	---
Particles >21µm	ASTM D7647	>160	14	113	---
Particles >38µm	ASTM D7647	>40	1	7	---
Particles >71µm	ASTM D7647	>10	0	1	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/14	▲ 24/22/17	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.81	0.81	---




OIL ANALYSIS REPORT

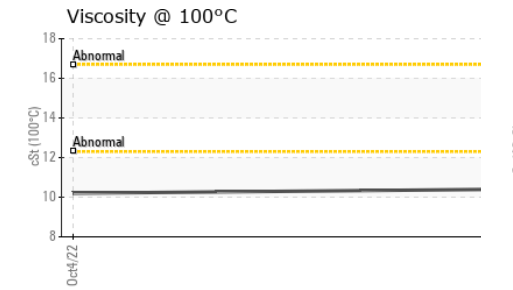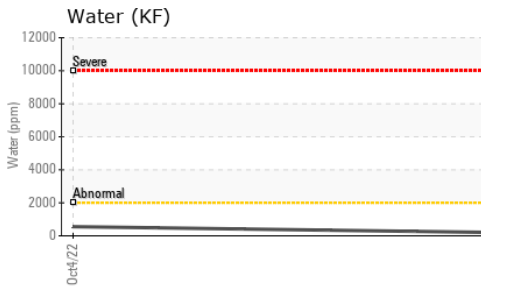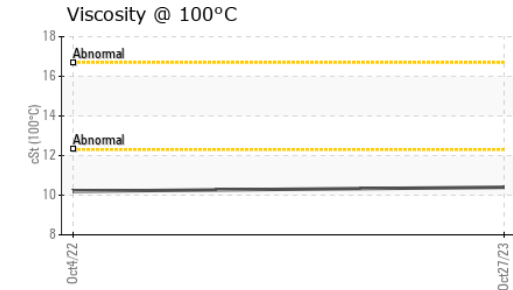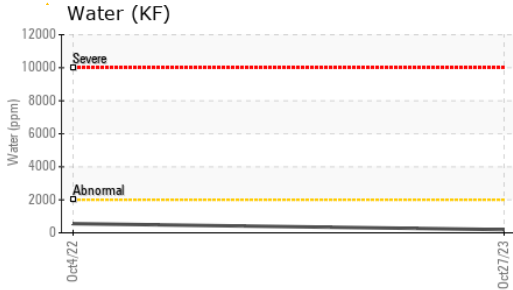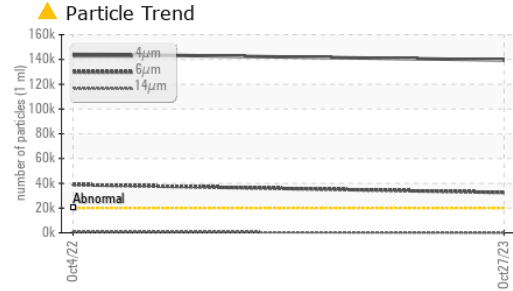






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	54.5	---
Visc @ 100°C	cSt	ASTM D445	10.4	10.2	---
Viscosity Index (VI)	Scale	ASTM D2270	173	178	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

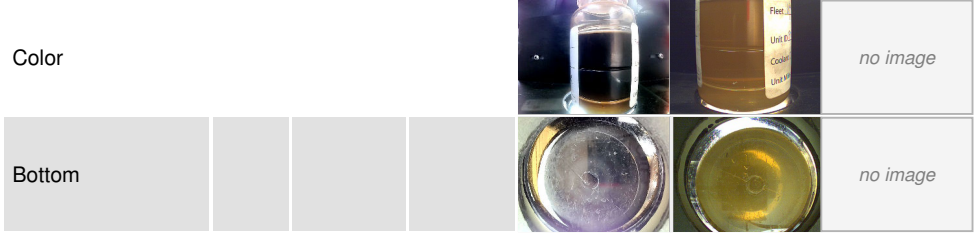

GRAPHS

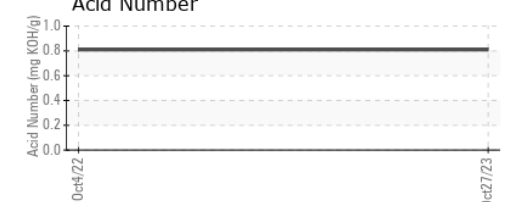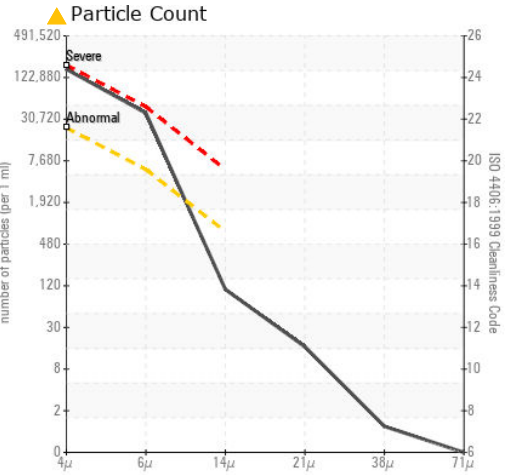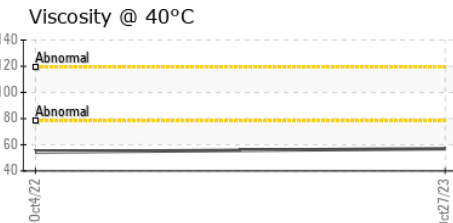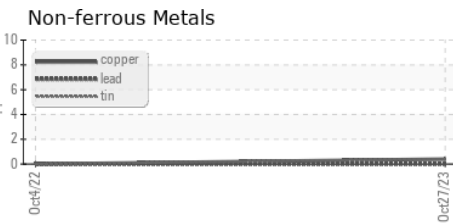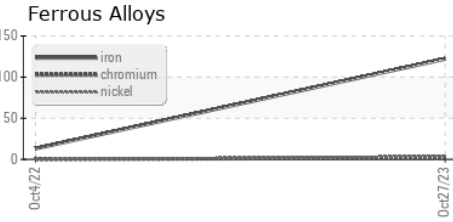

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876023 **Received** : 05 Dec 2023
Lab Number : 06025718 **Diagnosed** : 07 Dec 2023
Unique Number : 10770218 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)