




OIL ANALYSIS REPORT

Sample Rating Trend

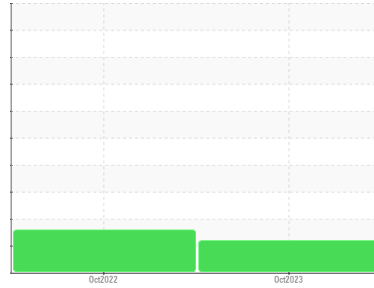

ISO



Area
VENEZIA
Machine Id
VENEZIA 2241
Component
Front Differential
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0876022	WC0751697	---
Sample Date	Client Info		27 Oct 2023	04 Oct 2022	---
Machine Age	mls	Client Info	37235	117	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	142	7	---
Chromium	ppm	ASTM D5185m	>10	2	0	---
Nickel	ppm	ASTM D5185m	>10	2	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	<1	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>100	17	<1	---
Tin	ppm	ASTM D5185m	>10	2	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		109	111	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		9	1	---
Magnesium	ppm	ASTM D5185m		153	167	---
Calcium	ppm	ASTM D5185m		4	2	---
Phosphorus	ppm	ASTM D5185m		1700	1641	---
Zinc	ppm	ASTM D5185m		0	<1	---
Sulfur	ppm	ASTM D5185m		25403	28135	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	31	5	---
Sodium	ppm	ASTM D5185m		4	1	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water	%	ASTM D6304	>.2	0.020	0.038	---
ppm Water	ppm	ASTM D6304	>2000	205	385.3	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 155568	▲ 125575	---
Particles >6µm	ASTM D7647	>5000	▲ 47266	▲ 29962	---
Particles >14µm	ASTM D7647	>640	403	▲ 797	---
Particles >21µm	ASTM D7647	>160	65	133	---
Particles >38µm	ASTM D7647	>40	2	11	---
Particles >71µm	ASTM D7647	>10	0	1	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/23/16	▲ 24/22/17	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.73	0.73	---




OIL ANALYSIS REPORT

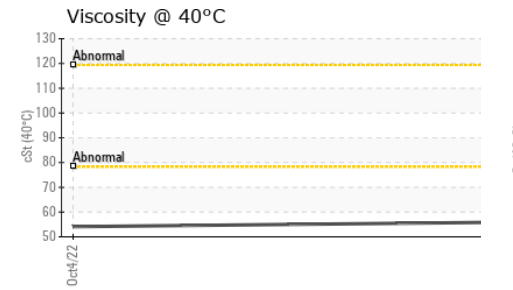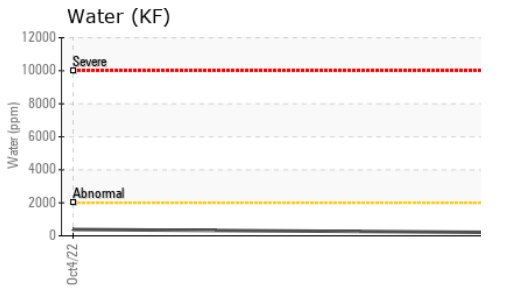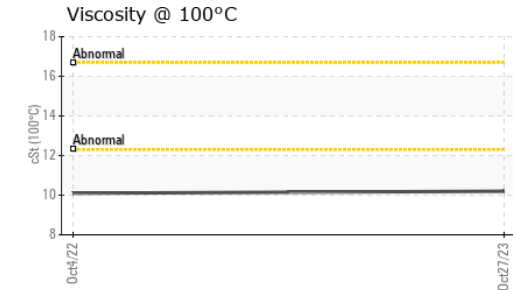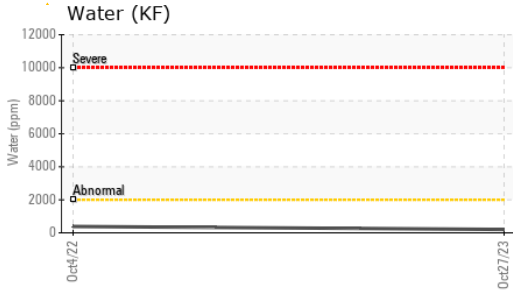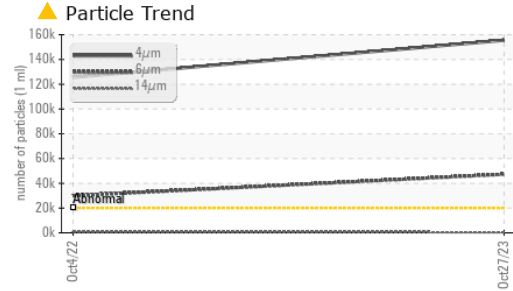






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55.9	54.1	---
Visc @ 100°C	cSt	ASTM D445	10.2	10.1	---
Viscosity Index (VI)	Scale	ASTM D2270	172	177	---

SAMPLE IMAGES

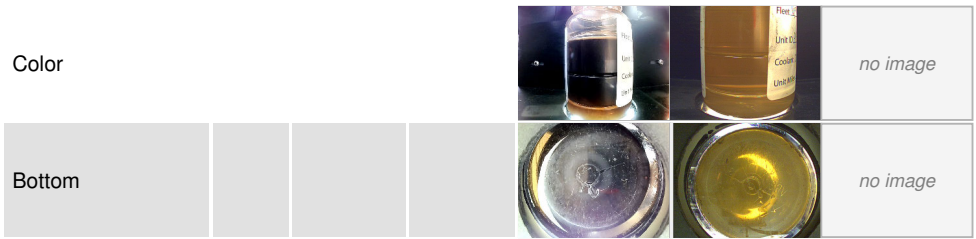

GRAPHS

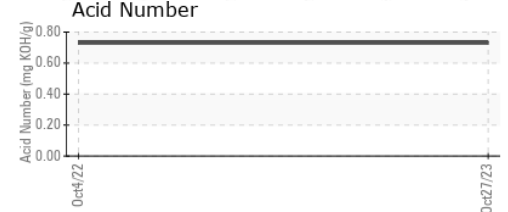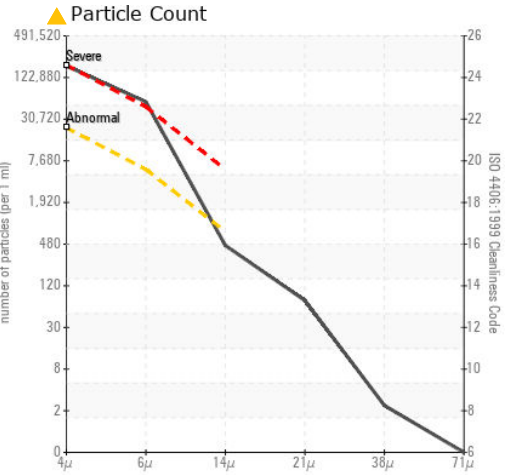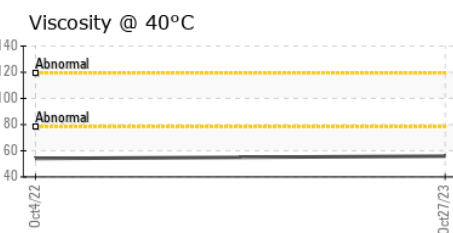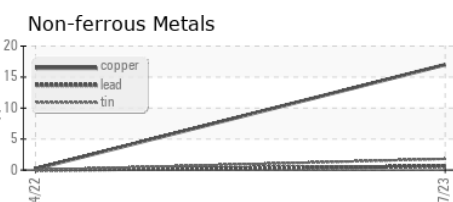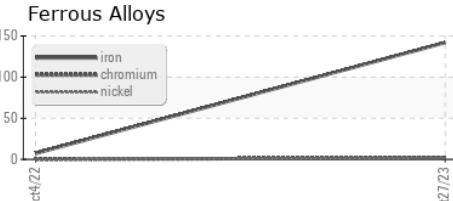

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876022 **Received** : 05 Dec 2023
Lab Number : **06025719** **Diagnosed** : 07 Dec 2023
Unique Number : 10770219 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)