



PROBLEM SUMMARY

Sample Rating Trend



WEAR




Area
[73362414]
 Machine Id
7018737 (S/N 1159)


Component
Compressor
 Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Aluminum (ppm)

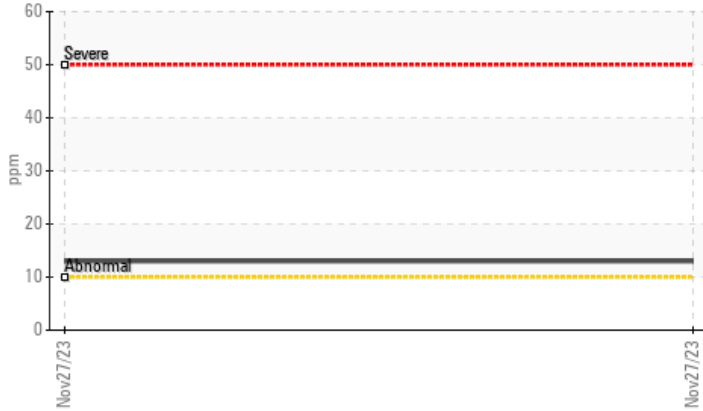

▲ Particle Trend

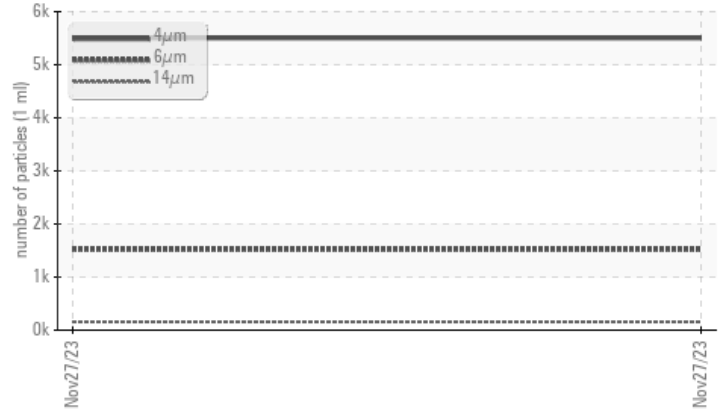

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Aluminum	ppm	ASTM D5185m	>10	▲ 13	---	---
Particles >6µm		ASTM D7647	>1300	▲ 1521	---	---
Particles >14µm		ASTM D7647	>80	▲ 157	---	---
Particles >21µm		ASTM D7647	>20	▲ 48	---	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 20/18/14	---	---

Customer Id: OCECAS
 Sample No.: KCPA011817
 Lab Number: 06025737
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

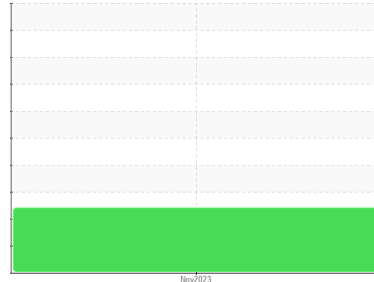

WEAR



Area
[73362414]
 Machine Id
7018737 (S/N 1159)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA011817	---	---
Sample Date	Client Info	27 Nov 2023	---	---
Machine Age	hrs Client Info	23615	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	0	---	---
Chromium ppm ASTM D5185m	>10	0	---	---
Nickel ppm ASTM D5185m	>3	0	---	---
Titanium ppm ASTM D5185m	>3	0	---	---
Silver ppm ASTM D5185m	>2	0	---	---
Aluminum ppm ASTM D5185m	>10	▲ 13	---	---
Lead ppm ASTM D5185m	>10	0	---	---
Copper ppm ASTM D5185m	>50	1	---	---
Tin ppm ASTM D5185m	>10	0	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		0	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m		0	---	---
Calcium ppm ASTM D5185m		0	---	---
Phosphorus ppm ASTM D5185m	500	23	---	---
Zinc ppm ASTM D5185m		0	---	---
Sulfur ppm ASTM D5185m		242	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	0	---	---
Sodium ppm ASTM D5185m		1	---	---
Potassium ppm ASTM D5185m	>20	0	---	---
Water % ASTM D6304	>0.05	0.004	---	---
ppm Water ppm ASTM D6304	>500	48	---	---

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		5502	---	---
Particles >6µm ASTM D7647	>1300	▲ 1521	---	---
Particles >14µm ASTM D7647	>80	▲ 157	---	---
Particles >21µm ASTM D7647	>20	▲ 48	---	---
Particles >38µm ASTM D7647	>4	3	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>--/17/13	▲ 20/18/14	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	1.5	0.83	---	---

OIL ANALYSIS REPORT

▲ Aluminum (ppm)

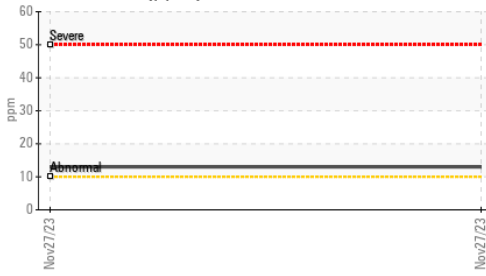


▲ Particle Trend

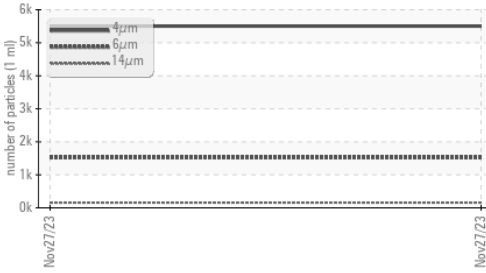

Water (KF)



Acid Number

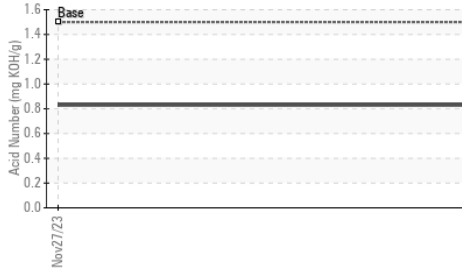



Water (KF)



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	47.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

Ferrous Alloys




Non-ferrous Metals



Viscosity @ 40°C



▲ Particle Count

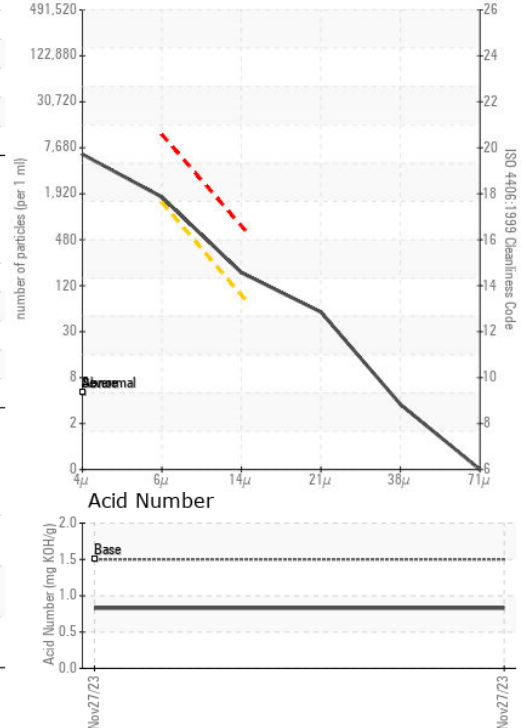

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA011817 **Received** : 05 Dec 2023
Lab Number : 06025737 **Diagnosed** : 07 Dec 2023
Unique Number : 10770237 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

OCEAN MIST FARMS
 13585 BLACKIE RD
 CASTROVILLE, CA
 US 95012
 Contact: Service Manager
 abem@oceanmist.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: