



PROBLEM SUMMARY



Machine Id 7273688 (S/N 2228)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

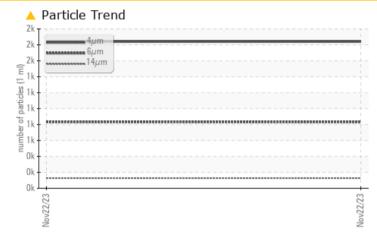

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TE	EST RESULTS			
Sample Status			ATTENTION	
Particles >14µm	ASTM D7647	>80	<u> </u>	
Particles >21µm	ASTM D7647	>20	4 6	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	

Customer Id: DRALIV Sample No.: KCP44927 Lab Number: 06025743 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT





Machine Id 7273688 (S/N 2228) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP44927		
Sample Date		Client Info		22 Nov 2023		
Machine Age	hrs	Client Info		3921		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	12		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	16695		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m	220	۰ <1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D510011	>0.05	0.005		
ppm Water	ppm	ASTM D0304 ASTM D6304	>500	56		
FLUID CLEANLIN		method	limit/base	current	history1	history2
		ASTM D7647		1840		
Particles >4µm		ASTM D7647 ASTM D7647	. 1200			
Particles >6µm			>1300	832		
Particles >14µm		ASTM D7647	>80	▲ 128		
Particles >21µm		ASTM D7647	>20	<u>▲</u> 46		
Particles >38µm		ASTM D7647	>4	4		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/17/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.35		



OIL ANALYSIS REPORT





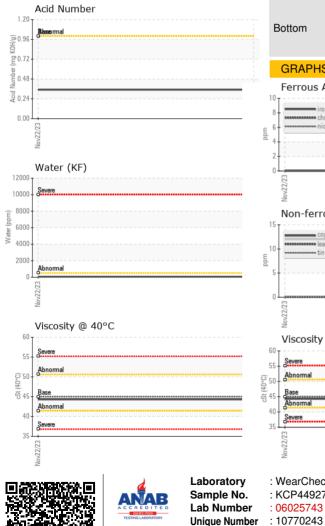

Certificate L2367

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	FIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.3		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				•	no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		20
8 iron			491,520			1 ²⁶
6 - management chromium			122,880	-		-24
4			30,720	******		-22
2						
			7,680			-20
Nov22/23			F2722vol 1.920 120 120			-18 -16 -14
			No cles (p		N	
Non-ferrous Meta	IS		911ed 480			16
copper			jag 120			-14
- tin			30			-12
; .						
			8	Biorexemal		10
//23			2 23			
Nov22/23			Nov22/23			
_ Viscosity @ 40°C			~ 0 4	ہو Acid Number	14µ 21µ	38µ 71µ
T:			1.20	т ¬		
5 - Abnormal			HO 0.96	Absermal		
Rano			£ 0.72			
Abnormal			(B1.20 HO) 0.96 July 0.72 deu 0.48 V 0.24			
			0.24	1		
Severe						
5 EC/27200N			Nov22/23	Nov22/23		- FOCCION

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: 05 Dec 2023

: 07 Dec 2023

Diagnostician : Don Baldridge

Received

Diagnosed

: KCP44927

: 06025743

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)



DRAXLMAIER AUTOMOTIVE

Contact: BRIANNA WALLACE

BRIANNA.WALLACE@DRAEXLMAIER.COM

801 CHALLENGER ST

LIVERMORE, CA

US 94550

T:

F: