




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

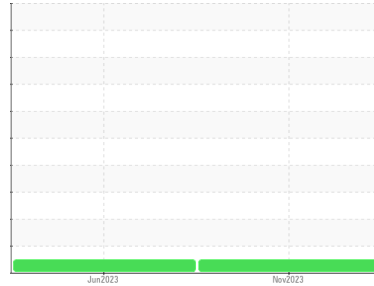

Machine Id
156
 Component
Transmission (Manual)
 Fluid
PETRO CANADA 30W (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0868191	WC0822386	---
Sample Date	Client Info			20 Nov 2023	06 Jun 2023	---
Machine Age	hrs	Client Info		1024	11480	---
Oil Age	hrs	Client Info		247	331	---
Oil Changed	Client Info			Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	9	2	---
Chromium	ppm	ASTM D5185m	>5	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	2	---
Lead	ppm	ASTM D5185m	>45	1	1	---
Copper	ppm	ASTM D5185m	>225	28	25	---
Tin	ppm	ASTM D5185m	>10	0	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		6	7	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		16	22	---
Calcium	ppm	ASTM D5185m		3026	3118	---
Phosphorus	ppm	ASTM D5185m		1016	1010	---
Zinc	ppm	ASTM D5185m		1219	1267	---
Sulfur	ppm	ASTM D5185m		4224	4897	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	5	4	---
Sodium	ppm	ASTM D5185m		8	10	---
Potassium	ppm	ASTM D5185m	>20	0	1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---



OIL ANALYSIS REPORT








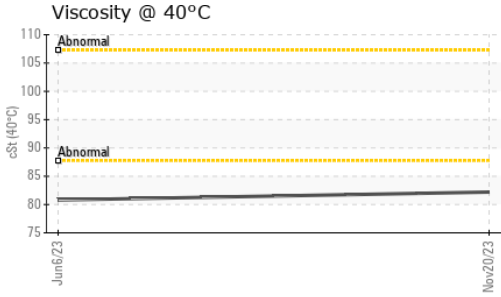


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	82.2	80.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

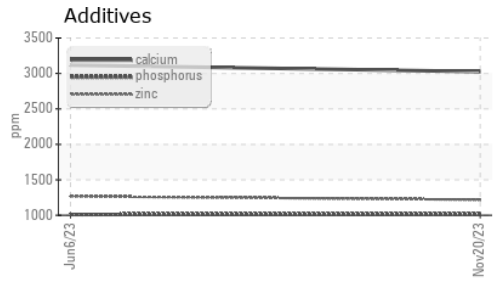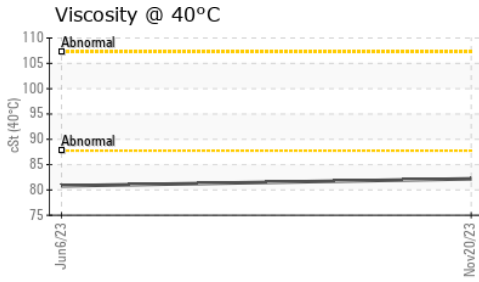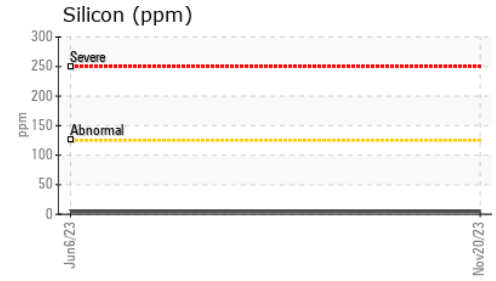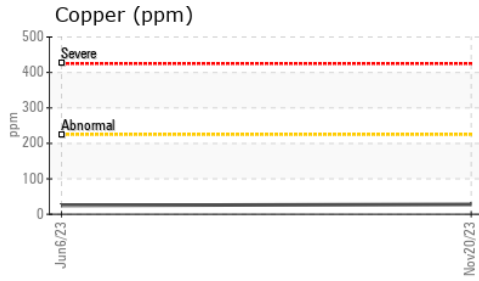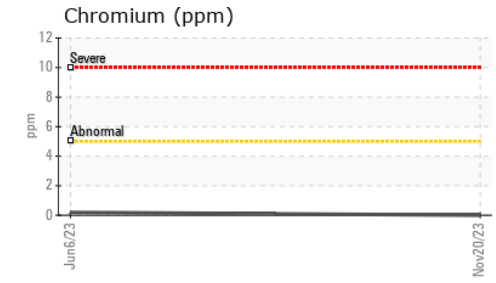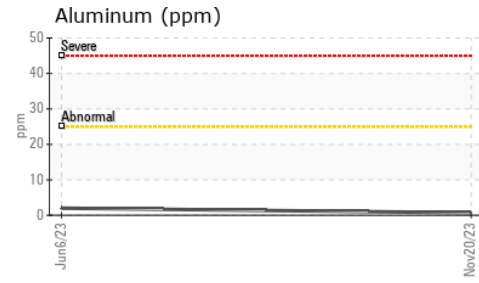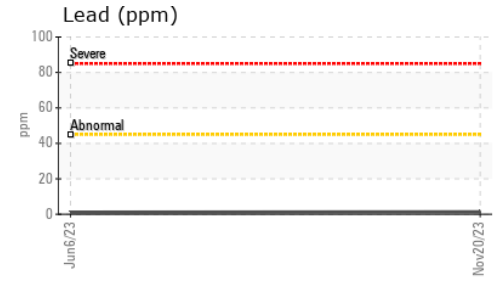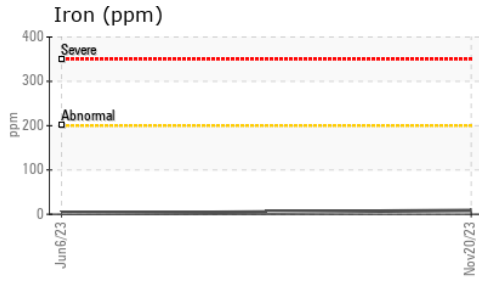

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868191 **Received** : 05 Dec 2023
Lab Number : **06025861** **Diagnosed** : 07 Dec 2023
Unique Number : 10775652 **Diagnostician** : Don Baldrige
Test Package : MOB 1

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: NEIL
 neil@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: