




# OIL ANALYSIS REPORT

Sample Rating Trend

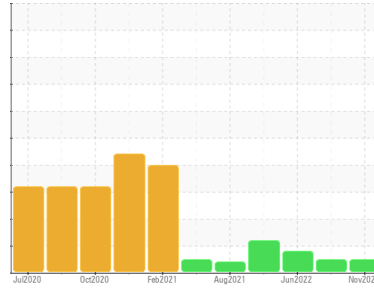

**NORMAL**



Area  
**GM Seattle Off Road Shop**  
 Machine Id  
**[GM Seattle Off Road Shop] 28-432**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PE0002299</b>	PE0000185	PE12230627
Sample Date	Client Info		<b>27 Nov 2023</b>	13 Sep 2022	02 Jun 2022
Machine Age	hrs	Client Info	<b>7339</b>	4489	3915
Oil Age	hrs	Client Info	<b>2850</b>	1302	728
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	MARGINAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 2.9
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	6	4
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	<1	2
Lead	ppm	ASTM D5185m >30	<b>3</b>	<1	0
Copper	ppm	ASTM D5185m >125	<b>5</b>	8	7
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>54</b>	31	43
Barium	ppm	ASTM D5185m	<b>0</b>	3	0
Molybdenum	ppm	ASTM D5185m	<b>46</b>	55	49
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>280</b>	865	880
Calcium	ppm	ASTM D5185m	<b>1798</b>	1266	1204
Phosphorus	ppm	ASTM D5185m	<b>924</b>	987	969
Zinc	ppm	ASTM D5185m	<b>1142</b>	1217	1095
Sulfur	ppm	ASTM D5185m	<b>2798</b>	3758	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	<b>8</b>	5	7
Sodium	ppm	ASTM D5185m >150	<b>4</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.1	<0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.8</b>	10.3	16
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.3</b>	21.8	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.2</b>	18.2	17
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.6</b>	8.6	6.90





# OIL ANALYSIS REPORT

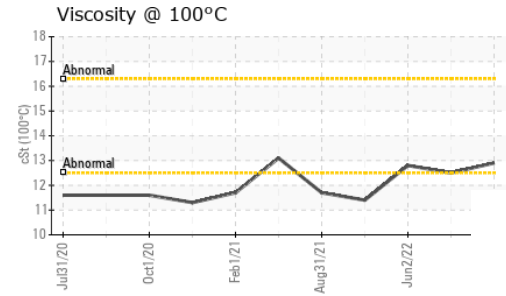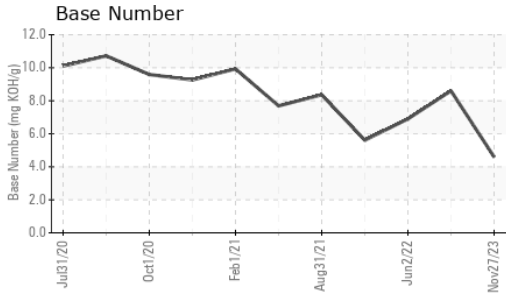

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>12.9</b>	12.5	12.8

## GRAPHS

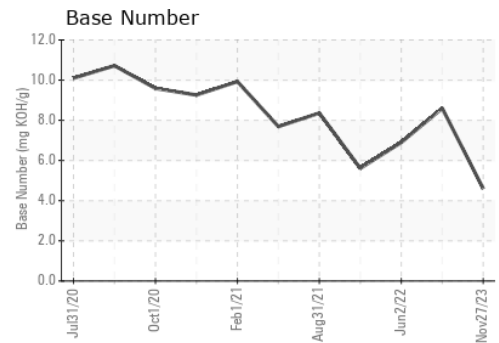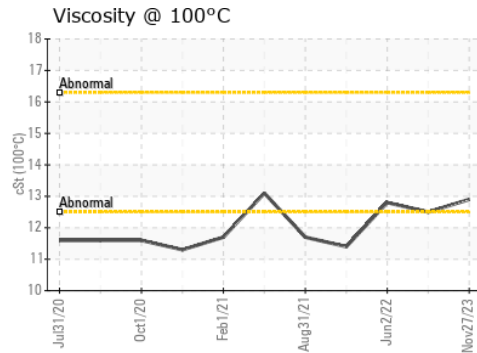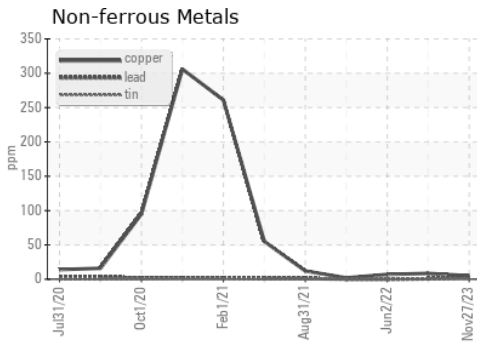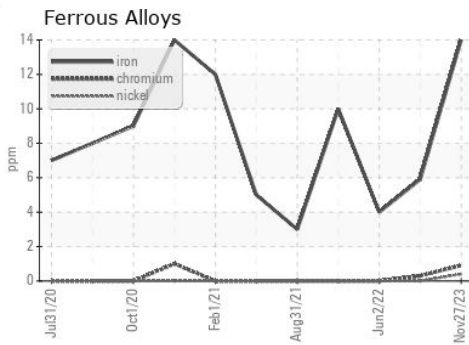

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0002299 **Received** : 06 Dec 2023  
**Lab Number** : **06026065** **Diagnosed** : 07 Dec 2023  
**Unique Number** : 10775856 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN )

**Gary Merlino Construction - Off Road Shop**  
 9125 10TH AVE SOUTH  
 SEATTLE, WA  
 US 98108  
 Contact: Jesse Patterson  
 oilsamples@gmccinc.com  
 T: 1(866)292-1303  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)