
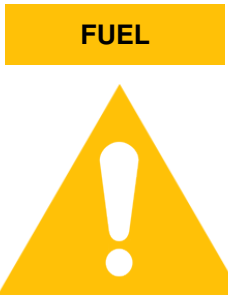


PROBLEM SUMMARY


Area
GM Renton Dump Truck Shop
 Machine Id
[GM Renton Dump Truck Shop] 16-590
 Component
Diesel Engine
 Fluid
SHELL 15W40 (--- GAL)

Sample Rating Trend

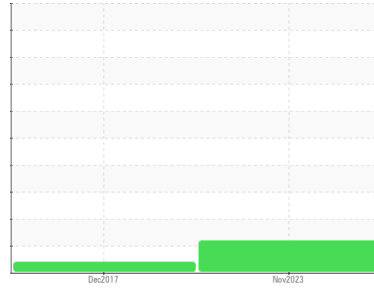


COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

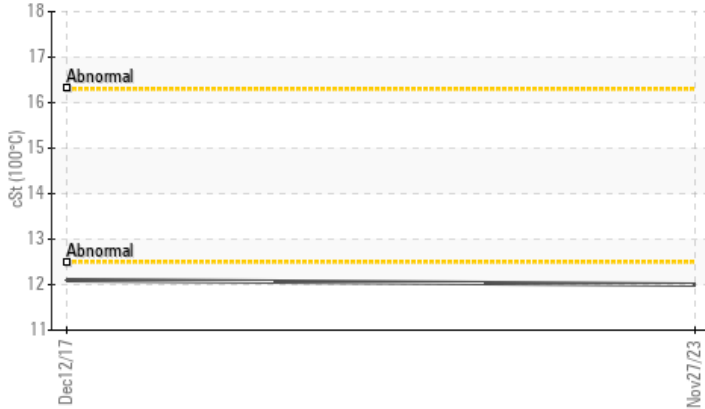

▲ Fuel Dilution

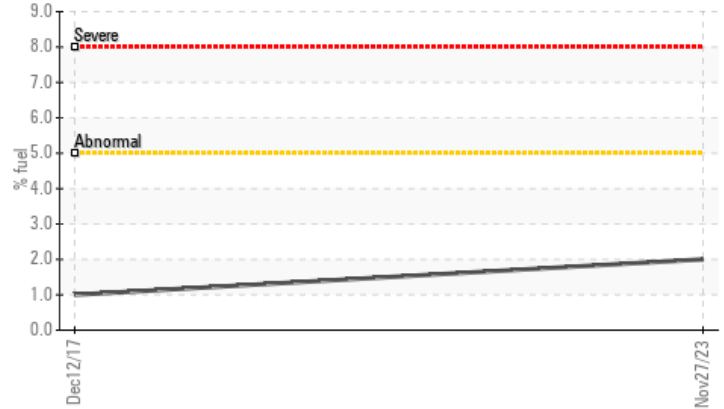

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: New hour meter)

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	MARGINAL	---
Fuel	%	ASTM D3524	>5	▲ 2.0	<1.0	---
Visc @ 100°C	cSt	ASTM D445		▲ 12.0	▲ 12.1	---

Customer Id: GARSEA
 Sample No.: PE0002175
 Lab Number: 06026066
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

12 Dec 2017 Diag: Wes Davis

VISCOSITY



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

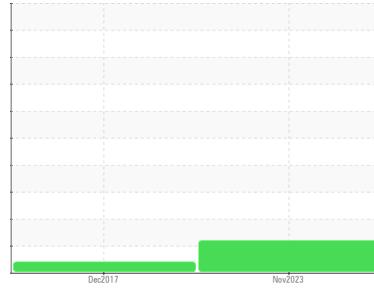

FUEL



Area
GM Renton Dump Truck Shop
 Machine Id
[GM Renton Dump Truck Shop] 16-590
 Component
Diesel Engine
 Fluid
SHELL 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: New hour meter)

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0002175	PE12290848	---
Sample Date	Client Info			27 Nov 2023	12 Dec 2017	---
Machine Age	hrs	Client Info		433	12293	---
Oil Age	hrs	Client Info		433	1281	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				ATTENTION	MARGINAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7	5	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>25	3	3	---
Lead	ppm	ASTM D5185m	>40	1	1	---
Copper	ppm	ASTM D5185m	>330	1	1	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Antimony	ppm	ASTM D5185m		---	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		35	419	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		21	67	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		183	306	---
Calcium	ppm	ASTM D5185m		1951	1606	---
Phosphorus	ppm	ASTM D5185m		921	964	---
Zinc	ppm	ASTM D5185m		1053	1189	---
Sulfur	ppm	ASTM D5185m		3096	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	3	---
Sodium	ppm	ASTM D5185m	>150	1	1	---
Potassium	ppm	ASTM D5185m	>20	1	3	---
Fuel	%	ASTM D3524	>5	▲ 2.0	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	<0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.8	18	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	8.08	---





OIL ANALYSIS REPORT

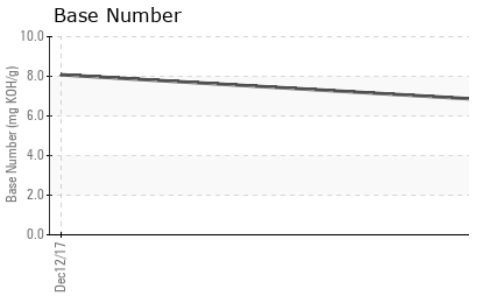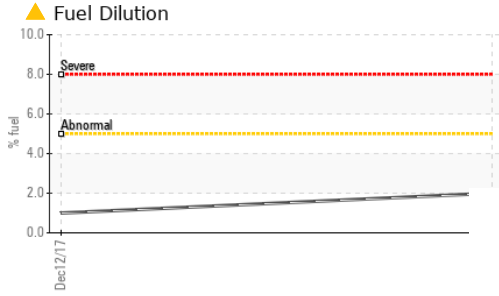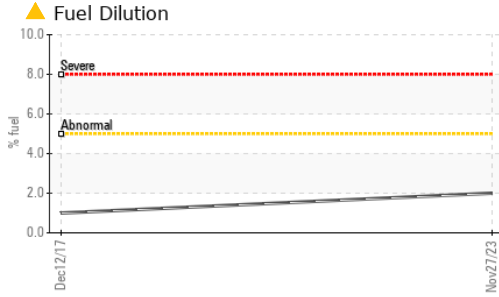

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 12.0	▲ 12.1	---

GRAPHS

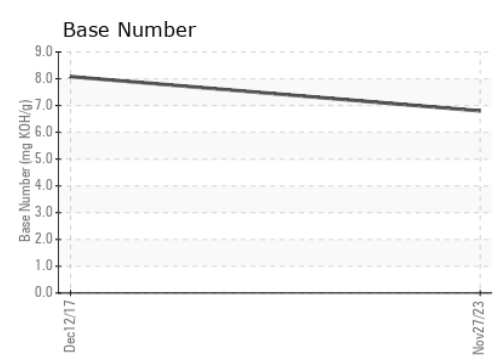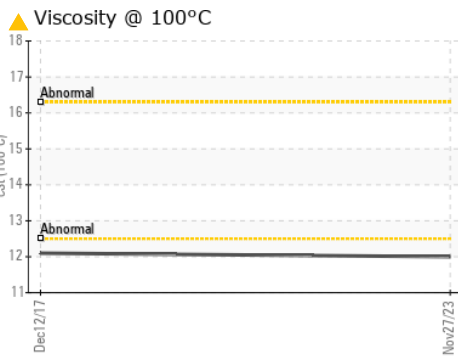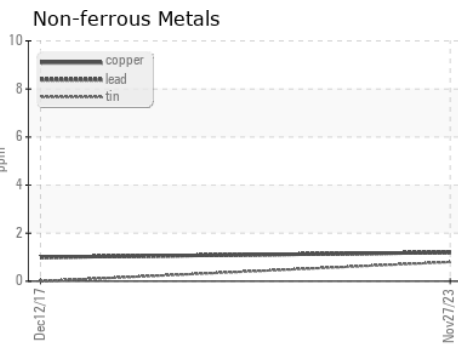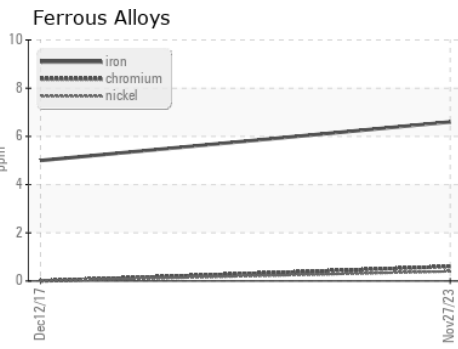

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002175 **Received** : 06 Dec 2023
Lab Number : 06026066 **Diagnosed** : 14 Dec 2023
Unique Number : 10775857 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FT-IR, FuelDilution, ICP, KV100, PercentFuel, SCREEN, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369. Contact: Zack
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T:
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: