




PROBLEM SUMMARY


Sample Rating Trend

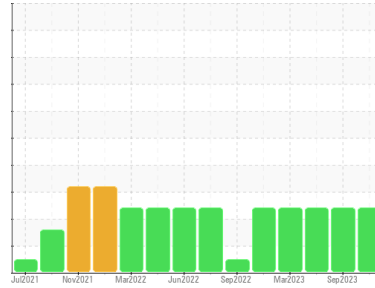


Machine Id
CATERPILLAR D6 LGP 8181 (S/N GZ900341)
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

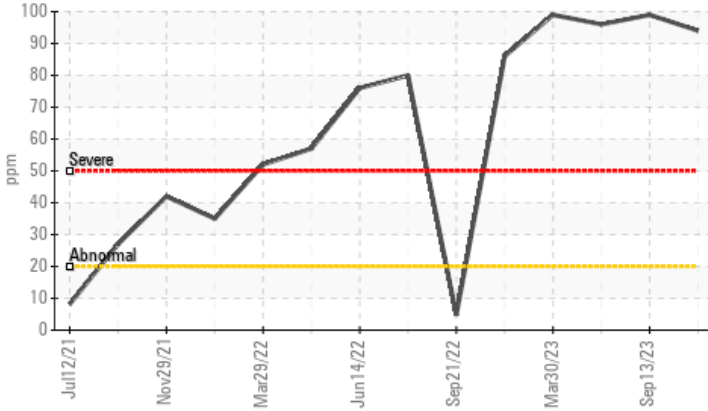

▲ Aluminum (ppm)

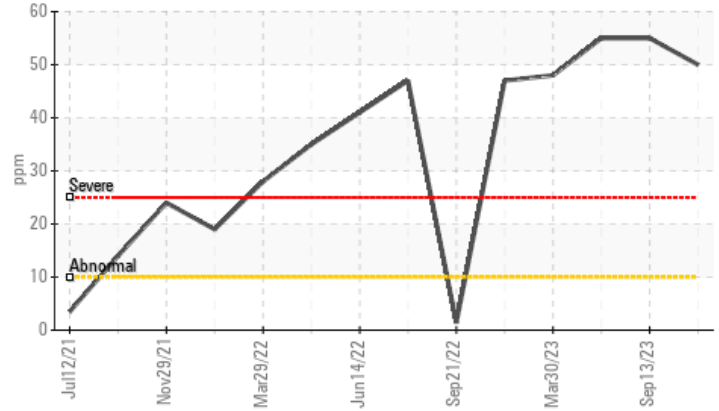

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Aluminum	ppm	ASTM D5185m	>10	▲ 50	▲ 55	▲ 55
Silicon	ppm	ASTM D5185m	>20	▲ 94	▲ 99	▲ 96

Customer Id: TRANEW
 Sample No.: WC0831273
 Lab Number: 06026345
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Check Dirt Access	---	---	?	We advise that you check all areas where dirt can enter the system.

HISTORICAL DIAGNOSIS

13 Sep 2023 Diag: Don Baldrige

DIRT



We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal for time on oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



14 Jun 2023 Diag: Don Baldrige

DIRT



We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal for time on oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



30 Mar 2023 Diag: Don Baldrige

DIRT



We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal for time on oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

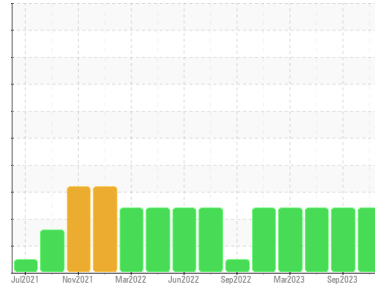

DIRT



Machine Id
CATERPILLAR D6 LGP 8181 (S/N GZ900341)

Component
Hydraulic System
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal for time on oil.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0831273	WC0837031	WC0816276
Sample Date	Client Info		24 Nov 2023	13 Sep 2023	14 Jun 2023
Machine Age	hrs	Client Info	8146	7669	7194
Oil Age	hrs	Client Info	8146	7669	7194
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	47	49	46
Chromium	ppm	ASTM D5185m >10	5	5	5
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	2	2	2
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	▲ 50	▲ 55	▲ 55
Lead	ppm	ASTM D5185m >10	2	1	2
Copper	ppm	ASTM D5185m >75	19	20	21
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	36	38	33
Barium	ppm	ASTM D5185m	0	0	2
Molybdenum	ppm	ASTM D5185m	<1	2	2
Manganese	ppm	ASTM D5185m	1	<1	<1
Magnesium	ppm	ASTM D5185m	36	37	32
Calcium	ppm	ASTM D5185m	1366	1475	1356
Phosphorus	ppm	ASTM D5185m	810	842	844
Zinc	ppm	ASTM D5185m	965	1039	1045
Sulfur	ppm	ASTM D5185m	2220	2681	2588

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	▲ 94	▲ 99	▲ 96
Sodium	ppm	ASTM D5185m	11	9	3
Potassium	ppm	ASTM D5185m >20	6	7	9

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	752	825	1222
Particles >6µm	ASTM D7647	>1300	115	96	184
Particles >14µm	ASTM D7647	>160	12	9	19
Particles >21µm	ASTM D7647	>40	4	3	4
Particles >38µm	ASTM D7647	>10	0	1	0
Particles >71µm	ASTM D7647	>3	0	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/14/11	17/14/10	17/15/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.67	0.67	0.73



OIL ANALYSIS REPORT

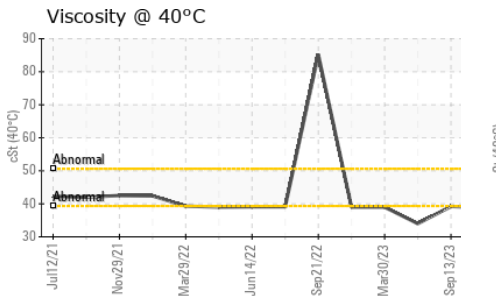
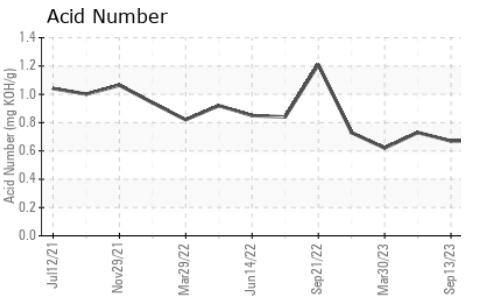
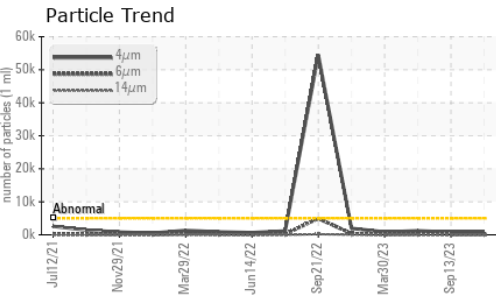
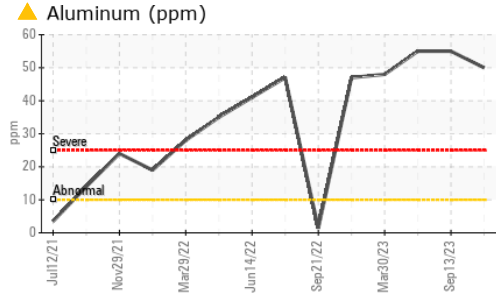
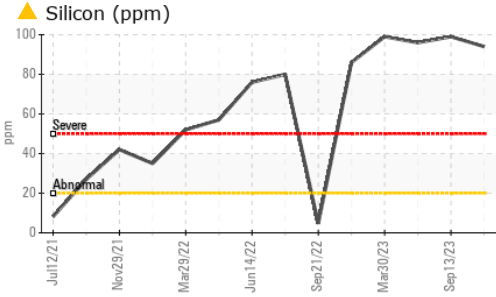


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	38.8	39.2	34.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

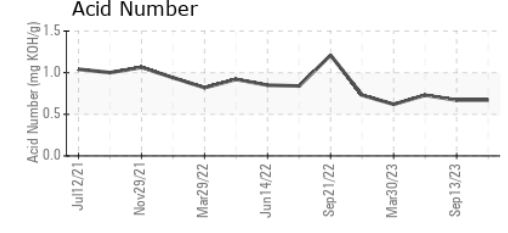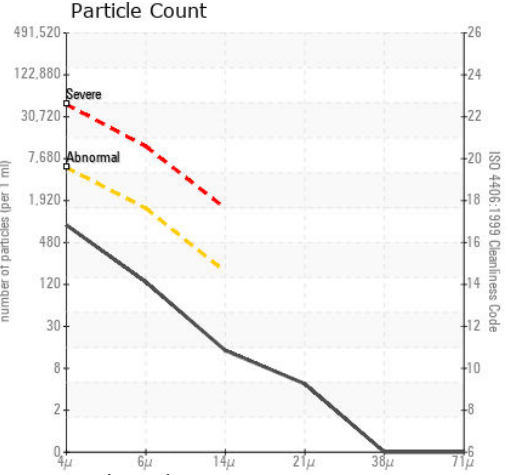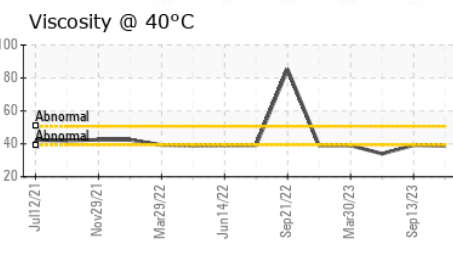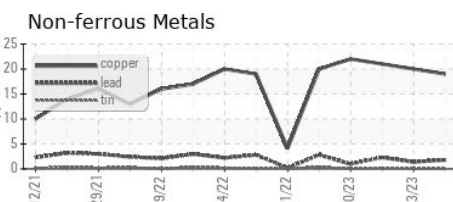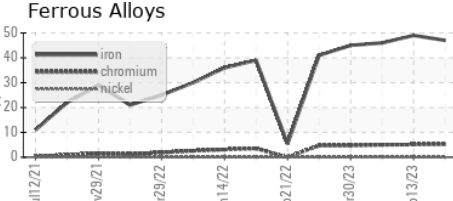

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0831273 **Received** : 06 Dec 2023
Lab Number : 06026345 **Diagnosed** : 07 Dec 2023
Unique Number : 10776136 **Diagnostician** : Jonathan Hester
Test Package : CONST

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mw Wyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)