

OIL ANALYSIS REPORT

Sample Rating Trend



FRONTIER II [200006776] Machine Id 06WEA86928

Component Wind Turbine Gearbox Fluid FUCHS RENOLIN CLP ISO 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Apr2021	Oct2021	Jul2022 Apr2023	Nov2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX06026391	NX05818243	NX05593159
Sample Date		Client Info		27 Nov 2023	04 Apr 2023	14 Jul 2022
Machine Age	hrs	Client Info		0	12284	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	12	11	24
Iron	ppm	ASTM D5185m	>150	16	15	8
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>20	1	1	<1
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	4	5
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		0	4	0
Calcium	ppm	ASTM D5185m		18	17	6
Phosphorus	ppm	ASTM D5185m		176	188	173
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		4723	5385	4391
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9	8	4
Sodium	ppm	ASTM D5185m	>20	5	3	1
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water	%	ASTM D6304	>0.05	0.004	0.003	0.015
ppm Water	ppm	ASTM D6304	>500	43	33.7	150.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		41107	12020	17377
Particles >6µm		ASTM D7647	>2500	1242	842	2040
Particles >14µm		ASTM D7647	>320	40	69	75
Particles >21µm		ASTM D7647	>80	8	15	12
Particles >38µm		ASTM D7647	>20	1	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	23/17/12	21/17/13	21/18/13
		(-)				



Water (KF)

1200 S

400

200

200

150

문100 50

j,

0

nr28/3


PQ

OIL ANALYSIS REPORT

Color

Bottom

	FLUID DEGRADA	ATION	method			
	Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.41
	VISUAL		method	limit/base	current	history1
	White Metal	scalar	*Visual	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE
	Precipitate	scalar	*Visual	NONE	NONE	NONE
1/23	Silt	scalar	*Visual	NONE	NONE	NONE
Nov27/23	Debris	scalar	*Visual	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
	Free Water	scalar	*Visual		NEG	NEG
	FLUID PROPERT	TIES	method	limit/base	current	history1
	Visc @ 40°C	cSt	ASTM D445	320	324	328
Nov27/23	SAMPLE IMAGES	S	method	limit/base	current	history1

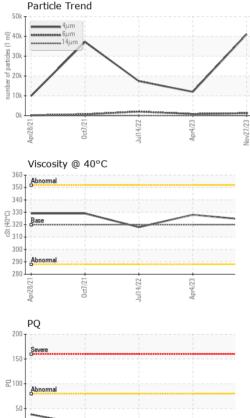

114/27

ise	history1	history2

0.51

NONE

NONE

NONE

NONE

NONE


NONE


NORML

NORML

NEG NEG

318

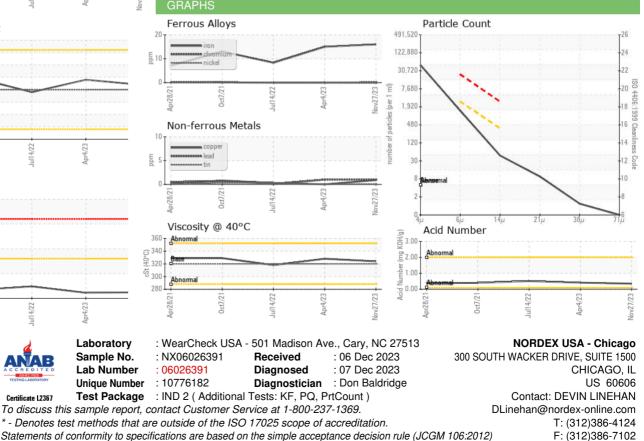



Certificate L2367