

PROBLEM SUMMARY

Sample Rating Trend

VIS DEBRIS

Machine Id

KAESER ASD 40T 5610370 (S/N 1181)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL	ATTENTION	ABNORMAL		
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT	NONE		

Customer Id: INTCARKC Sample No.: KC127420 Lab Number: 06026415 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

05 Jun 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



17 Feb 2022 Diag: Jonathan Hester

150



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



20 Aug 2020 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Maralata a Ial

KAESER ASD 40T 5610370 (S/N 1181)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

MAESER SIGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		40/2016 May	2017 Nov2017 May2018	Jan2019 Aug2019 Aug2020	Jun2023	
SAMPLE INFORM	MATION	I method	limit/base	current	history1	history2
Sample Number		Client Info		KC127420	KC101878	KC96877
Sample Date		Client Info		30 Nov 2023	05 Jun 2023	17 Feb 2022
Machine Age	hrs	Client Info		28912	26165	21855
Oil Age	hrs	Client Info		0	3425	968
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	6	12
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	26	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	90	63	29	9
Calcium	ppm	ASTM D5185m	2	2	0	0
Phosphorus	ppm	ASTM D5185m		2	2	5
Zinc	ppm	ASTM D5185m		0	16	33
CONTAMINANTS	8	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		18	11	4
Potassium	ppm	ASTM D5185m	>20	3	5	0
Water	%	ASTM D6304	>0.05	0.010	0.016	0.008
ppm Water	ppm	ASTM D6304	>500	109	167.4	89.9
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2

Particles >4µm

Particles >6µm

Particles >14µm

Particles >21µm

Particles >38µm

Particles >71µm

Oil Cleanliness

Acid Number (AN)

FLUID DEGRADATION

ASTM D7647

ASTM D7647

ISO 4406 (c)

method

mg KOH/g ASTM D8045 0.4

ASTM D7647 >1300

ASTM D7647 >20

ASTM D7647 >4

ASTM D7647 >3

>--/17/13

limit/base

1496

783

<u>126</u>

28

0

current

0.32

18/17/14

0.38

history1

history2

5218

2212

<u></u> 351

<u>^</u> 78


0


▲ 18/16


0.36





OIL ANALYSIS REPORT

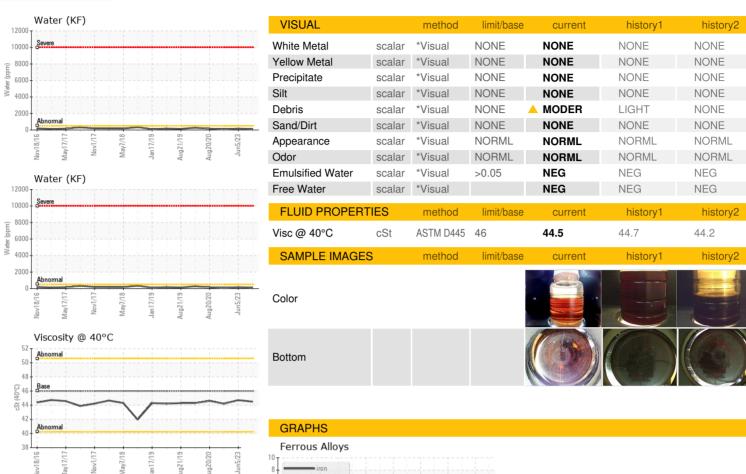







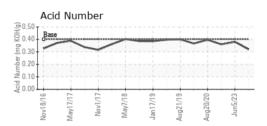





Certificate L2367

Test Package

Laboratory Sample No. Lab Number **Unique Number**

: KC127420 : 06026415 : 10776206 : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed Diagnostician

: 06 Dec 2023 : 07 Dec 2023 : Don Baldridge **INTELLIGRATED - AMAZON** 8003 INDUSTRIAL AVE

CARTERET, NJ US 07008

Contact:

T: F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)