

No relevant graphs to display

RECOMMENDATION	
----------------	--

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Debris	scalar	*Visual	NONE	A MODER	NONE	LIGHT

Customer Id: ALPDEN Sample No.: KCPA009477 Lab Number: 06026423 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDE	D ACTIONS			
Action	Status	Date	Done By	Des
Alert			?	We parti

Description

We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



14 Mar 2023 Diag: Doug Bogart

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



06 Jul 2022 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





OIL ANALYSIS

FLUID DEGRADATION

Acid Number (AN)

method

mg KOH/g ASTM D8045 1.0

limit/base

Machine Id KAESER CSD 125 7941425 (S Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample Rating Trend VIS DEBRIS						
	4 \					
5 (S/N 1084	+)					
		Ju	12022	Mar2023 Nov20	23	
SAMPLE INFOR		method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009477	KCPA000258	KCP45381
Sample Date		Client Info		16 Nov 2023	14 Mar 2023	06 Jul 2022
Machine Age	hrs	Client Info		10767	7798	4428
Oil Age	hrs	Client Info		0	0	4428
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	4	3	6
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	2	58	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	100	27	55	6
Calcium	ppm	ASTM D5185m	0	0	1	0
Phosphorus	ppm	ASTM D5185m	0	2	7	0
Zinc Sulfur	ppm	ASTM D5185m ASTM D5185m	0 23500	0 17816	2 22249	0 16768
	ppm					
CONTAMINANTS		Method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	0
Sodium Potassium	ppm	ASTM D5185m ASTM D5185m	>20	11 <1	0	0 <1
Water	ppm %	ASTM D5185m ASTM D6304	>20	<1 0.018	2 0.011	<1 0.013
ppm Water	ppm	ASTM D0304 ASTM D6304	>500	188	114.8	136.6
FLUID CLEANLI		method	limit/base		history1	history2
						11630
Particles >4µm Particles >6µm		ASTM D7647 ASTM D7647	>1200		139511 2 6388	▲ 3290
Particles >0µm Particles >14µm		ASTM D7647 ASTM D7647	>80		▲ 100	▲ 3290 ▲ 275
Particles >21µm					7	▲ 53
Particles >38µm		ASTM D7647 ASTM D7647	>20		1	3
Particles >71µm		ASTM D7647			0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13		A 24/22/14	▲ 21/19/15
2			, , ,			

0.45

history1

current


0.37


history2


0.44



OIL ANALYSIS REPORT

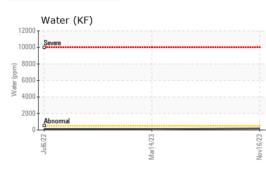

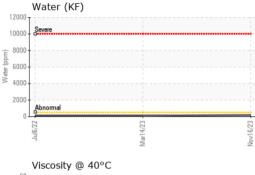

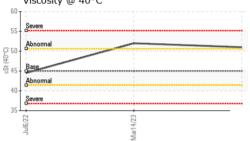


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	🔺 MODER	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	51.0	52.0	44.5
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Color



Bottom

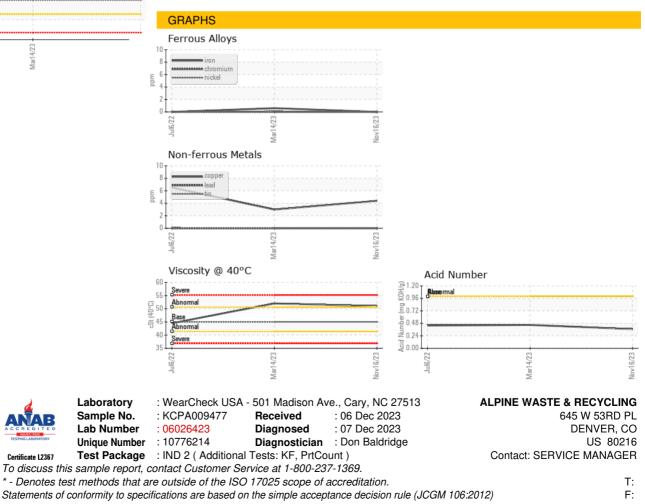

Contact/Location: SERVICE MANAGER ? - ALPDEN