

## **PROBLEM SUMMARY**

Sample Rating Trend

ISO

Machine Id


# KAESER BSD 60T 6090053 (S/N 1158)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **COMPONENT CONDITION SUMMARY**

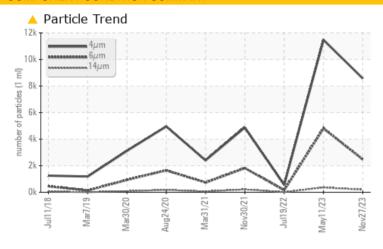

### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	NORMAL				
Particles >6µm	ASTM D7647	>1300	<u> </u>	<b>▲</b> 4813	164				
Particles >14μm	ASTM D7647	>80	<u> </u>	<b>△</b> 360	13				
Particles >21µm	ASTM D7647	>20	<u> </u>	<b>△</b> 59	2				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>20/18/15</b>	21/19/16	16/15/11				

Customer Id: AMAAUR Sample No.: KCPA011819 Lab Number: 06026438 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 11 May 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 19 Jul 2022 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



### 30 Nov 2021 Diag: Jonathan Hester

150




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

Sample Rating Trend

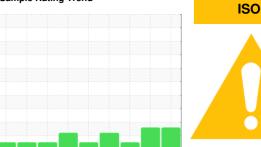

## KAESER BSD 60T 6090053 (S/N 1158)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2018 Ma	r2019 Mar2020 Aug2020	Mar2021 Nov2021 Jul2022 May20	23 Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011819	KCP55458	KCP49517
Sample Date		Client Info		27 Nov 2023	11 May 2023	19 Jul 2022
Machine Age	hrs	Client Info		26973	24614	21024
Oil Age	hrs	Client Info		0	3000	2401
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	<1	1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	53	60	31
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	100	79	96	85
Calcium	ppm	ASTM D5185m	0	3	0	0
Phosphorus	ppm	ASTM D5185m	0	2	0	0
Zinc	ppm	ASTM D5185m	0	0	5	0
Sulfur	ppm	ASTM D5185m	23500	17886	22691	19825
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		13	17	11
Potassium	ppm	ASTM D5185m	>20	1	4	4
Water	%	ASTM D6304	>0.05	0.004	0.025	0.021
ppm Water	ppm	ASTM D6304	>500	47	250.2	219.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		8574	11480	553
Particles >6µm		ASTM D7647		<u>^</u> 2479	<u>4813</u>	164
Particles >14µm		ASTM D7647	>80	<u> </u>	<u>^</u> 360	13
Particles >21µm		ASTM D7647	>20	<u></u> 54	<u></u> 59	2
Particles >38µm		ASTM D7647	>4	2	4	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15	<u>^</u> 21/19/16	16/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



### **OIL ANALYSIS REPORT**

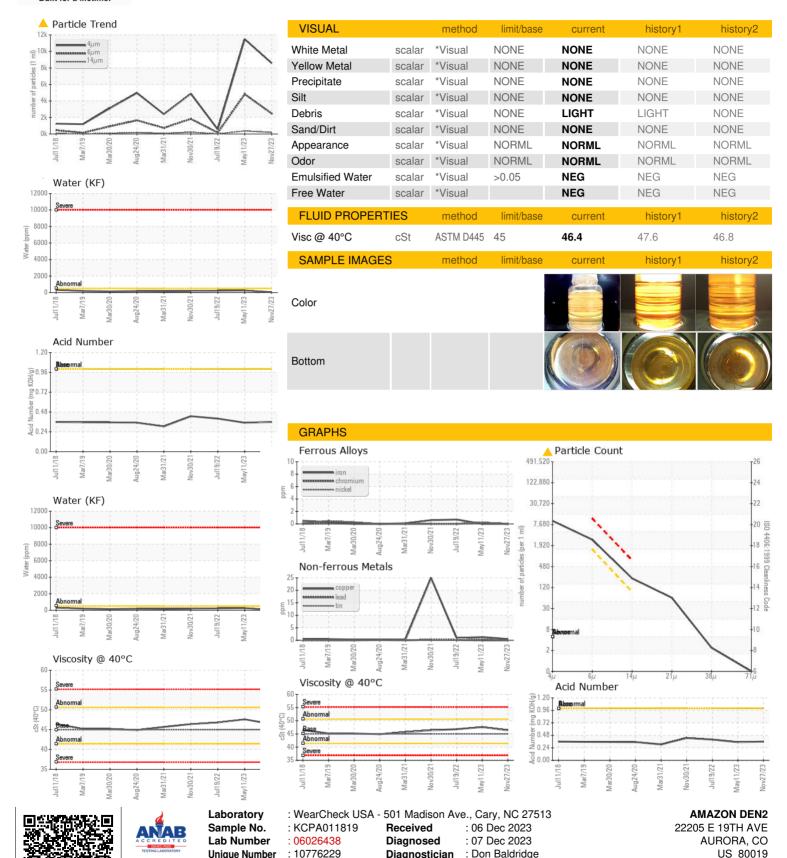

Test Package : IND 2 ( Additional Tests: KF, PrtCount )

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate L2367

T: F:

Contact: Service Manager