



## **PROBLEM SUMMARY**

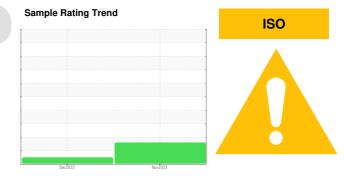

### <sup>Machine Id</sup> 3978533 (S/N 4324) Component

Compressor KAESER SIGMA (OEM) M-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

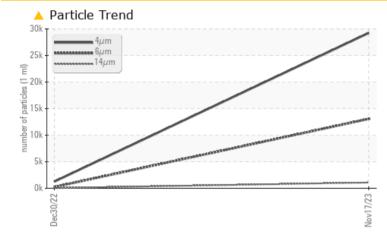

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status NORMAL ABNORMAL Particles >6µm ASTM D7647 >1300 **13070** 240 Particles >14µm ASTM D7647 >80 **1079** 42 Particles >21µm ASTM D7647 >20 207 19 **Oil Cleanliness** ISO 4406 (c) >--/17/13 A 22/21/17 17/15/13

Customer Id: INNENG Sample No.: KCPA003810 Lab Number: 06026442 Test Package: IND 2



To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 30 Dec 2022 Diag: Jonathan Hester





Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





### **OIL ANALYSIS REPORT**

#### Sample Rating Trend

ISO

Machine Id **3978533 (S/N 4324)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Dec2022	Nov2023		
SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA003810	KCP47533	
Sample Date		Client Info		17 Nov 2023	30 Dec 2022	
Machine Age	hrs	Client Info		17534	14877	
Oil Age	hrs	Client Info		0	2700	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		<1	1	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	31	23	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	75	67	
Calcium	ppm	ASTM D5185m	0	<1	1	
Phosphorus	ppm	ASTM D5185m	0	2	4	
Zinc	ppm	ASTM D5185m	0	0	3	
Sulfur	ppm	ASTM D5185m	23500	17415	19049	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	
Sodium	ppm	ASTM D5185m		16	15	
Potassium	ppm	ASTM D5185m	>20	<1	3	
Water	%	ASTM D6304	>0.05	0.004	0.009	
ppm Water	ppm	ASTM D6304	>500	45	90.0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		29245	1262	
Particles >6µm		ASTM D7647	>1300	<u> </u>	240	
Particles >14µm		ASTM D7647	>80	<u> </u>	42	
Particles >21µm		ASTM D7647	>20	<u> </u>	19	
Particles >38µm		ASTM D7647	>4	2	3	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>22/21/17</b>	17/15/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.37	
( /	99			-	-	




Built for a lifetime.

# **OIL ANALYSIS REPORT**

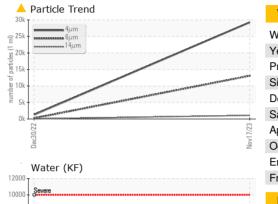




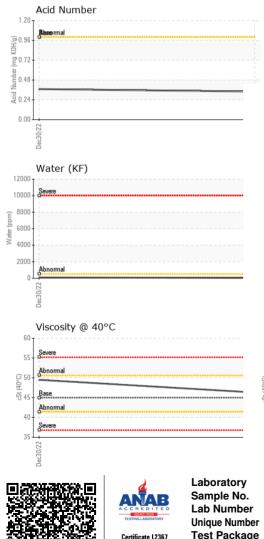

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.3	49.5	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				•		no image
Color Bottom						no image no image
Bottom GRAPHS Ferrous Alloys			491,520	Particle Count		
Bottom GRAPHS Ferrous Alloys			491,520	Particle Count		no image
Bottom GRAPHS Ferrous Alloys			491,520	Particle Count		no image

### В

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

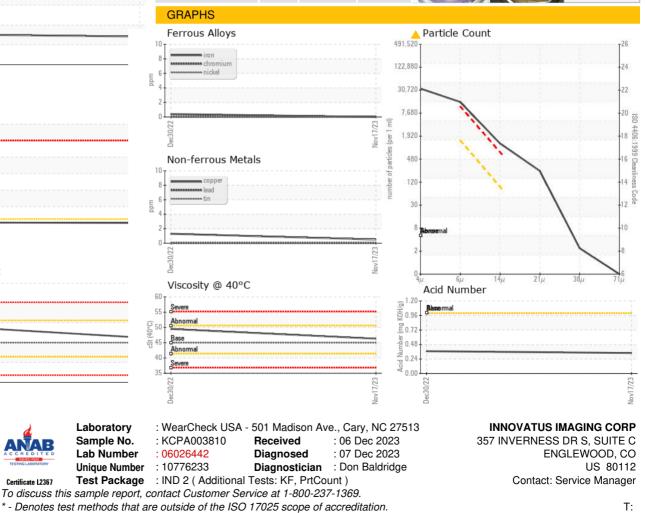

Report Id: INNENG [WUSCAR] 06026442 (Generated: 12/08/2023 06:45:25) Rev: 1

Contact/Location: Service Manager - INNENG

F: