

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SK 26 1621484 (S/N 1269)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Apr2019 Aug2021 Oct2022 Nov2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011488	KCP46814	KCP42834
Sample Date		Client Info		27 Nov 2023	04 Oct 2022	16 Aug 2021
Machine Age	hrs	Client Info		25218	21644	18265
Oil Age	hrs	Client Info		0	6882	3500
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m		0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		3	5	3
Tin		ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	210			0
Antimony Vanadium	ppm			0	<1	0
	ppm	ASTM D5185m				
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	18	0	16
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	54	37	59
Calcium	ppm	ASTM D5185m	2	<1	0	<1
Phosphorus	ppm	ASTM D5185m		2	10	2
Zinc	ppm	ASTM D5185m		0	15	12
Sulfur	ppm	ASTM D5185m		16951	19377	15537
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		28	19	25
Potassium	ppm	ASTM D5185m	>20	2	0	2
Water	%	ASTM D6304		0.006	0.017	0.030
ppm Water	ppm	ASTM D6304	>500	70	170.9	300.5
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2628	2386	4236
Particles >6µm		ASTM D7647	>1300	325	768	▲ 1622
Particles >14µm		ASTM D7647	>80	14	64	▲ 152
Particles >21µm		ASTM D7647		3	11	▲ 22
Particles >38µm		ASTM D7647	>4	0	1	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/16/11	18/17/13	▲ 18/14
FLUID DEGRADA	ATION _	method	limit/base		history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.30	0.36	0.316
	iiiy i∖∪⊓/ÿ	AG I IVI D0040	0.4			

Report Id: QUEALL [WUSCAR] 06026463 (Generated: 12/07/2023 10:21:50) Rev: 1

Contact/Location: Service Manager - QUEALL



1200

10000

800 Water (ppm)

600

400

2000

14 12 Î

10 mber of particles (1 8k

6k

41 2 0

12000

100

200

52 50

48

() 46 Ba

to 44

47

40

38

14

10

8

61

4

2

0


of particles (1 ml)


Anr16

L L

Water (ppm) 600 400 nrl

OIL ANALYSIS REPORT

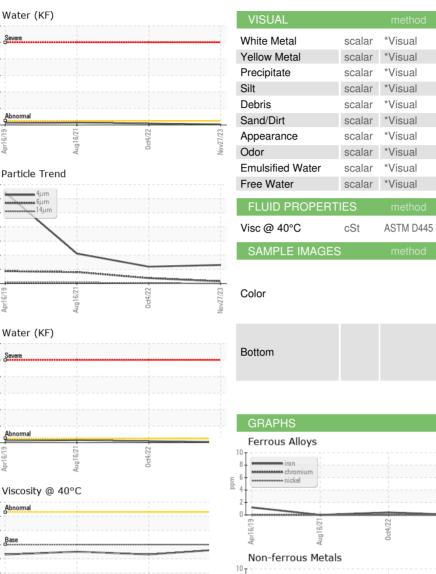



NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

44.6

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

45.0

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

45.3

NONE

NONE

NONE

NONE

NONE


NONE

NORML

NORML

>0.05

46

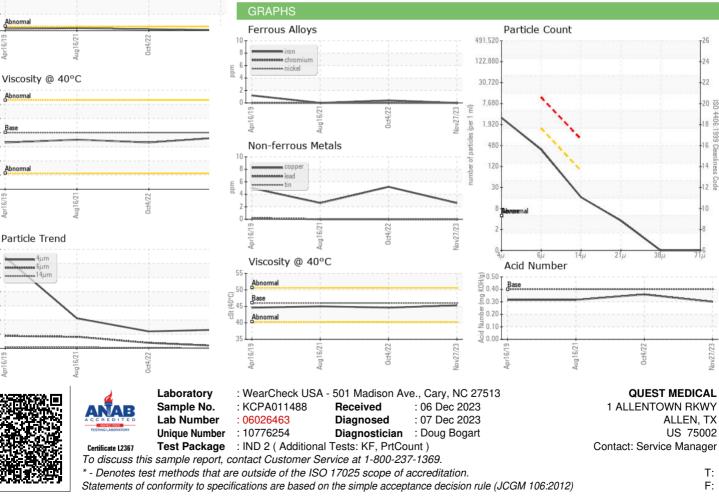

Contact/Location: Service Manager - QUEALL