



# **PROBLEM SUMMARY**

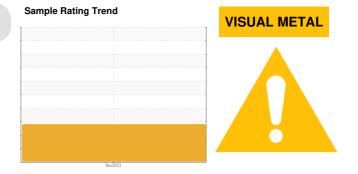

Machine Id CYG\_MLU3 Component Outboard Pump Fluid NOT GIVEN (--- GAL)

## COMPONENT CONDITION SUMMARY

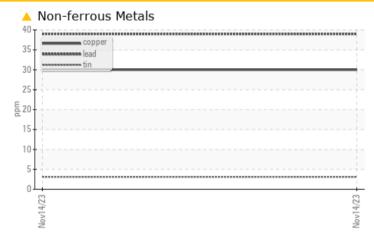

#### RECOMMENDATION

We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL					
Lead	ppm	ASTM D5185m	>12	<u> </u>					
Copper	ppm	ASTM D5185m	>30	<b>A</b> 30					
Yellow Metal	scalar	*Visual	NONE	A MODER					

Customer Id: ENECYG Sample No.: RP0032973 Lab Number: 06026587 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Inspect Wear Source			?	We advise that you inspect for the source(s) of wear.		
Resample			?	We recommend an early resample to monitor this condition.		

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id CYG MLU3 Component **Outboard Pump** Fluid NOT GIVEN (--- GAL)

#### DIAGNOSIS

#### A Recommendation

We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

## 🔺 Wear

Moderate concentration of visible metal present. Bearing and/or bushing wear is indicated.

## Contamination

The water content is negligible. There is no indication of any contamination in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid.

Sample NumberClient InfoRP0032973Sample DateClient Info14 Nov 2023Machine AgehrsClient Info0Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusImather of the second	    history2     
Sample DateClient Info14 Nov 2023Machine AgehrsClient Info0Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusImageImageN/AWEAR METALSmethodIimit/basecurrenthistory1IronppmASTM D5185m>901NickelppmASTM D5185m>50NickelppmASTM D5185m>3<1	  history2     
Machine AgehrsClient Info0Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusIImit/baseABNORMALWEAR METALSmethodlimit/basecurrenthistory1IronppmASTM D5185m>901ChromiumppmASTM D5185m>50NickelppmASTM D5185m>3<1	  history2     
Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusImageImageABNORMALWEAR METALSmethodlimit/basecurrenthistory1IronppmASTM D5185m>901ChromiumppmASTM D5185m>50NickelppmASTM D5185m>50TitaniumppmASTM D5185m>3<1	 history2     
Oil Changed Sample StatusClient InfoN/AWEAR METALSmethodlimit/basecurrenthistory1IronppmASTM D5185m>901ChromiumppmASTM D5185m>50NickelppmASTM D5185m>50TitaniumppmASTM D5185m>3<1SilverppmASTM D5185m>30AluminumppmASTM D5185m>30LeadppmASTM D5185m>12A30CopperppmASTM D5185m>30A 30	 history2     
Sample StatusImage:	history2
Iron         ppm         ASTM D5185m         >90         1            Chromium         ppm         ASTM D5185m         >5         0            Nickel         ppm         ASTM D5185m         >5         0            Titanium         ppm         ASTM D5185m         >3         <1            Silver         ppm         ASTM D5185m         >3         0            Aluminum         ppm         ASTM D5185m         >7         0            Lead         ppm         ASTM D5185m         >12         39            Copper         ppm         ASTM D5185m         >30         A<         30	  
Iron         ppm         ASTM D5185m         >90         1            Chromium         ppm         ASTM D5185m         >5         0            Nickel         ppm         ASTM D5185m         >5         0            Titanium         ppm         ASTM D5185m         >3         <1            Silver         ppm         ASTM D5185m         >3         0            Aluminum         ppm         ASTM D5185m         >7         0            Lead         ppm         ASTM D5185m         >12         A39            Copper         ppm         ASTM D5185m         >30         A         30	  
Chromium         ppm         ASTM D5185m         >5         0            Nickel         ppm         ASTM D5185m         >5         0            Titanium         ppm         ASTM D5185m         >3         <1	
Nickel         ppm         ASTM D5185m         >5         0            Titanium         ppm         ASTM D5185m         >3         <1	
Titanium         ppm         ASTM D5185m         >3         <1            Silver         ppm         ASTM D5185m         >3         0            Aluminum         ppm         ASTM D5185m         >7         0            Lead         ppm         ASTM D5185m         >12         A 39            Copper         ppm         ASTM D5185m         >30         A 30	
Silver         ppm         ASTM D5185m         >3         0            Aluminum         ppm         ASTM D5185m         >7         0            Lead         ppm         ASTM D5185m         >12         A 39            Copper         ppm         ASTM D5185m         >30         A 30	
Aluminum         ppm         ASTM D5185m         >7         0            Lead         ppm         ASTM D5185m         >12 <b>A 39</b> Copper         ppm         ASTM D5185m         >30 <b>A 30</b>	
Lead         ppm         ASTM D5185m         >12 <b>A 39</b> Copper         ppm         ASTM D5185m         >30 <b>A 30</b>	
Copper         ppm         ASTM D5185m         >30 <b>4 30</b>	
Tin         ppm         ASTM D5185m         >9         3	
Vanadium ppm ASTM D5185m <1	
Cadmium         ppm         ASTM D5185m         O	
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185m 0	
Barium ppm ASTM D5185m 0	
Molybdenum         ppm         ASTM D5185m         O	
Manganese ppm ASTM D5185m 0	
Magnesium   ppm   ASTM D5185m   61	
Calcium ppm ASTM D5185m 0	
Phosphorus ppm ASTM D5185m <b>0</b>	
Zinc ppm ASTM D5185m 3	
CONTAMINANTS method limit/base current history1	history2
Silicon ppm ASTM D5185m >60 <1	
Sodium         ppm         ASTM D5185m         6	
Potassium ppm ASTM D5185m >20 0	
Water         %         ASTM D6304         >.1         0.016	
ppm Water ppm ASTM D6304 >1000 165	
FLUID DEGRADATION method limit/base current history1	history2
Acid Number (AN)         mg KOH/g         ASTM D8045         0.32	
VISUAL method limit/base current history1	history2
White Metal scalar *Visual NONE NONE	
Yellow Metal scalar *Visual NONE A MODER	
Precipitate scalar *Visual NONE NONE	
Silt scalar *Visual NONE NONE	
Debris scalar *Visual NONE NONE	
Sand/Dirt scalar *Visual NONE NONE	
Appearance scalar *Visual NORML NORML	
Odor scalar *Visual NORML NORML	
Emulsified Water scalar *Visual >.1 NEG	
Free Water scalar *Visual NEG on: Service Mana	ager-=-ENECYG



# **OIL ANALYSIS REPORT**

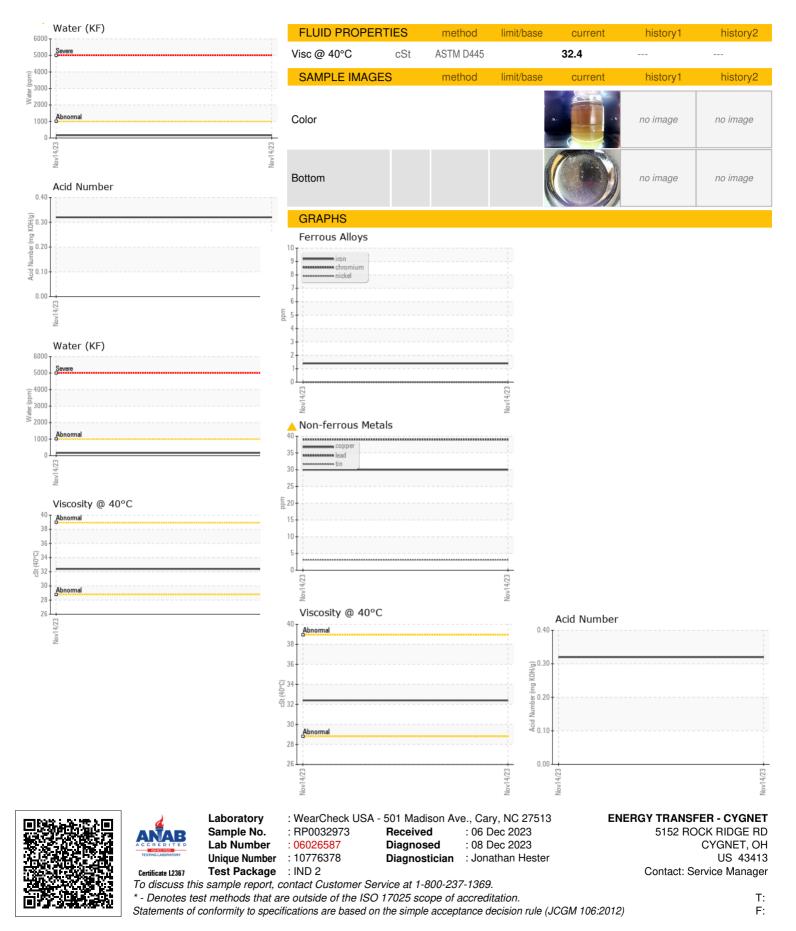

Contact/Location: Service Manager - ENECYG