




# OIL ANALYSIS REPORT

Sample Rating Trend

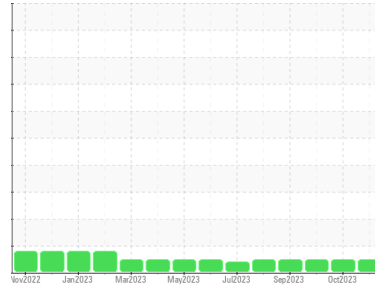

**NORMAL**



Area  
**West Virginia**  
 Machine Id  
**[West Virginia] Oil - Starboard Main Engine**  
 Component  
**Starboard Main Engine**  
 Fluid  
**MARATHON 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0769034</b>	WC0805457	WC0804881
Sample Date	Client Info		<b>27 Nov 2023</b>	27 Oct 2023	01 Oct 2023
Machine Age	hrs	Client Info	<b>39717</b>	39066	38557
Oil Age	hrs	Client Info	<b>859</b>	208	790
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>2</b>	2	4
Chromium	ppm	ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	5	1
Lead	ppm	ASTM D5185m >18	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >80	<b>2</b>	<1	4
Tin	ppm	ASTM D5185m >14	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>322</b>	372	395
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>114</b>	132	123
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>672</b>	662	655
Calcium	ppm	ASTM D5185m	<b>1468</b>	1437	1518
Phosphorus	ppm	ASTM D5185m	<b>720</b>	718	685
Zinc	ppm	ASTM D5185m	<b>849</b>	854	812
Sulfur	ppm	ASTM D5185m	<b>2334</b>	3119	2454

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	5	5
Sodium	ppm	ASTM D5185m >75	<b>&lt;1</b>	3	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	5.0	5.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.1</b>	22.5	22.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.8</b>	15.5	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>10.14</b>	12.48	10.30







# OIL ANALYSIS REPORT

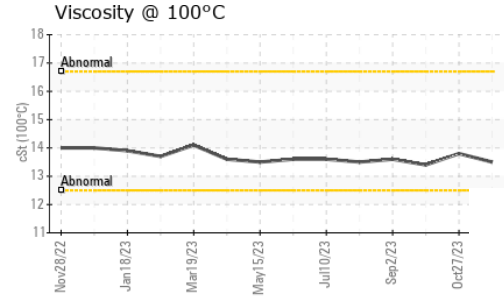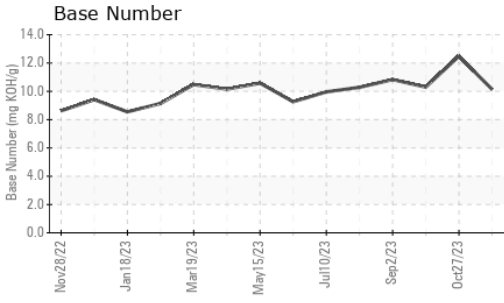

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.5</b>	13.8	13.4

## GRAPHS

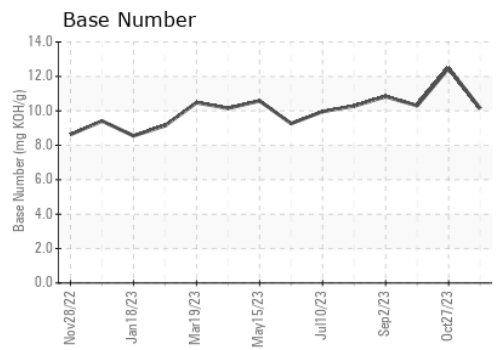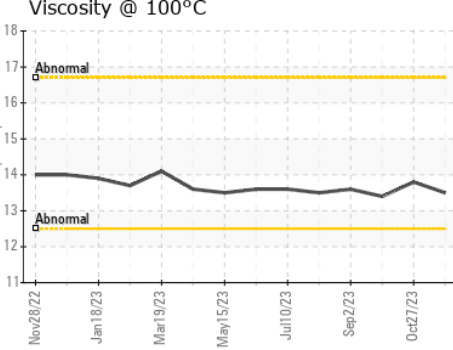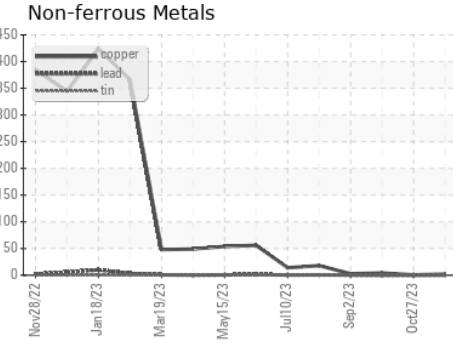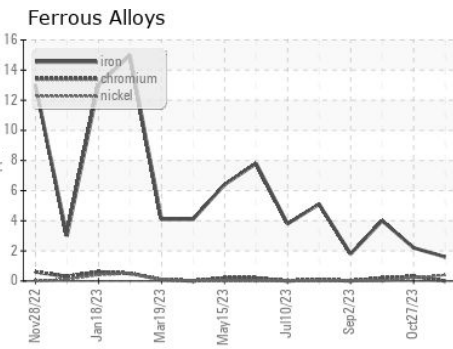

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0769034 **Received** : 06 Dec 2023  
**Lab Number** : 06026665 **Diagnosed** : 07 Dec 2023  
**Unique Number** : 10776456 **Diagnostician** : Sean Felton  
**Test Package** : IND 2

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)