




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

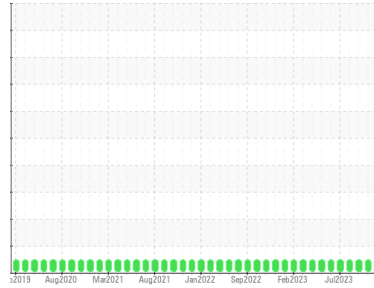

Area  
**Kentucky**  
 Machine Id  
**[Kentucky] Oil - Starboard Main Engine**  
 Component  
**Starboard Main Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Tyson Bias )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0845747</b>	WC0805480	WC0769068
Sample Date	Client Info		<b>28 Nov 2023</b>	30 Oct 2023	03 Oct 2023
Machine Age	hrs	Client Info	<b>11477</b>	10966	10432
Oil Age	hrs	Client Info	<b>1869</b>	1358	824
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>5</b>	5	4
Chromium	ppm	ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>1</b>	1	2
Lead	ppm	ASTM D5185m >18	<b>3</b>	2	1
Copper	ppm	ASTM D5185m >80	<b>2</b>	2	2
Tin	ppm	ASTM D5185m >14	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>29</b>	24	32
Barium	ppm	ASTM D5185m 10	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 100	<b>50</b>	48	53
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 450	<b>912</b>	756	765
Calcium	ppm	ASTM D5185m 3000	<b>1412</b>	1290	1427
Phosphorus	ppm	ASTM D5185m 1150	<b>1043</b>	920	1080
Zinc	ppm	ASTM D5185m 1350	<b>1310</b>	1161	1259
Sulfur	ppm	ASTM D5185m 4250	<b>2747</b>	3039	3828

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m >158	<b>3</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Water	%	ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	8.7	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.7</b>	21.3	21.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.5</b>	18.4	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.34</b>	10.02	10.55







# OIL ANALYSIS REPORT

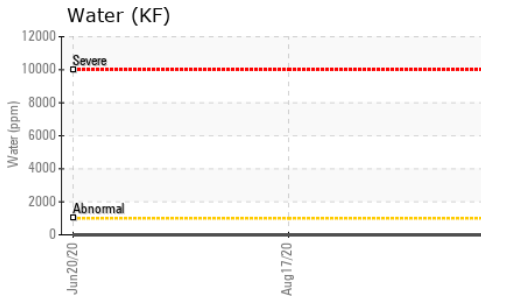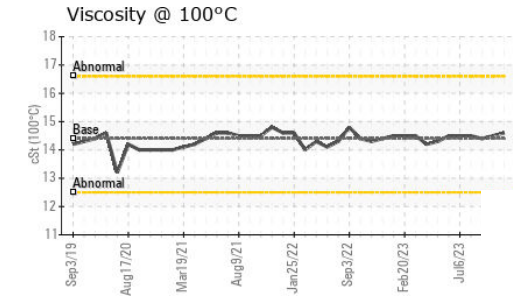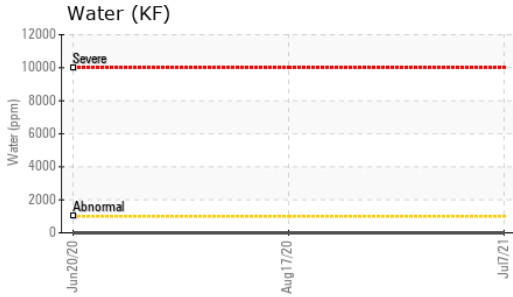

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.6</b>	14.5

## GRAPHS

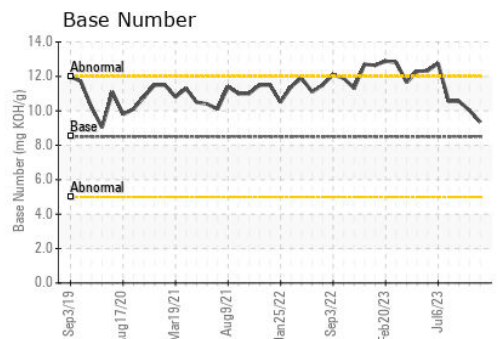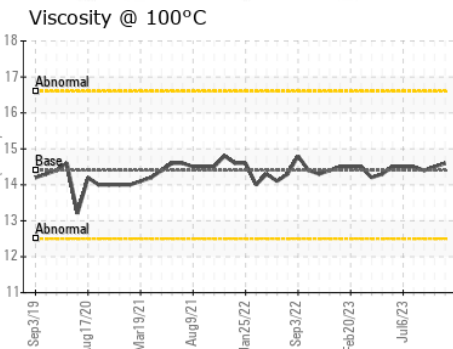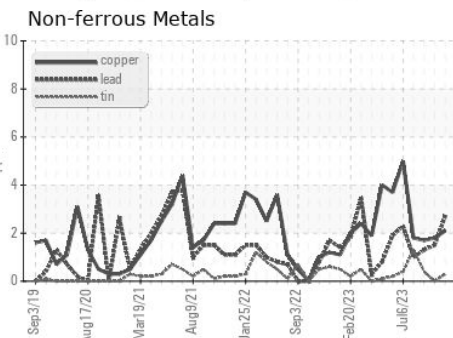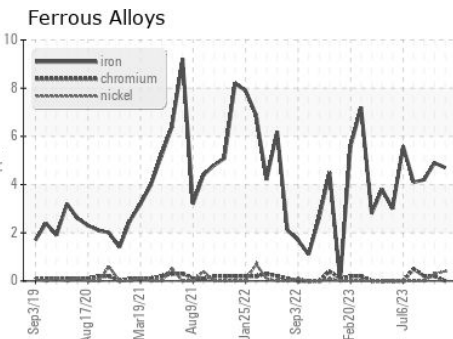

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0845747  
 Lab Number : **06026670**  
 Unique Number : 10776461  
 Test Package : IND 2 ( Additional Tests: KF )

Received : 06 Dec 2023  
 Diagnosed : 07 Dec 2023  
 Diagnostician : Sean Felton

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169

Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com

T: (606)585-3950

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)