




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**KANSAS/44/EG - TRUCK-ON-HWY-HEAVY DUTY**  
 Machine Id  
**07.44 [KANSAS^44^EG - TRUCK-ON-HWY-HEAVY DUTY]**  
 Component  
**Rear Differential**  
 Fluid  
**MOBIL DELVAC 1 SYNTHETIC GEAR SAE 75W90 (--- GAL)**

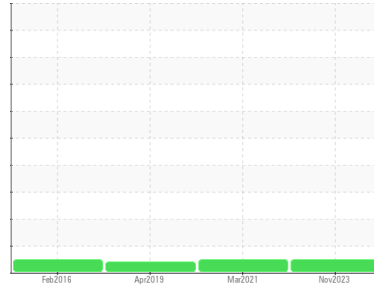

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0833763</b>	WC0543403	WC0339500
Sample Date	Client Info		<b>30 Nov 2023</b>	18 Mar 2021	19 Apr 2019
Machine Age	hrs	Client Info	<b>5615</b>	564	263
Oil Age	hrs	Client Info	<b>5051</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>21</b>	64	77
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	<1	4
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>323</b>	309	254
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	4	3
Magnesium	ppm	ASTM D5185m	<b>0</b>	1	0
Calcium	ppm	ASTM D5185m	<b>7</b>	62	21
Phosphorus	ppm	ASTM D5185m	<b>1385</b>	1331	1242
Zinc	ppm	ASTM D5185m	<b>4</b>	25	8
Sulfur	ppm	ASTM D5185m	<b>23394</b>	20306	20791

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>6</b>	10	7
Sodium	ppm	ASTM D5185m	<b>3</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>LIGHT</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



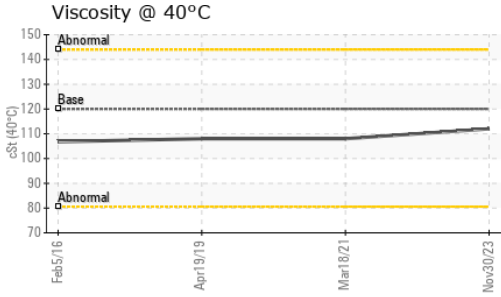


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	120	<b>112</b>	108	108

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

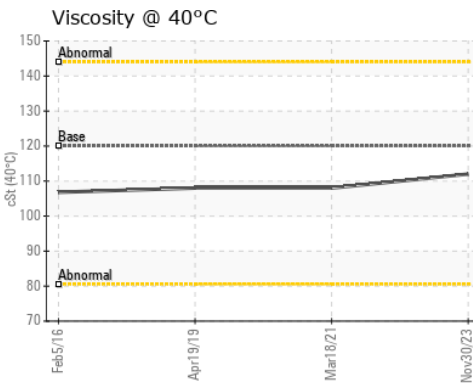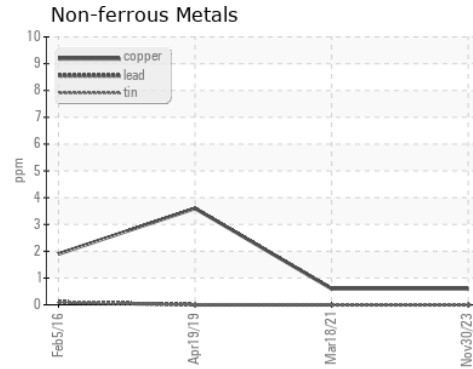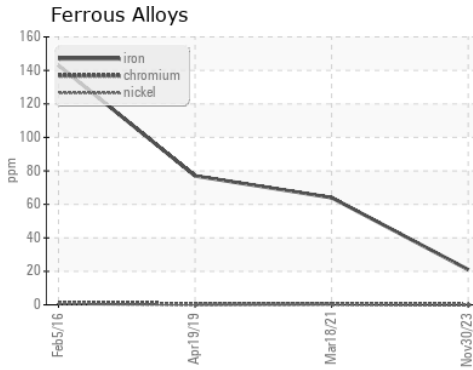

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0833763  
**Lab Number** : 06026794  
**Unique Number** : 10776585  
**Test Package** : CONST

**Received** : 06 Dec 2023  
**Diagnosed** : 08 Dec 2023  
**Diagnostician** : Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)