




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR 745D 13407 (S/N 3T606505)**  
 Component  
**Transmission (Manual)**  
 Fluid  
**TDTO FLUID SAE 30 (--- GAL)**

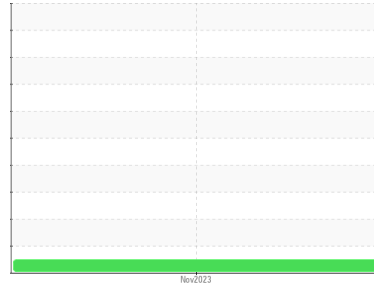

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0863012</b>	---	---
Sample Date	Client Info		<b>27 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>573</b>	---	---
Oil Age	hrs	Client Info	<b>573</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>13</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >7	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >45	<b>1</b>	---	---
Copper	ppm	ASTM D5185m >225	<b>11</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 37	<b>0</b>	---	---
Barium	ppm	ASTM D5185m 7	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 40	<b>7</b>	---	---
Calcium	ppm	ASTM D5185m 2650	<b>3098</b>	---	---
Phosphorus	ppm	ASTM D5185m 1050	<b>1042</b>	---	---
Zinc	ppm	ASTM D5185m 1075	<b>1233</b>	---	---
Sulfur	ppm	ASTM D5185m 5750	<b>8896</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>8</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---






# OIL ANALYSIS REPORT

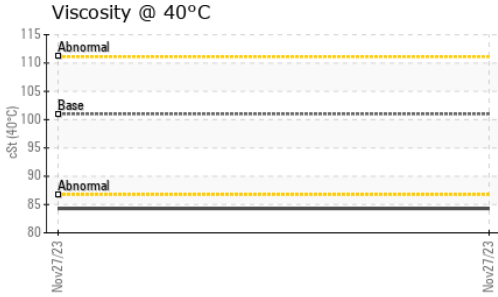

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 101	84.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

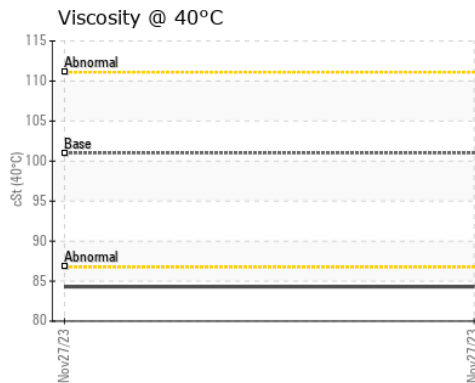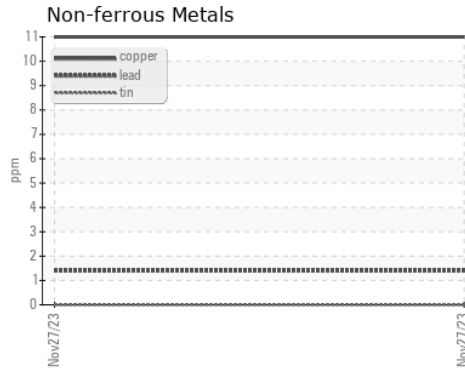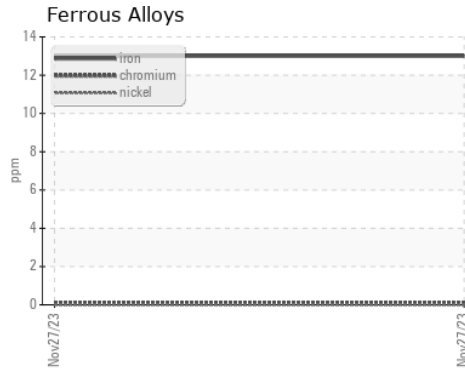

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0863012      **Received** : 06 Dec 2023  
**Lab Number** : 06026916      **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10776707      **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)