




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

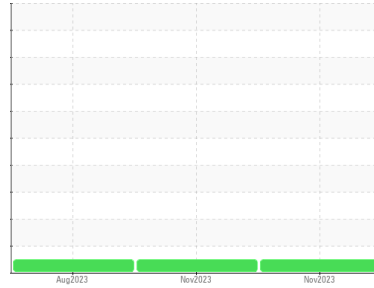

Area
Bernardsville
 Machine Id
ISUZU 3435
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T 15W40 (11)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0864847	WC0850678	WC0831068
Sample Date	Client Info			28 Nov 2023	04 Nov 2023	03 Aug 2023
Machine Age	hrs	Client Info		7288	47156	84392
Oil Age	hrs	Client Info		0	0	6589
Oil Changed	Client Info			Not Changed	Not Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	12	8	13
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	1	1	<1
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	316	17	21	8
Barium	ppm	ASTM D5185m	0.0	0	0	2
Molybdenum	ppm	ASTM D5185m	1.2	65	63	72
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	24	721	679	851
Calcium	ppm	ASTM D5185m	2292	1475	1377	1369
Phosphorus	ppm	ASTM D5185m	1064	1080	972	1089
Zinc	ppm	ASTM D5185m	1160	1273	1179	1288
Sulfur	ppm	ASTM D5185m	4996	3453	3257	3638



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	3
Sodium	ppm	ASTM D5185m		1	1	0
Potassium	ppm	ASTM D5185m	>20	<1	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	8.4	7.4	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	18.7	20.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	13.6	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	8.4	8.7	9.4











OIL ANALYSIS REPORT

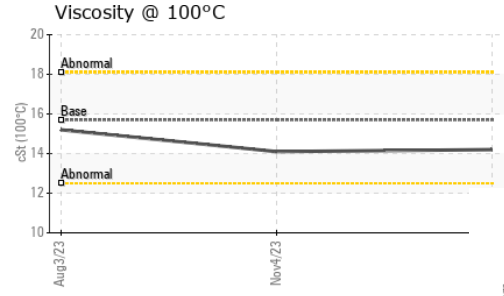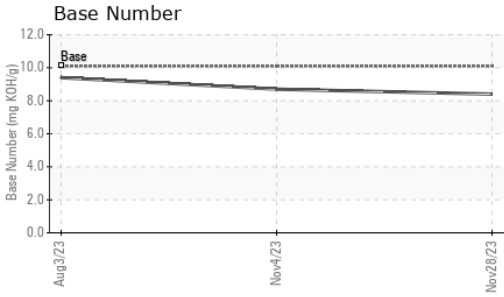

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	14.2	14.1	15.2

GRAPHS

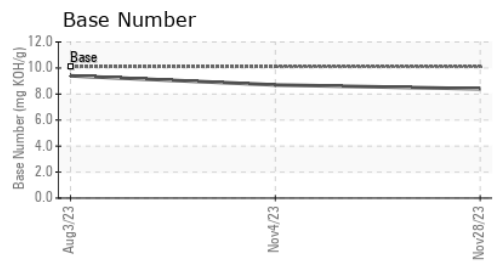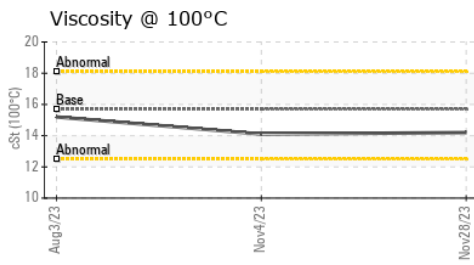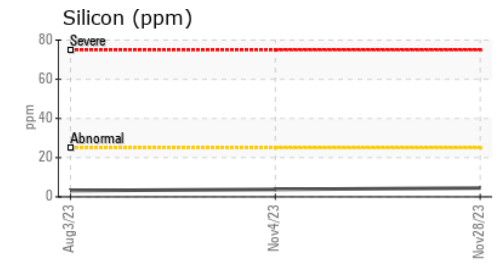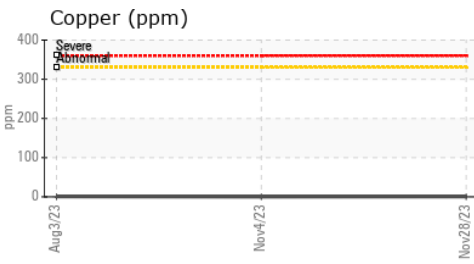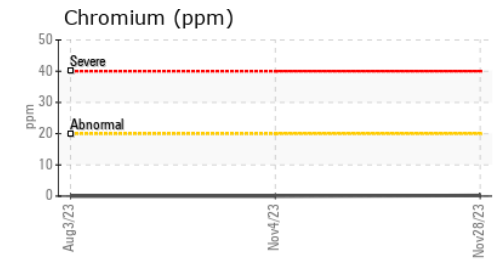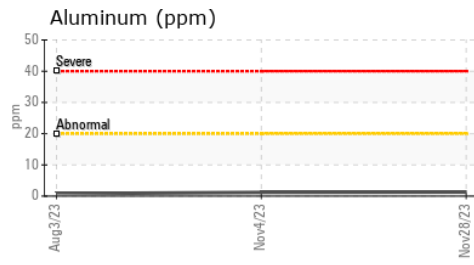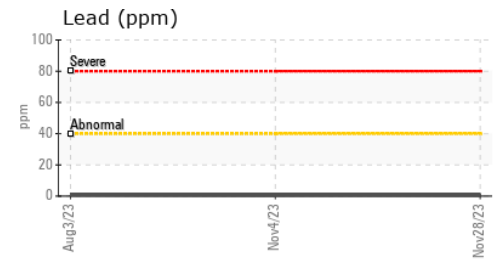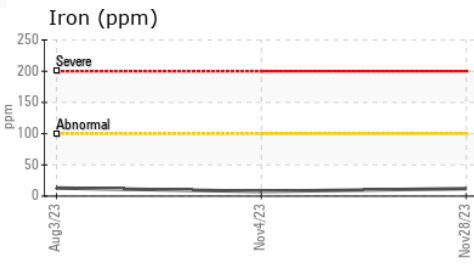

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864847 **Received** : 06 Dec 2023
Lab Number : 06027120 **Diagnosed** : 08 Dec 2023
Unique Number : 10776911 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-BERNARDSVILLE
 33 OLD QUARRY ROAD
 BERNARDSVILLE, NJ
 US 07924
 Contact: Pablo Chardon
 PChardon@interstatewaste.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)