




OIL ANALYSIS REPORT

Sample Rating Trend

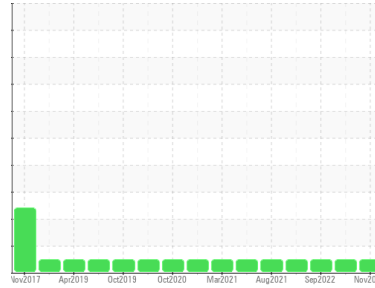

NORMAL



Machine Id
PETERBILT 6626

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0871020	WC0744195	WC0603396
Sample Date	Client Info		21 Nov 2023	28 Nov 2022	21 Sep 2022
Machine Age	hrs	Client Info	450	160087	157492
Oil Age	hrs	Client Info	450	450	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	40	6	10
Chromium	ppm	ASTM D5185m >20	2	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	3	1	2
Lead	ppm	ASTM D5185m >40	<1	1	2
Copper	ppm	ASTM D5185m >330	68	<1	2
Tin	ppm	ASTM D5185m >15	<1	0	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<1	14	7
Barium	ppm	ASTM D5185m 10	0	0	<1
Molybdenum	ppm	ASTM D5185m 100	53	61	61
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	796	926	907
Calcium	ppm	ASTM D5185m 3000	952	1133	1189
Phosphorus	ppm	ASTM D5185m 1150	943	1030	998
Zinc	ppm	ASTM D5185m 1350	1138	1199	1249
Sulfur	ppm	ASTM D5185m 4250	2643	3571	3221

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	4	5
Sodium	ppm	ASTM D5185m >158	10	2	0
Potassium	ppm	ASTM D5185m >20	3	0	3

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.2	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	7.2	11.6	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.5	23.4	22.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.1	19.1	17.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.0	8.8	9.4











OIL ANALYSIS REPORT

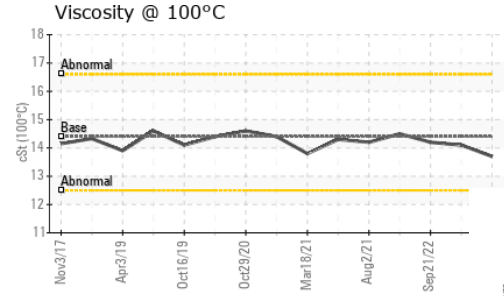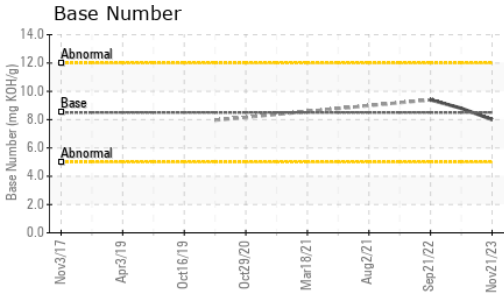

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	14.1	14.2

GRAPHS

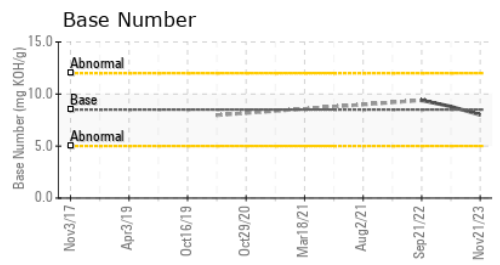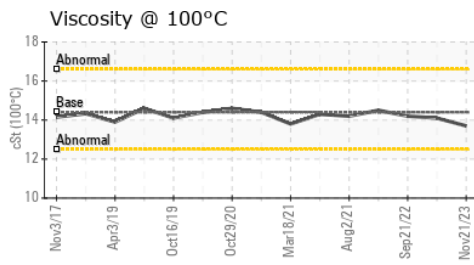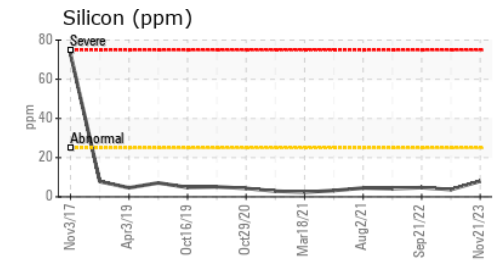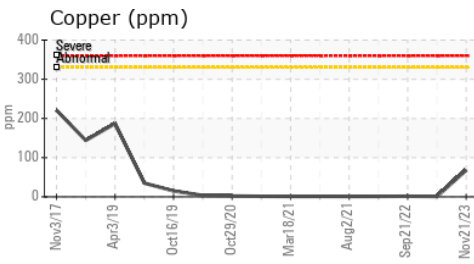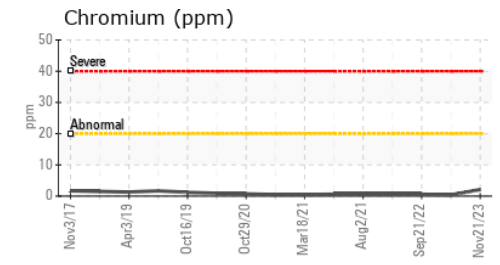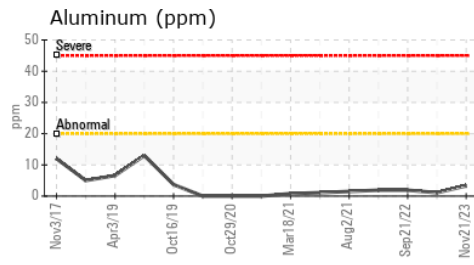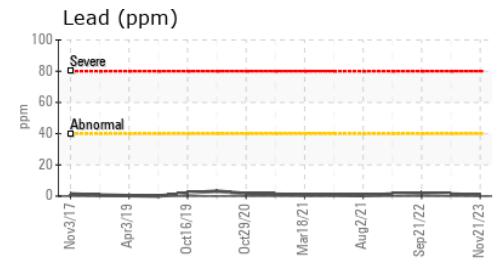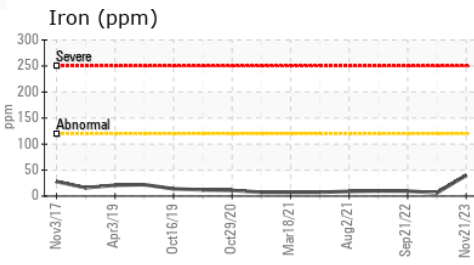

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0871020 **Received** : 07 Dec 2023
Lab Number : 06027293 **Diagnosed** : 08 Dec 2023
Unique Number : 10777084 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-CHESTER
 89 BLACK MEADOW RD
 CHESTER, NY
 US 10918
 Contact: ROB CLARKE
 rclarke@interstatewaste.com
 T:
 F: (845)572-3301

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)