



# OIL ANALYSIS REPORT


Sample Rating Trend

**NORMAL**



Area  
**ATP EQUIPMENT EXCHANGE**  
Machine Id  
**TOYOTA 42581**

Component  
**Propane Engine**  
Fluid  
**NOT GIVEN (--- GAL)**

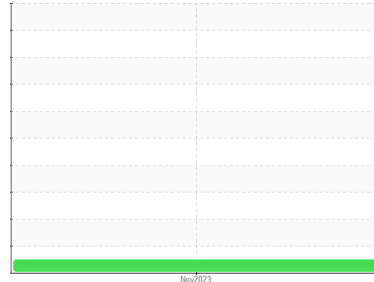

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0884784</b>	---	---
Sample Date	Client Info			<b>30 Nov 2023</b>	---	---
Machine Age	hrs	Client Info		<b>811</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>7</b>	---	---
Chromium	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>35	<b>33</b>	---	---
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>60</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>946</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1051</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1058</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1217</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3968</b>	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>3.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>12.9</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>5.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.1</b>	---	---








# OIL ANALYSIS REPORT

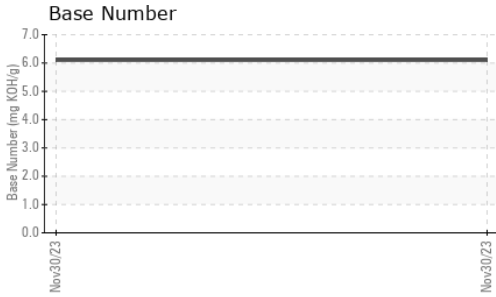

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>10.7</b>	---	---

## GRAPHS

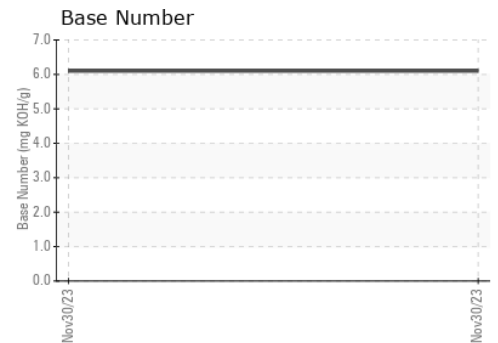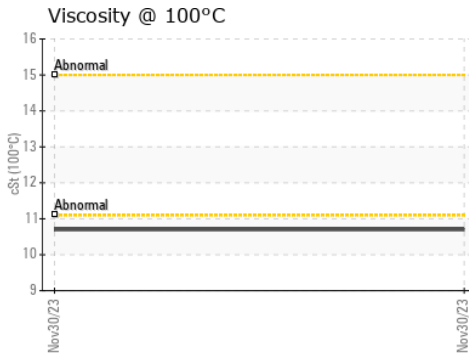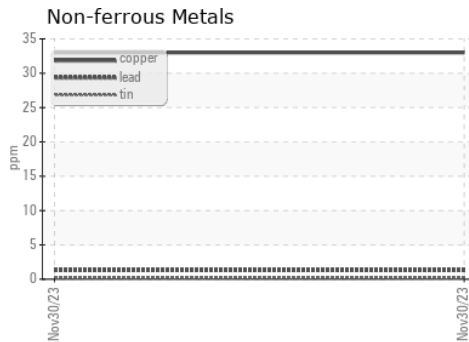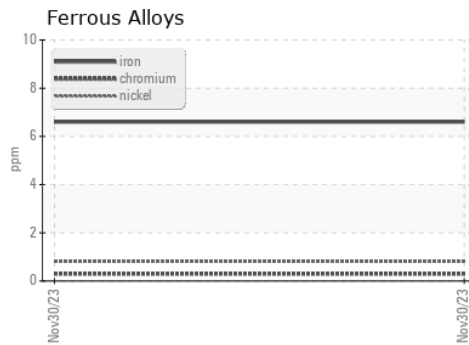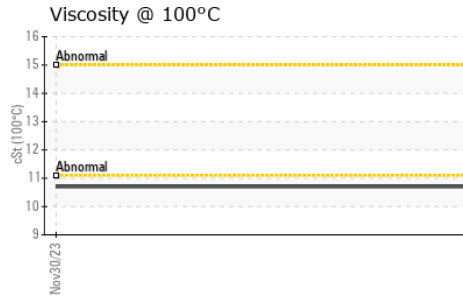

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0884784      **Received** : 07 Dec 2023  
**Lab Number** : **06027323**      **Diagnosed** : 11 Dec 2023  
**Unique Number** : 10777114      **Diagnostician** : Jonathan Hester  
**Test Package** : CONST ( Additional Tests: FUELDILUTION )

**FORKLIFT SELECT**  
 12875 E 42ND AVE, SUITE 50  
 DENVER, CO  
 US 80239  
 Contact: BYRON CHAPUIS  
 BYRON@FORKLIFTSELECT.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: