

# PROBLEM SUMMARY

Sample Rating Trend




**WEAR**



Machine Id  
**JOHN DEERE 648L 1DW648LBLKF695802**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Ferrous Alloys

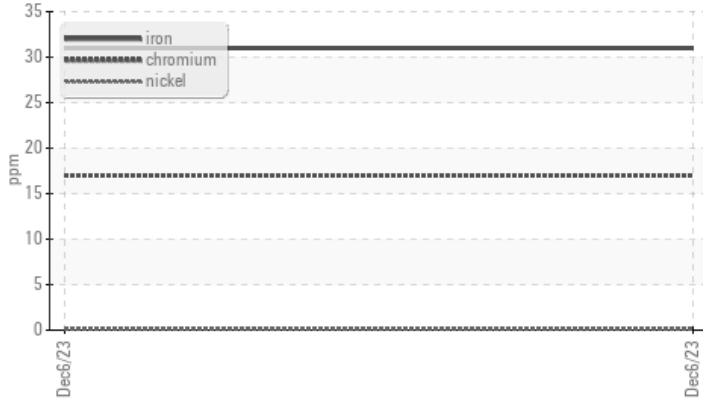

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL		---	---
Iron	ppm	ASTM D5185m >20	▲ 31	---
Chromium	ppm	ASTM D5185m >10	▲ 17	---

**Customer Id:** JAMMOUJR  
**Sample No.:** JR0177107  
**Lab Number:** 06027616  
**Test Package:** CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Machine Id  
**JOHN DEERE 648L 1DW648LBLKF695802**  
Component  
**Hydraulic System**  
Fluid  
**NOT GIVEN (--- GAL)**

**DIAGNOSIS**

**▲ Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**▲ Wear**

The iron level is abnormal. The chromium level is abnormal.

**Contamination**

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0177107</b>	---	---
Sample Date	Client Info		<b>06 Dec 2023</b>	---	---
Machine Age	hrs	Client Info	<b>7478</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---





WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>21</b>	---	---
Iron	ppm	ASTM D5185m >20	<b>▲ 31</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>▲ 17</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >75	<b>2</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m	<b>120</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>580</b>	---	---
Zinc	ppm	ASTM D5185m	<b>767</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>1565</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>4</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>2445</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>539</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>63</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>21</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>3</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>18/16/13</b>	---	---

# OIL ANALYSIS REPORT

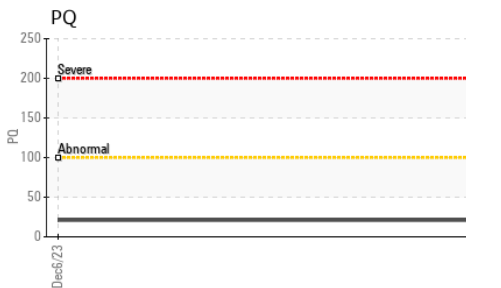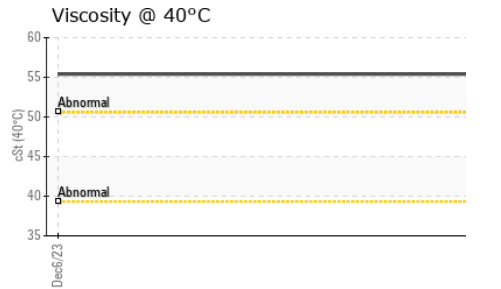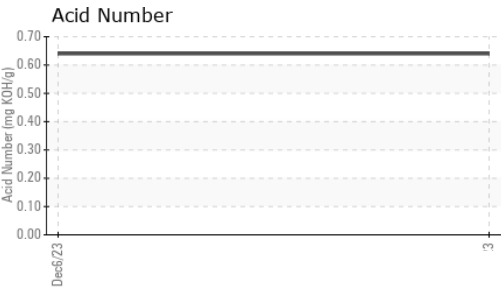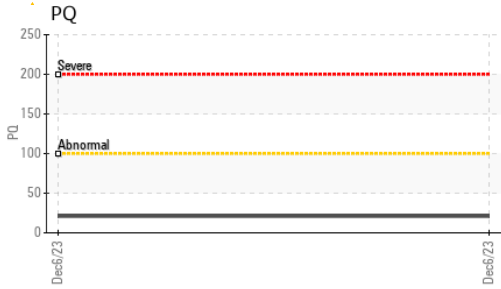



FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.64</b>	---	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>55.4</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

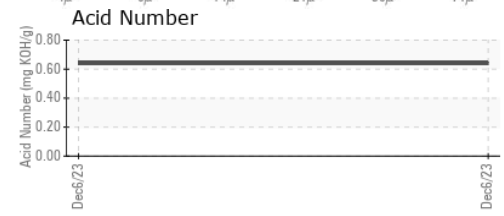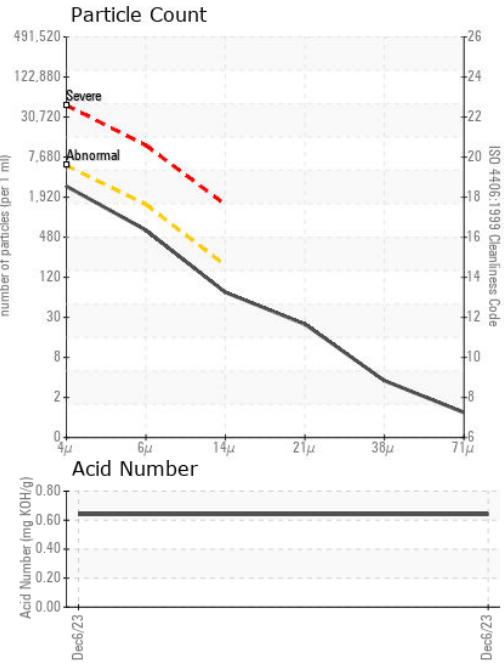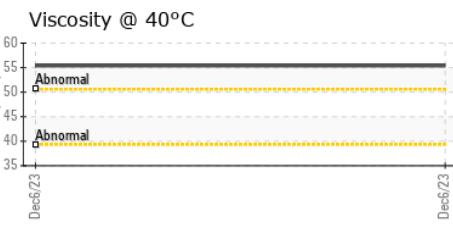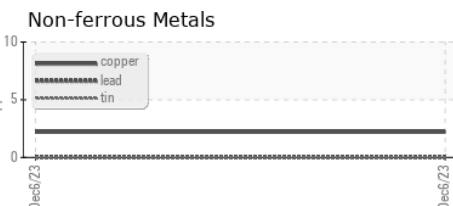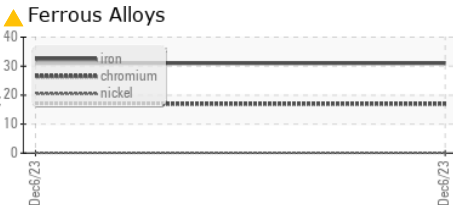

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0177107 **Received** : 07 Dec 2023  
**Lab Number** : 06027616 **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10777407 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MOUNT GILEAD**  
 305 NORTH MAIN STREET  
 MOUNT GILEAD, NC  
 US 27306  
 Contact: ADAM CRUMP  
 adam.crump@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)439-4568