

PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id
NB25621033 - NECESSITIES
Component
Compressor
Fluid
SYN DIESTER 68 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

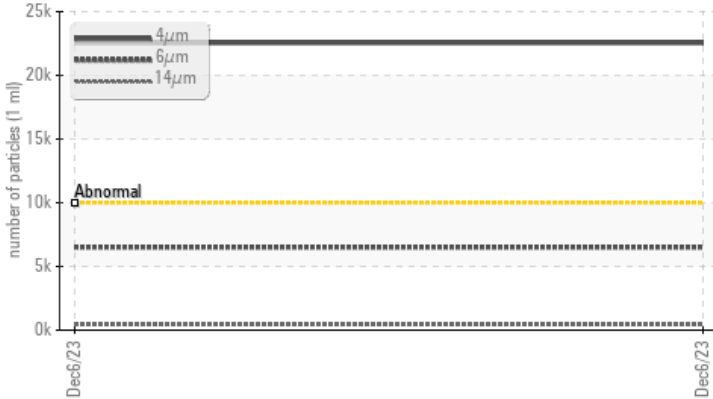

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	---	---
Particles >4µm	ASTM D7647	>10000	▲ 22542	---	---
Particles >6µm	ASTM D7647	>2500	▲ 6511	---	---
Particles >14µm	ASTM D7647	>320	▲ 429	---	---
Particles >21µm	ASTM D7647	>80	▲ 101	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 22/20/16	---	---

Customer Id: UCTULTUL
Sample No.: TO1000009
Lab Number: 06027710
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

Machine Id
NB25621033 - NECESSITIES
 Component
Compressor
 Fluid
SYN DIESTER 68 (--- GAL)



DIAGNOSIS

- Recommendation**
We recommend you service the filters on this component. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is a high amount of particulates present in the oil.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO1000009	---	---
Sample Date	Client Info	06 Dec 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	3	---	---
Chromium ppm ASTM D5185m	>10	<1	---	---
Nickel ppm ASTM D5185m		5	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>25	<1	---	---
Lead ppm ASTM D5185m	>25	0	---	---
Copper ppm ASTM D5185m	>50	2	---	---
Tin ppm ASTM D5185m	>15	0	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		<1	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m		10	---	---
Calcium ppm ASTM D5185m		1	---	---
Phosphorus ppm ASTM D5185m		200	---	---
Zinc ppm ASTM D5185m		1346	---	---
Sulfur ppm ASTM D5185m		1318	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	12	---	---
Sodium ppm ASTM D5185m		<1	---	---
Potassium ppm ASTM D5185m	>20	<1	---	---
Water % ASTM D6304	>0.1	0.016	---	---
ppm Water ppm ASTM D6304	>1000	162	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>10000	▲ 22542	---	---
Particles >6µm ASTM D7647	>2500	▲ 6511	---	---
Particles >14µm ASTM D7647	>320	▲ 429	---	---
Particles >21µm ASTM D7647	>80	▲ 101	---	---
Particles >38µm ASTM D7647	>20	3	---	---
Particles >71µm ASTM D7647	>4	0	---	---
Oil Cleanliness ISO 4406 (c)	>20/18/15	▲ 22/20/16	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		1.90	---	---

OIL ANALYSIS REPORT

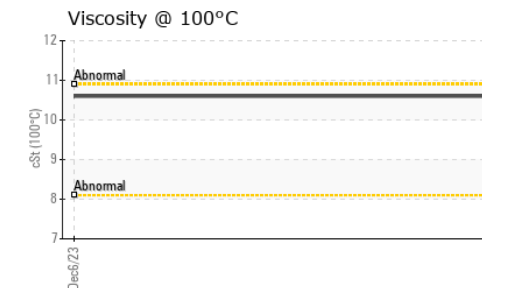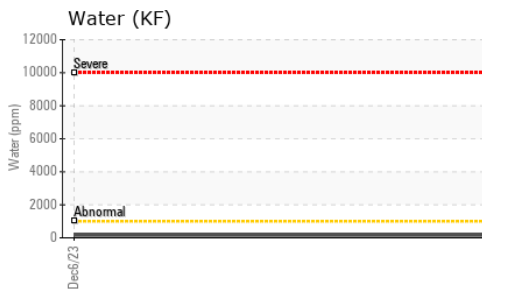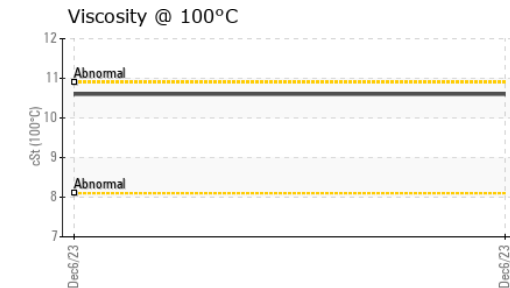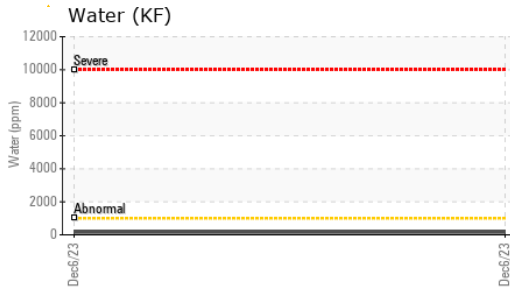
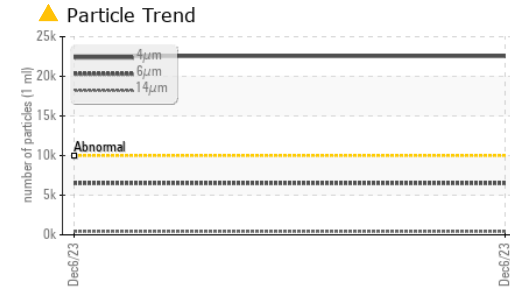


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	66.6	---	---
Visc @ 100°C	cSt	ASTM D445	10.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270	148	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

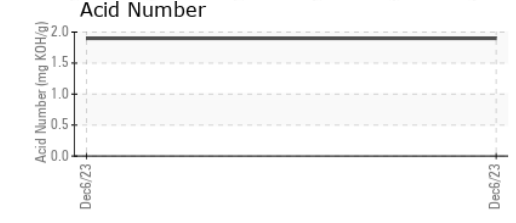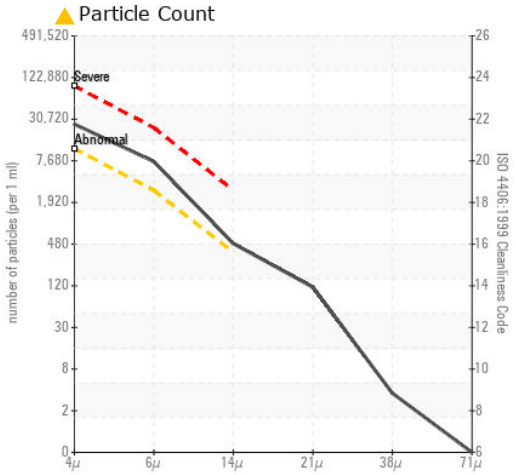

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO1000009 **Received** : 07 Dec 2023
Lab Number : 06027710 **Diagnosed** : 08 Dec 2023
Unique Number : 10777501 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

TULCO OILS INC (001-TULSA DIVISION)
 5240 EAST PINE
 TULSA, OK
 US 74115
 Contact: DYLAN COPE
 dylancope@tulco.com
 T: (800)375-2347
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)