



PROBLEM SUMMARY


Area
WOOD SUPPLY
 Machine Id
AF01-3031 PB TRUCK DUMP HYD UNIT
 Component
Hydraulic System
 Fluid
HYPAR 68 (300 GAL)

Sample Rating Trend



COMPONENT CONDITION SUMMARY

▲ Particle Trend

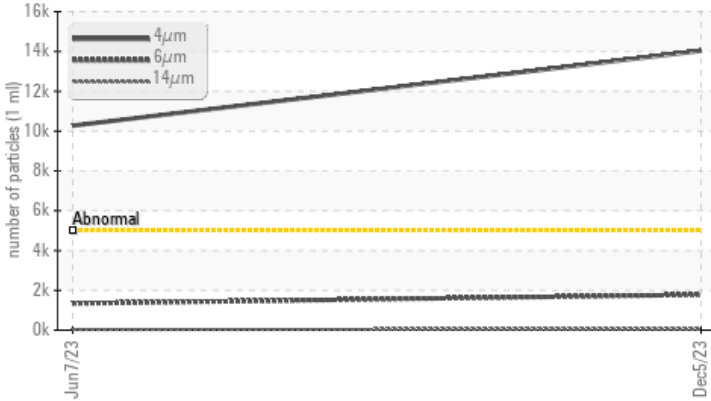

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 14036	▲ 10274	---
Particles >6µm	ASTM D7647	>1300	▲ 1777	▲ 1340	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/18/13	▲ 21/18/12	---

Customer Id: FLAMONNC
 Sample No.: WC0842385
 Lab Number: 06027722
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

07 Jun 2023 Diag: Wes Davis

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

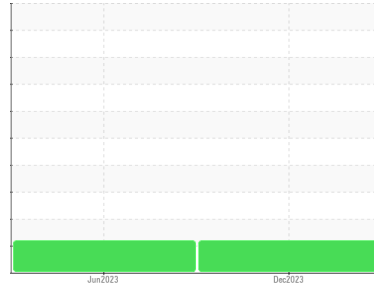

ISO



Area
WOOD SUPPLY
 Machine Id
AF01-3031 PB TRUCK DUMP HYD UNIT
 Component
Hydraulic System
 Fluid
HYPAR 68 (300 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0842385	WC0761383	---
Sample Date	Client Info		05 Dec 2023	07 Jun 2023	---
Machine Age	Client Info		0	0	---
Oil Age	Client Info		0	0	---
Oil Changed	Client Info		Not Changed	Not Changed	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		11	12	---
Iron	ppm ASTM D5185m	>20	7	8	---
Chromium	ppm ASTM D5185m	>20	<1	0	---
Nickel	ppm ASTM D5185m	>20	0	0	---
Titanium	ppm ASTM D5185m		<1	<1	---
Silver	ppm ASTM D5185m		0	0	---
Aluminum	ppm ASTM D5185m	>20	2	<1	---
Lead	ppm ASTM D5185m	>20	0	0	---
Copper	ppm ASTM D5185m	>20	3	3	---
Tin	ppm ASTM D5185m	>20	0	3	---
Vanadium	ppm ASTM D5185m		0	<1	---
Cadmium	ppm ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		0	0	---
Barium	ppm ASTM D5185m		5	0	---
Molybdenum	ppm ASTM D5185m		<1	0	---
Manganese	ppm ASTM D5185m		0	<1	---
Magnesium	ppm ASTM D5185m		<1	2	---
Calcium	ppm ASTM D5185m		1	2	---
Phosphorus	ppm ASTM D5185m		527	523	---
Zinc	ppm ASTM D5185m		8	16	---
Sulfur	ppm ASTM D5185m		1894	1935	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>15	1	1	---
Sodium	ppm ASTM D5185m		0	<1	---
Potassium	ppm ASTM D5185m	>20	1	0	---
Water	% ASTM D6304	>0.05	0.005	0.009	---
ppm Water	ppm ASTM D6304	>500	57	90.7	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 14036	▲ 10274	---
Particles >6µm	ASTM D7647	>1300	▲ 1777	▲ 1340	---
Particles >14µm	ASTM D7647	>160	48	29	---
Particles >21µm	ASTM D7647	>40	11	7	---
Particles >38µm	ASTM D7647	>10	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/18/13	▲ 21/18/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045		0.13	0.18	---




OIL ANALYSIS REPORT

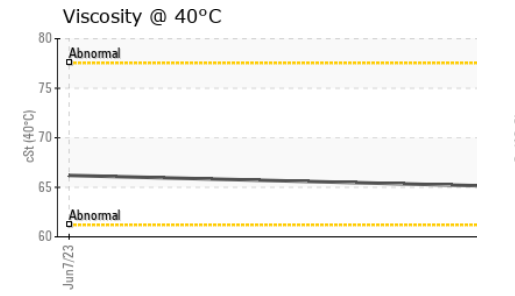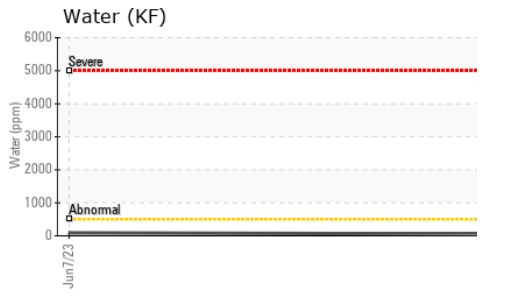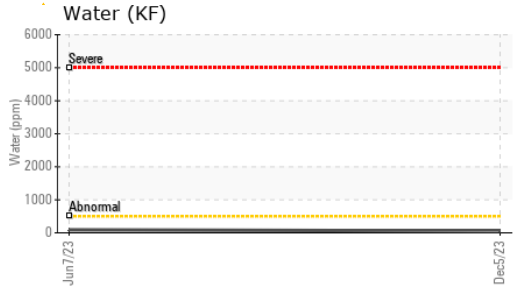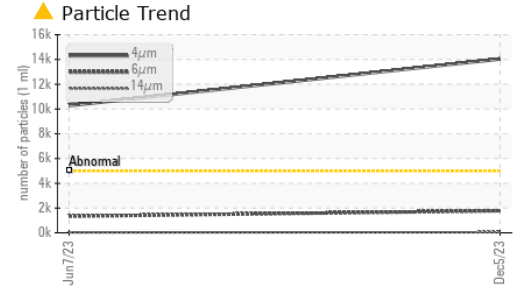





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.1	66.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

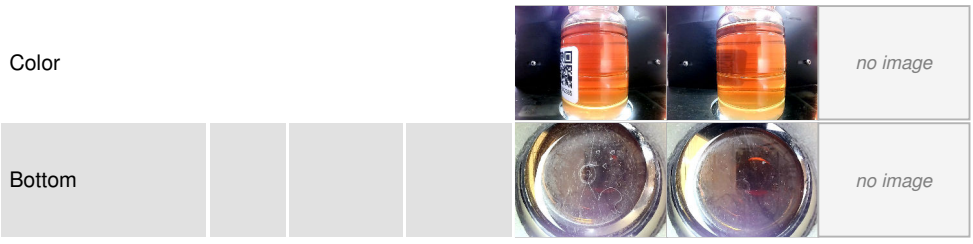

GRAPHS

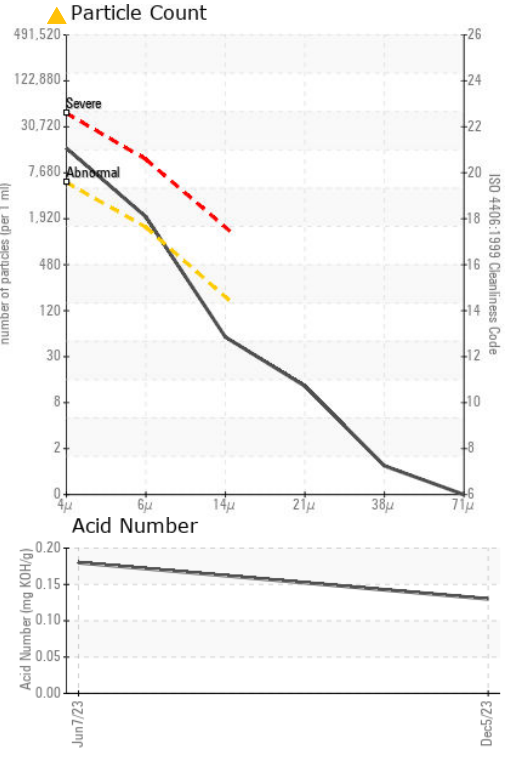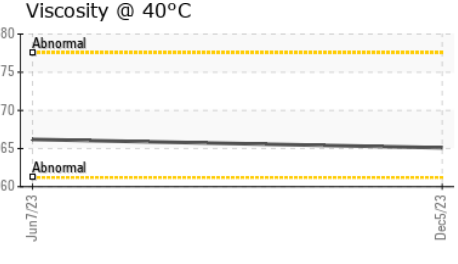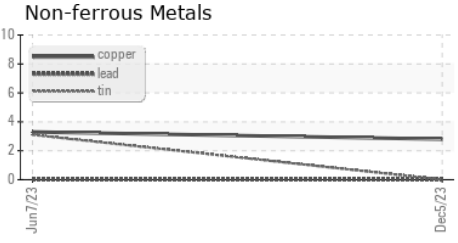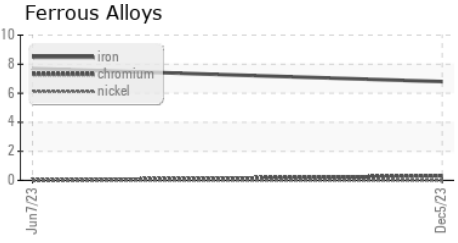

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0842385 **Received** : 07 Dec 2023
Lab Number : 06027722 **Diagnosed** : 08 Dec 2023
Unique Number : 10777513 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KF, PQ)

ARAUCO FLAKEBOARD - MDF
 985 CORINTH RD
 MONCURE, NC
 US
 Contact: CHRISTOPHER JACKSON
 christopher.jackson@arauco.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)