




PROBLEM SUMMARY



Machine Id
CATERPILLAR D10T 15105049 (S/N CATOD10TCRJG01495)
 Component
Diesel Engine
 Fluid
ROYAL PURPLE MOTOR OIL 15W40 (--- GAL)

Sample Rating Trend

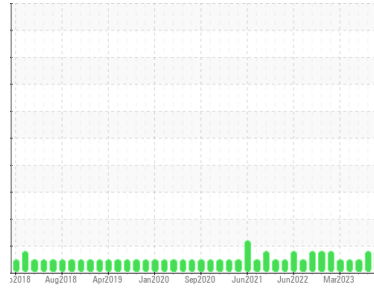


WEAR



COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

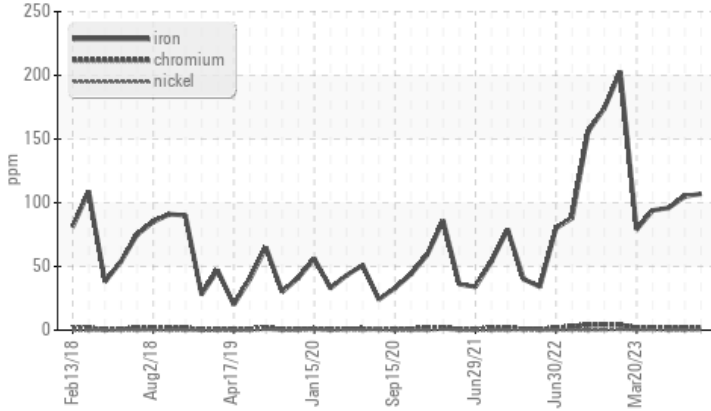

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>100	▲ 107	▲ 105	96

Customer Id: NRGJEW
 Sample No.: RP0036213
 Lab Number: 06027966
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

31 Oct 2023 Diag: Sean Felton

WEAR



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Cylinder, crank, or cam shaft wear is indicated. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



13 Sep 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



02 Aug 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT



Machine Id
CATERPILLAR D10T 15105049 (S/N CATOD10TCRJG01495)
 Component
Diesel Engine
 Fluid
ROYAL PURPLE MOTOR OIL 15W40 (--- GAL)

Sample Rating Trend

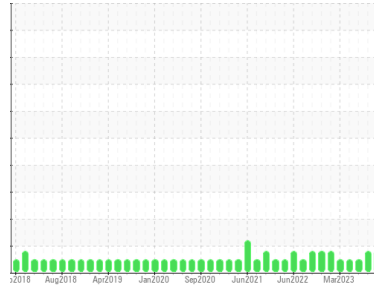

WEAR



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0036213	RP0036188	RP0033747
Sample Date	Client Info		30 Nov 2023	31 Oct 2023	13 Sep 2023
Machine Age	hrs	Client Info	25419	25193	24938
Oil Age	hrs	Client Info	1217	991	736
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 107	▲ 105	96
Chromium	ppm	ASTM D5185m >20	2	2	2
Nickel	ppm	ASTM D5185m >2	<1	0	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	2	4
Lead	ppm	ASTM D5185m >40	2	4	3
Copper	ppm	ASTM D5185m >330	119	96	78
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	0	3
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 100	94	90	95
Manganese	ppm	ASTM D5185m	2	1	2
Magnesium	ppm	ASTM D5185m 60	24	18	23
Calcium	ppm	ASTM D5185m 3050	3001	2882	3169
Phosphorus	ppm	ASTM D5185m 1050	1009	929	984
Zinc	ppm	ASTM D5185m 1200	1187	1147	1112

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	6	6
Sodium	ppm	ASTM D5185m	3	2	5
Potassium	ppm	ASTM D5185m >20	2	1	<1
Water	%	ASTM D6304 >0.2	NEG	NEG	NEG





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.1	1.1	0.9
Nitration	Abs/cm	*ASTM D7624 >20	8.4	8.5	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	28.4	28.5	26.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.8	18.1	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	8.14	9.26	8.79





OIL ANALYSIS REPORT

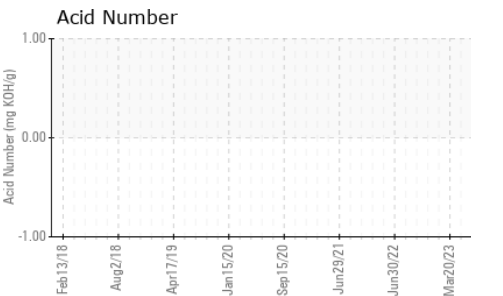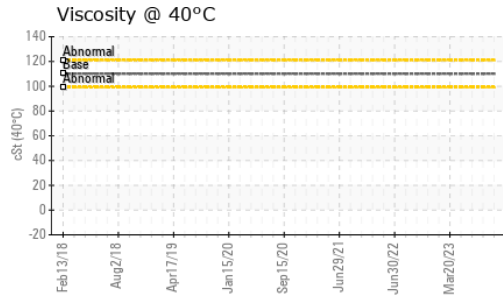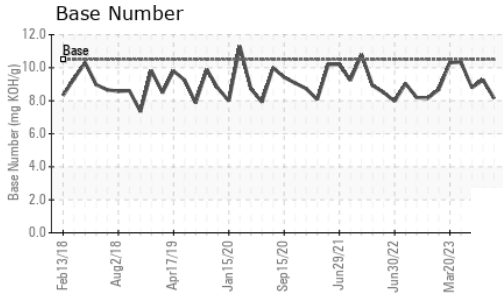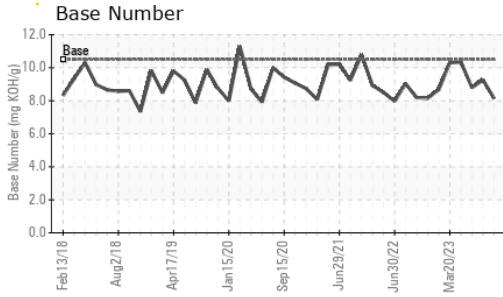

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	12.9	12.9

GRAPHS

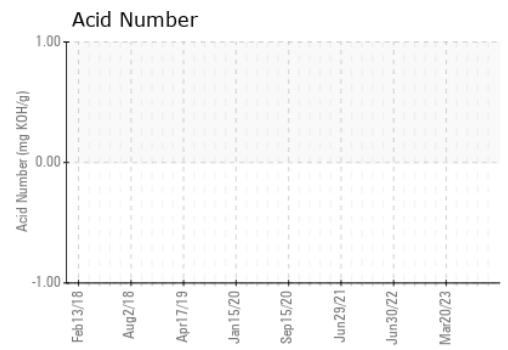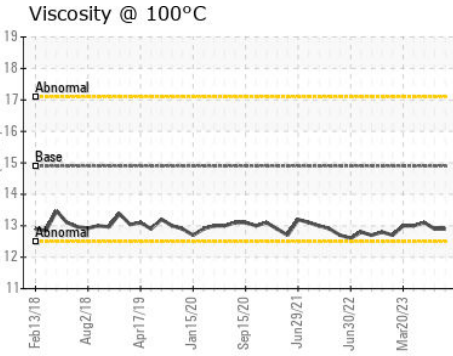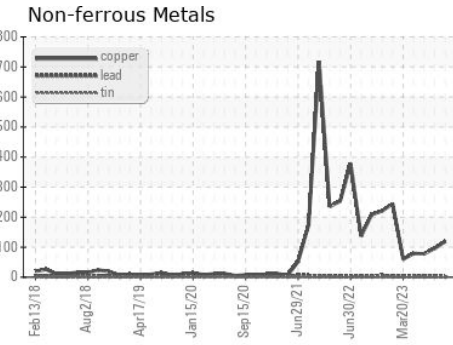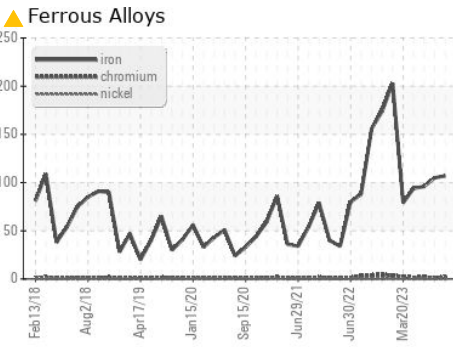

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0036213 **Received** : 07 Dec 2023
Lab Number : **06027966** **Diagnosed** : 10 Dec 2023
Unique Number : 10777757 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: FT-IR, KV100, TBN)

NRG TEXAS LLC
 3784 FM 39 SOUTH
 JEWETT, TX
 US 75846
 Contact: JURGEN THOMPSON
 JThompson@ecomaterial.com
 T: (903)626-9528
 F: (903)626-9772

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)