




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR D10T 15105050 (S/N CATOD10TCRJG01497)**  
 Component  
**Diesel Engine**  
 Fluid  
**ROYAL PURPLE MOTOR OIL 15W40 (--- GAL)**

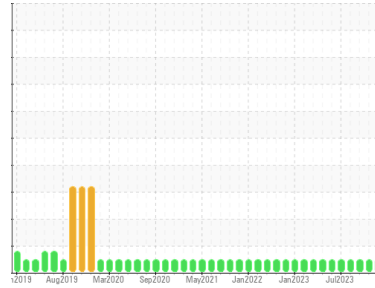

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0036208</b>	RP0033487	RP0033737
Sample Date	Client Info		<b>20 Nov 2023</b>	24 Oct 2023	21 Sep 2023
Machine Age	hrs	Client Info	<b>76064</b>	75707	75411
Oil Age	hrs	Client Info	<b>653</b>	296	1903
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>28</b>	18	59
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>3</b>	3	9
Copper	ppm	ASTM D5185m >330	<b>14</b>	12	55
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 100	<b>101</b>	98	131
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 60	<b>24</b>	22	17
Calcium	ppm	ASTM D5185m 3050	<b>3169</b>	2864	2902
Phosphorus	ppm	ASTM D5185m 1050	<b>1108</b>	919	1079
Zinc	ppm	ASTM D5185m 1200	<b>1315</b>	1196	1277

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	6
Sodium	ppm	ASTM D5185m	<b>3</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Water	%	ASTM D6304 >0.2	<b>NEG</b>	NEG	NEG






## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.7	1.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	6.6	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>27.6</b>	26.1	28.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.4</b>	16.5	16.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	<b>9.67</b>	10.16	7.08





# OIL ANALYSIS REPORT

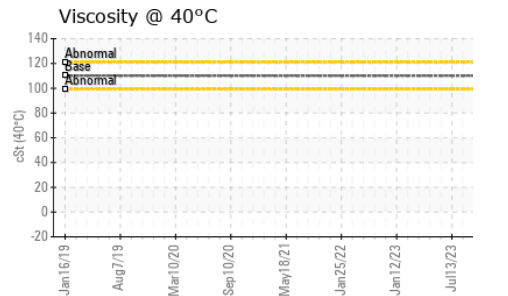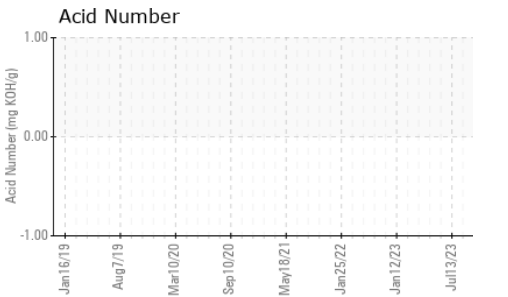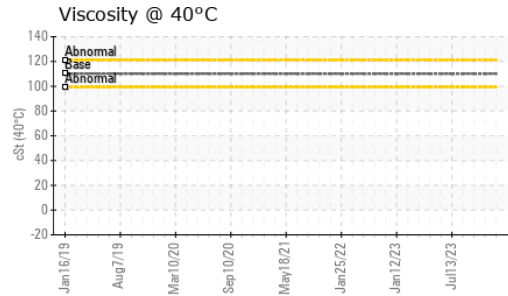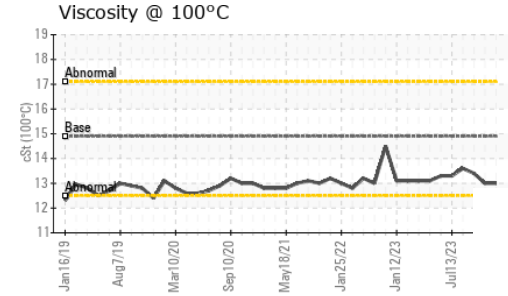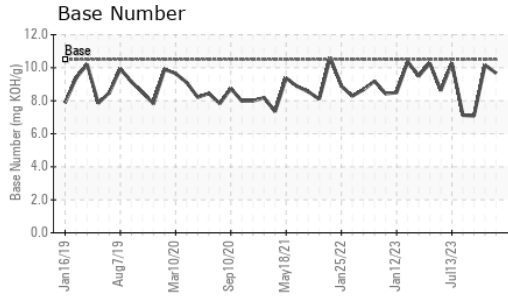

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	<b>13.0</b>	13.0

## GRAPHS

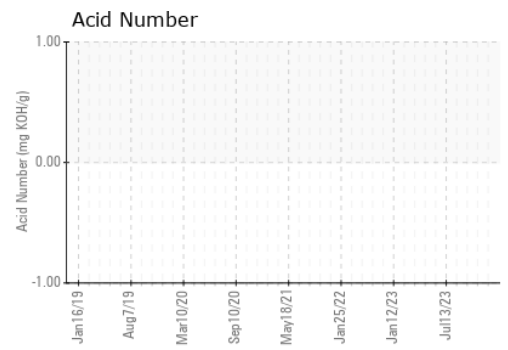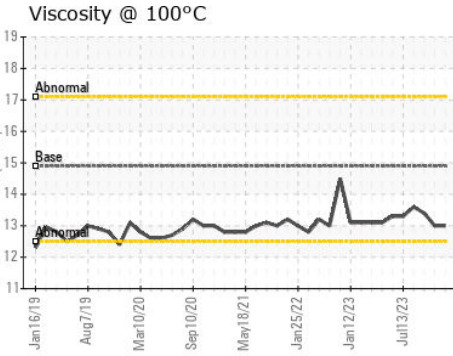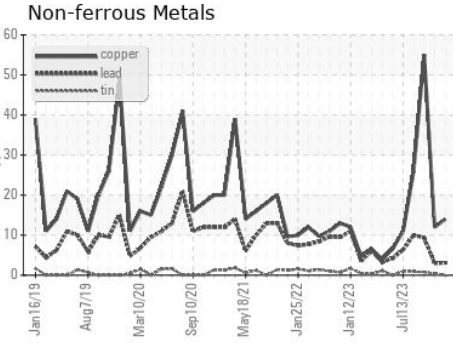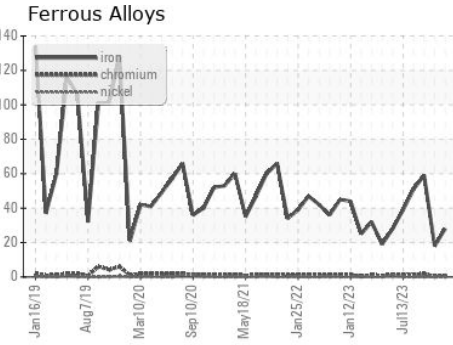

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0036208 **Received** : 07 Dec 2023  
**Lab Number** : **06027967** **Diagnosed** : 10 Dec 2023  
**Unique Number** : 10777758 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KV100, TBN )

**NRG TEXAS LLC**  
 3784 FM 39 SOUTH  
 JEWETT, TX  
 US 75846  
 Contact: JURGEN THOMPSON  
 JThompson@ecomaterial.com  
 T: (903)626-9528  
 F: (903)626-9772

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)