




OIL ANALYSIS REPORT

Sample Rating Trend

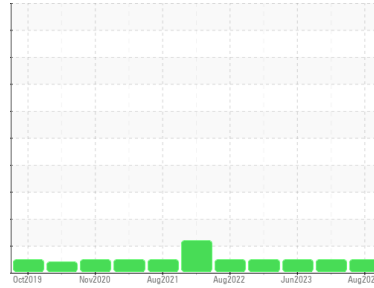

NORMAL



Area
5C07
 Machine Id
PETERBILT 220 TTK6362 (S/N 3BPPHM6X5KF592714)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (19 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ARI0007354	ARI0006722	ARI0006798
Sample Date	Client Info		29 Aug 2023	25 Jun 2023	02 Jun 2023
Machine Age	mls	Client Info	56420	56420	52012
Oil Age	mls	Client Info	0	4408	4996
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	19	30	17
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	2	6	0
Lead	ppm	ASTM D5185m >40	0	0	1
Copper	ppm	ASTM D5185m >330	<1	1	1
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<1	1	3
Barium	ppm	ASTM D5185m 10	3	0	4
Molybdenum	ppm	ASTM D5185m 100	61	80	61
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 450	902	1274	1025
Calcium	ppm	ASTM D5185m 3000	1006	1327	1129
Phosphorus	ppm	ASTM D5185m 1150	1004	1320	1085
Zinc	ppm	ASTM D5185m 1350	1180	1665	1318
Sulfur	ppm	ASTM D5185m 4250	3212	4255	3793

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	5	3
Sodium	ppm	ASTM D5185m >158	0	3	2
Potassium	ppm	ASTM D5185m >20	3	5	3

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.7	8.7	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.3	19.2	18.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.1	16.1	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.8	9.0	9.2







OIL ANALYSIS REPORT

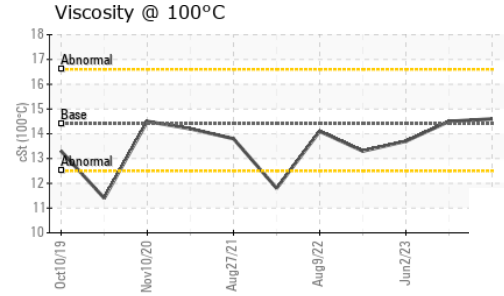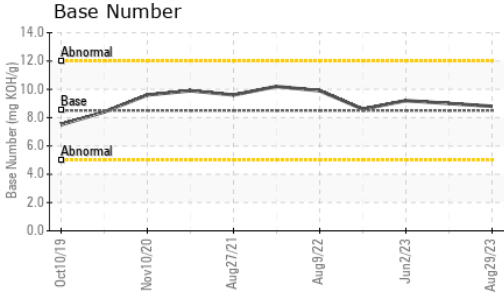

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.6	14.5	13.7

GRAPHS

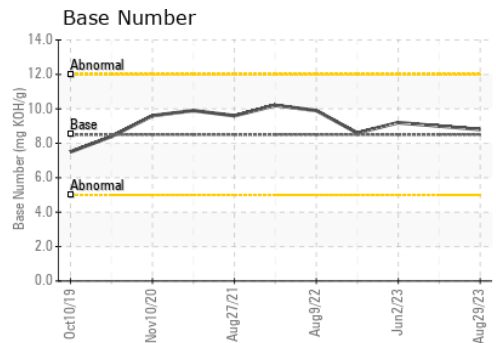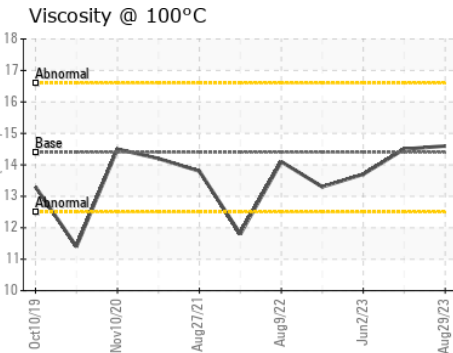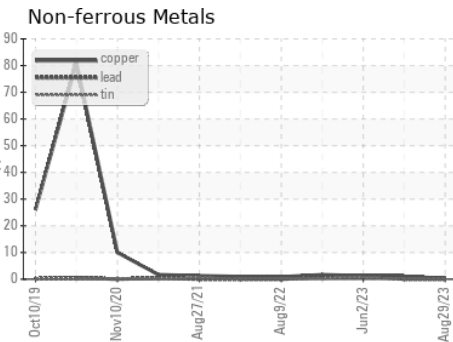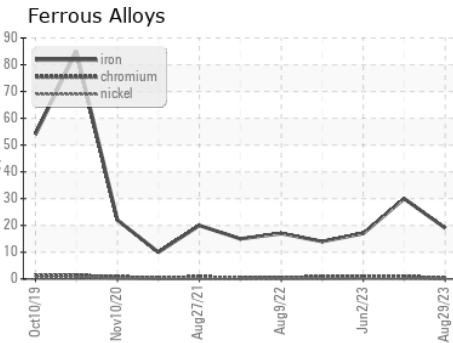

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ARI0007354 **Received** : 07 Dec 2023
Lab Number : **06028473** **Diagnosed** : 09 Dec 2023
Unique Number : 10778264 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

INSITUFORM TECHNOLOGIES, INC
 253F WORCESTER ROAD
 CHARLTON, MA
 US 01507
 Contact: NELSON LEITE
 NLEITE@INSITUFORM.COM
 T: (774)364-1927
 F: (508)248-1709

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)