


# **OIL ANALYSIS REPORT**

# GUAY SON [CONHER] PISA 4 SH - Pacifico Industrial

Component **Hydraulic System** 

ISO 68 (1000 LTR)





# DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. (after 6 hours of Kleenoil filtration). ( Customer Sample Comment: Before filtration )

All component wear rates are normal.

## Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Nov2023 Nov2023 Nov2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KL0013435	KL0013436	KL0013437
Sample Date		Client Info		30 Nov 2023	30 Nov 2023	30 Nov 2023
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		24	24	24
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	8	2	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	4	4	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		3	1	3
Calcium	ppm	ASTM D5185m		19	19	19
Phosphorus	ppm	ASTM D5185m		319	320	316
Zinc	ppm	ASTM D5185m		370	362	363
Sulfur	ppm	ASTM D5185m		1480	1488	1471
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	1	1	1
Sodium	ppm	ASTM D5185m		12	5	7
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water	%	ASTM D6304	>0.1	0.079		
ppm Water	ppm	ASTM D6304	>1000	790		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		76713	39053	52188
Particles >6μm		ASTM D7647	>1300	1299	<u>▲</u> 2382	<u>▲</u> 3263
Particles >14μm		ASTM D7647	>160	10	18	22
Particles >21μm		ASTM D7647	>40	3	4	5
Particles >38μm		ASTM D7647	>10	0	0	0
Particles >71μm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/14	17/10	<u> </u>	▲ 19/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.27	0.28	0.27



# **OIL ANALYSIS REPORT**

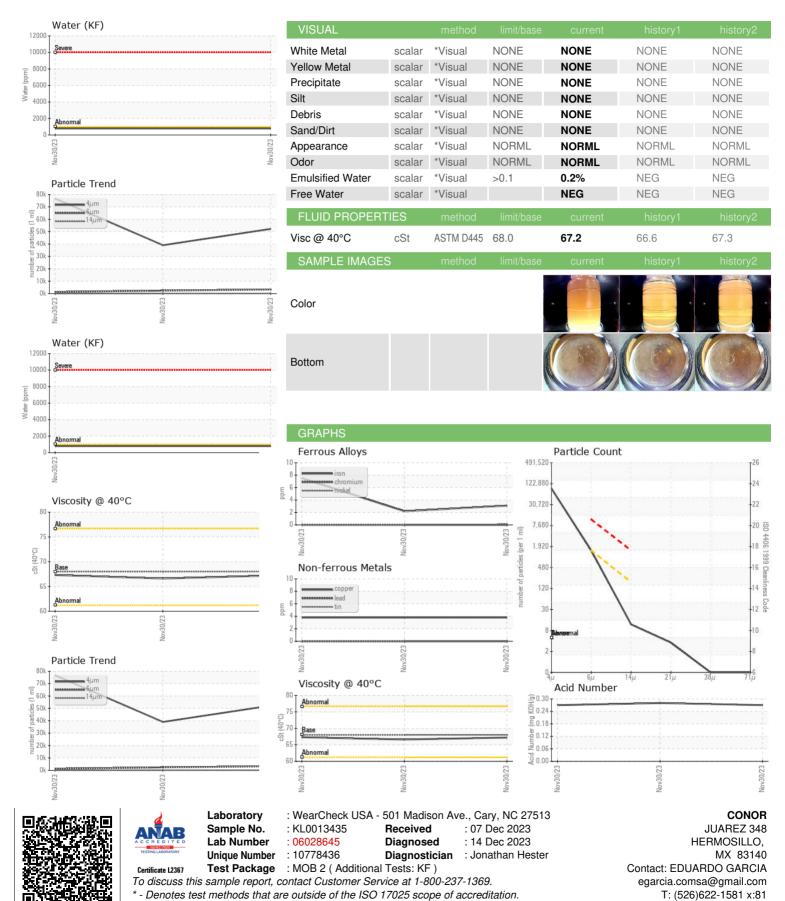

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (526)622-1581 x:81

F: x: