


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id **5 (S/N 7684924)**

Hydraulic System

NOT GIVEN (--- GAL)

Ν		

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 10W AW Hydraulic Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jun2021	Nov2023		
SAMPLE INFORM	/ATION	method	limit/base	current	history1	history2
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Client Info	mmobacc	PTK0004819	PTK0002431	
Sample Number		Client Info		29 Nov 2023	24 Jun 2021	
Sample Date	hue					
Machine Age Oil Age	hrs hrs	Client Info		0	0	
Oil Changed	1115	Client Info		N/A	Changed	
Sample Status		Ciletit IIIIO		NORMAL	NORMAL	
•				-		
CONTAMINATION	V	method	limit/base		history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	10	6	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	<1	<1	
Tin	ppm	ASTM D5185m	>10	0	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		6	0	
Calcium	ppm	ASTM D5185m		9	3	
Phosphorus	ppm	ASTM D5185m		248	216	
Zinc	ppm	ASTM D5185m		151	138	
Sulfur	ppm	ASTM D5185m		706	302	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	2	
Sodium	ppm	ASTM D5185m		2	0	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		912	1027	
Particles >6µm		ASTM D7647	>2500	230	157	
Particles >14μm		ASTM D7647	>320	21	10	
Particles >21µm		ASTM D7647	>80	6	4	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71μm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>18/15	15/12	17/14/10	



OIL ANALYSIS REPORT

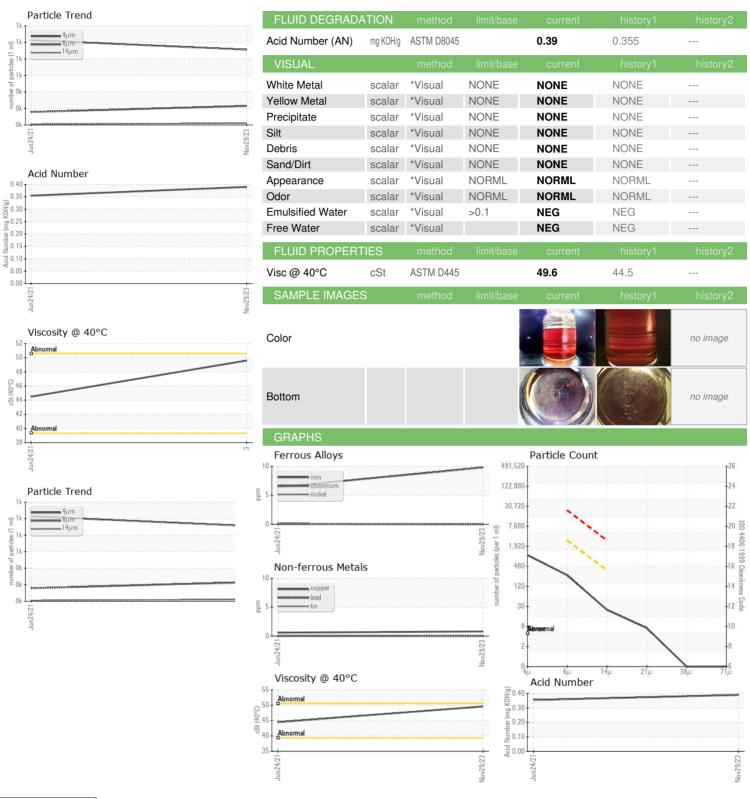





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 07 Dec 2023 : PTK0004819 Received : 09 Dec 2023 : 06028649 Diagnosed : Wes Davis : 10778440

Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NIAGARA PLAINFIELD 1250 WHITAKER RD PLAINFIELD, IN

US 46168 Contact: WILLI STIEFMAIER

rrogers@niagarawater.com T: (317)691-6420

F: x: