


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



KAESER ASD 30 5905216 (S/N 1338)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Mar201	8 Sep2018	Nov2019 De	c2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA008756	KC66578	KC79200
Sample Date		Client Info		01 Dec 2023	21 Nov 2019	27 Sep 2018
Machine Age	hrs	Client Info		17185	5846	3533
Oil Age	hrs	Client Info		0	3000	496
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	1	4
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	6	17	4
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	<1	2	58
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		<1	5	<1
Zinc	ppm	ASTM D5185m		0	94	45
Sulfur	ppm	ASTM D5185m		11269	15920	24401
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	0	10
Potassium	ppm	ASTM D5185m	>20	<1	<1	11
Water	%	ASTM D6304	>0.05	0.005	0.006	0.022
ppm Water	ppm	ASTM D6304	>500	52	60.3	220
FLUID CLEANLINI	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		2515	7432	25502
Particles >6μm		ASTM D7647		982	<u>^</u> 2602	<u></u> 6780
Particles >14μm		ASTM D7647	>80	30	△ 303	<u></u> 638
Particles >21μm		ASTM D7647	>20	4	<u>119</u>	△ 196
Particles >38μm		ASTM D7647	>4	0	<u>^</u> 23	▲ 12
Particles >71μm		ASTM D7647	>3	0	<u></u> 8	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/12	1 9/15	△ 20/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.434



OIL ANALYSIS REPORT

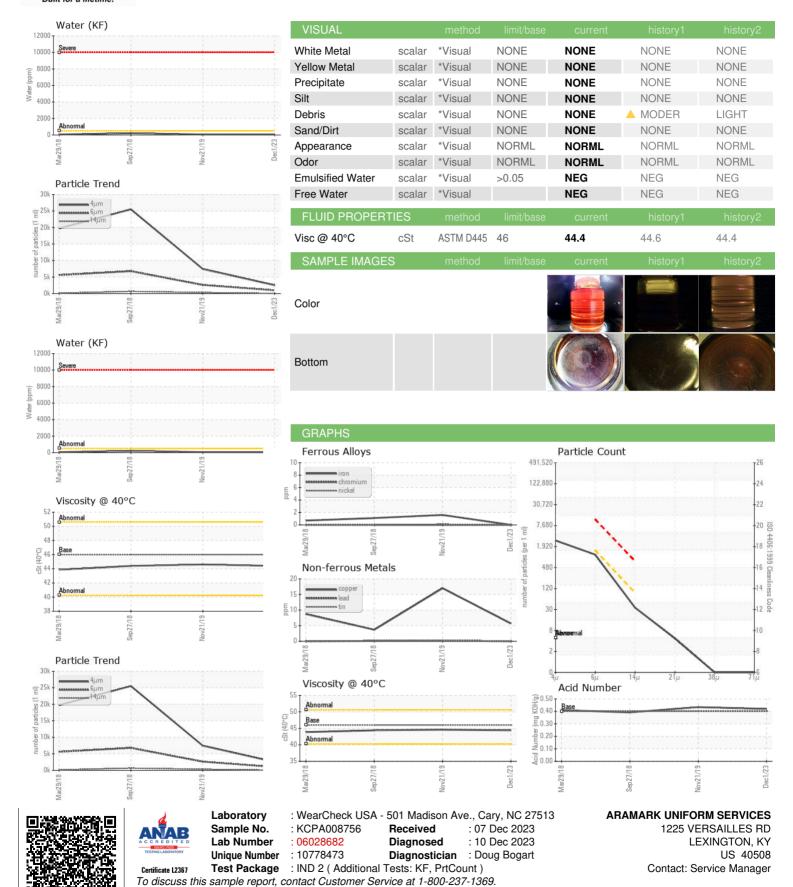

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: