



PROBLEM SUMMARY



Machine Id 1152159 (S/N NOT GIVEN) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

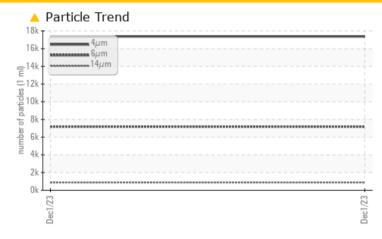

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBELLIN (THO TE			
Sample Status		ABNORMAL	
Particles >6µm	ASTM D7647 >	>1300 🔺 7191	
Particles >14µm	ASTM D7647 >	>80 🔺 881	
Particles >21µm	ASTM D7647 >	>20 🔺 251	
Particles >38µm	ASTM D7647 >	>4 🔺 11	
Oil Cleanliness	ISO 4406 (c) >	>/17/13 🔺 21/20/17	

Customer Id: PROVIC Sample No.: KCPA011411 Lab Number: 06028685 Test Package: IND 2



To manage this report scan the QR code


To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

Machine Id 1152159 (S/N NOT GIVEN) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample Number Sample Date Machine Age Oil Age		Client Info Client Info		KCPA011411	history1	history2
Sample Date Machine Age						
Machine Age				01 Dec 2023		
U	hrs	Client Info		182190		
	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status				ABNORMAL		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	8		
Tin	ppm		>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	<1		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	<1		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	17531		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.002		
ppm Water	ppm	ASTM D6304	>500	20		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		17374		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	1 1		
Particles >71µm		ASTM D7647	>3	1		
		ISO 4406 (c)	>/17/13	A 21/20/17		
Oil Cleanliness		100 4400 (0)	/11/10			
	TION	method	limit/base	current	history1	history2



Built for a lifetime



method

limit/base

current


history1

history2


VISUAL





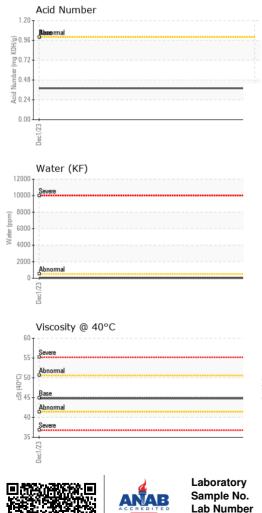

Certificate L2367

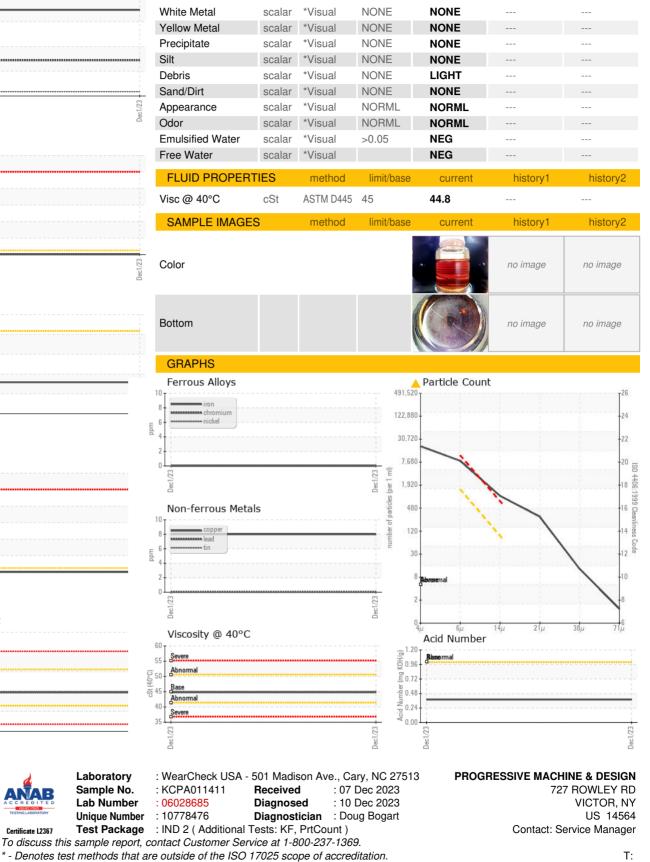

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - PROVIC

F: