


OIL ANALYSIS REPORT





NORMAL

KAESER SFC 40S 5510896 (S/N 1025)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFOR	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA009978	KC74413	KC74018	
Sample Date		Client Info		08 Nov 2023	16 Jun 2020	07 Jan 2020	
Machine Age	hrs	Client Info		50040	25866	22834	
Oil Age	hrs	Client Info		0	3000	6000	
Oil Changed		Client Info		N/A	Not Changd	Changed	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	<1	0	
Chromium	ppm	ASTM D5185m		0	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	<1	
Aluminum	ppm	ASTM D5185m		0	<1	0	
Lead	ppm	ASTM D5185m	>10	0	0	0	
		ASTM D5185m		8	7	6	
Copper Tin	ppm		>50 >10	0	<1	0	
Antimony	ppm	ASTM D5185m	210		0	0	
Antimony Vanadium	ppm	ASTM D5185m		0	0	0	
	ppm			0			
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	2	0	
Barium	ppm	ASTM D5185m	90	0	0	0	
Volybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m	90	1	2	0	
Calcium	ppm	ASTM D5185m	2	0	<1	0	
Phosphorus	ppm	ASTM D5185m		<1	0	1	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m		14506	14709	19749	
CONTAMINANTS	S	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<1	1	1	
Sodium	ppm	ASTM D5185m		2	<1	0	
Potassium	ppm	ASTM D5185m	>20	<1	0	1	
Water	%	ASTM D6304	>0.05	0.004	0.007	0.003	
ppm Water	ppm	ASTM D6304	>500	40	74.0	37.3	
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		1095	2321	211	
Particles >6µm		ASTM D7647		232	430	77	
Particles >14µm		ASTM D7647	>80	25	18	9	
Particles >21µm		ASTM D7647	>20	9	5	2	
Particles >38µm		ASTM D7647	>4	1	0	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>17/13	15/12	16/11	13/10	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.36	0.379	0.373	
:49:01) Rev: 1	5 3			Contact/Location: ? ? - ROC999ROC			


Report Id: ROC999ROC [WUSCAR] 06028693 (Generated: 12/10/2023 18:49:01) Rev: 1


Contact/Location: ? ? - ROC999ROC



OIL ANALYSIS REPORT






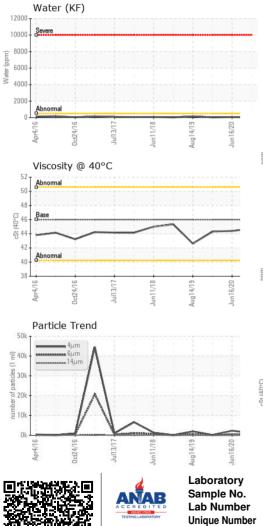

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	44.4	44.3
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						
Bottom						



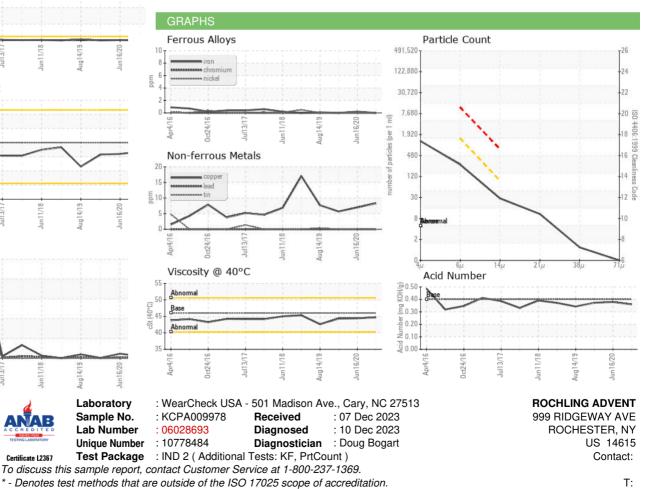

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Page 2 of 2

F: