




# OIL ANALYSIS REPORT

Sample Rating Trend

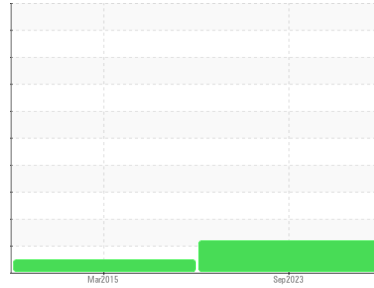

ISO



Machine Id  
**KUBOTA M125X TRACTOR M125X**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (9 QTS)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0793357</b>	WCM2261917	---
Sample Date	Client Info		<b>19 Sep 2023</b>	16 Mar 2015	---
Machine Age	hrs	Client Info	<b>1914</b>	1021	---
Oil Age	hrs	Client Info	<b>100</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>ATTENTION</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>3</b>	76	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	6	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	17	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	9	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>82</b>	45	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>67</b>	81	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>739</b>	116	---
Calcium	ppm	ASTM D5185m		<b>1043</b>	3598	---
Phosphorus	ppm	ASTM D5185m	1360	<b>826</b>	1068	---
Zinc	ppm	ASTM D5185m	1480	<b>1008</b>	1433	---
Sulfur	ppm	ASTM D5185m		<b>2562</b>	5434	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	7	---
Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	---


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.9</b>	9.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	22.	---




# OIL ANALYSIS REPORT


▲ Particle Trend

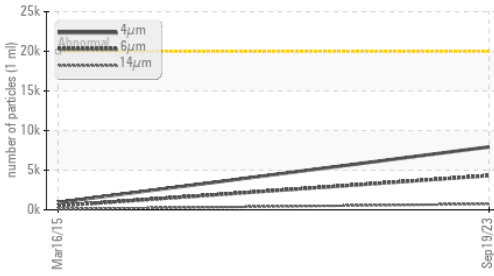


▲ Particle Trend

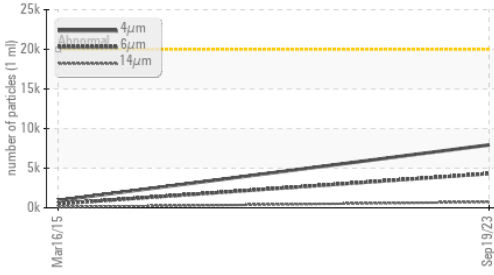

Base Number

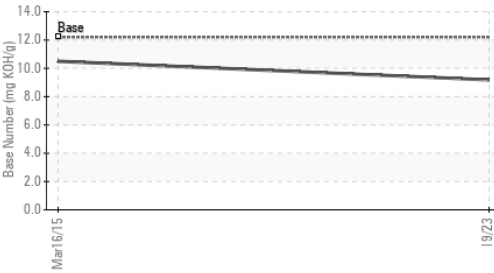

Viscosity @ 100°C

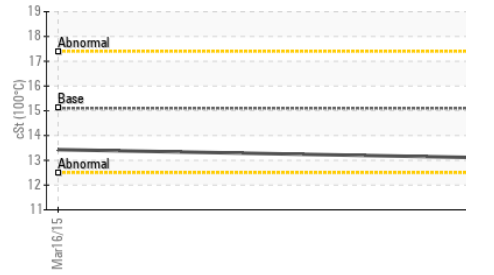

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>7934</b>	935	---
Particles >6µm	ASTM D7647	>5000	<b>4322</b>	509	---
Particles >14µm	ASTM D7647	>640	<b>▲ 736</b>	86	---
Particles >21µm	ASTM D7647	>160	<b>▲ 248</b>	29	---
Particles >38µm	ASTM D7647	>40	<b>38</b>	4	---
Particles >71µm	ASTM D7647	>10	<b>4</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>▲ 20/19/17</b>	17/16/14	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>13.7</b>	15.	---
Base Number (BN)	mg KOH/g ASTM D2896	12.2	<b>9.18</b>	10.5	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar *Visual		<b>NEG</b>	NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.1	<b>13.1</b>	13.43	---

## GRAPHS

Ferrous Alloys

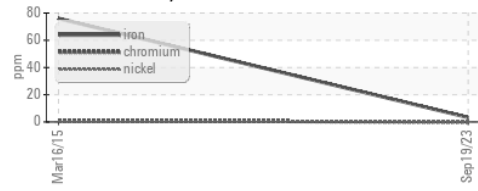


Non-ferrous Metals

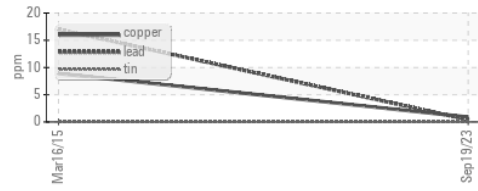

Viscosity @ 100°C



▲ Particle Count

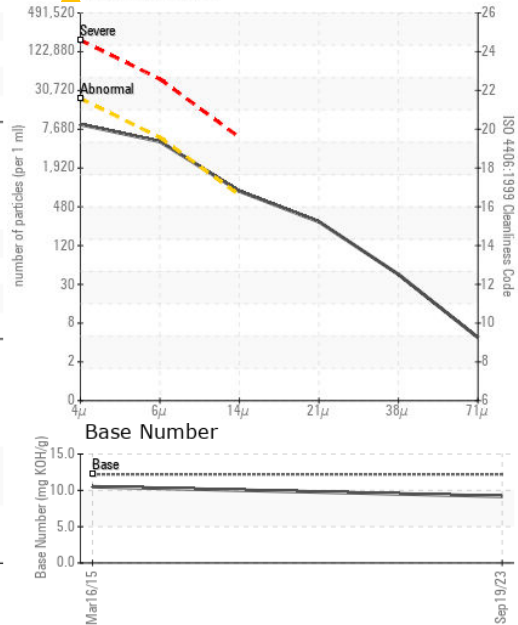

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0793357 Received : 07 Dec 2023  
 Lab Number : 06028801 Diagnosed : 12 Dec 2023  
 Unique Number : 10778592 Diagnostician : Wes Davis  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**GENES MACHINE**  
 235 LEEPER LN  
 VICTORIA, TX  
 US 77904

Contact: MATT APODACKIS  
 MATTAPODACKIS@GENESMACHINE.COM

T: (361)573-7146

F: