

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

PETERBILT VS 9744 Component

Diesel Engine SHELL ROTELLA T 15W40 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


		L-12010	L-2020 N-2020	May2022 Jan2023 Aug2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857793	WC0793358	WC0793353
Sample Date		Client Info		29 Nov 2023	03 Oct 2023	02 Aug 2023
Machine Age	hrs	Client Info		7340	7082	6606
Oil Age	hrs	Client Info		734	480	2736
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
CONTAMINATION	١	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	25	20	13
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	3	2
Lead	ppm	ASTM D5185m	>45	4	4	2
Copper	ppm	ASTM D5185m	>85	2	2	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	316	<1	1	3
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	59	58	60
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	24	925	912	940
Calcium	ppm	ASTM D5185m	2292	1124	1115	1161
Phosphorus	ppm	ASTM D5185m	1064	1021	1017	1081
Zinc	ppm	ASTM D5185m	1160	1245	1239	1304
Sulfur	ppm	ASTM D5185m	4996	3307	3394	4467
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	6	6	5
Sodium	ppm	ASTM D5185m		7	6	4
Potassium	ppm	ASTM D5185m	>20	7	6	6
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	12.5	12.7	10.2




OIL ANALYSIS REPORT

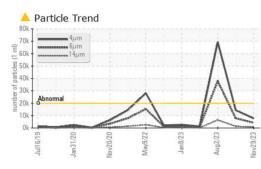

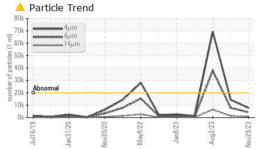

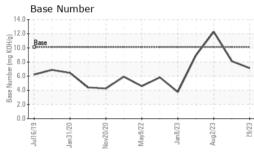



FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	7647	14380	▲ 69397
Particles >6µm		ASTM D7647	>5000	4166	▲ 7834	A 37805
Particles >14µm		ASTM D7647	>640	 709	🔺 1333	6434
Particles >21µm		ASTM D7647	>160	<mark>人</mark> 239	4 49	<u> </u>
Particles >38µm		ASTM D7647	>40	37	6 9	A 335
Particles >71µm		ASTM D7647	>10	4	7	A 34
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 20/19/17	1/20/18	▲ 23/22/20
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.5	22.5	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.13	8.12	12.27
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal						
renow wetai	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar scalar	*Visual *Visual	NONE NONE	NONE NONE	NONE NONE	NONE NONE
			_			
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate Silt	scalar scalar	*Visual *Visual	NONE	NONE	NONE	NONE
Precipitate Silt Debris	scalar scalar scalar	*Visual *Visual *Visual	NONE NONE NONE	NONE NONE NONE	NONE NONE NONE	NONE NONE NONE
Precipitate Silt Debris Sand/Dirt	scalar scalar scalar scalar	*Visual *Visual *Visual *Visual	NONE NONE NONE	NONE NONE NONE NONE	NONE NONE NONE NONE	NONE NONE NONE NONE
Precipitate Silt Debris Sand/Dirt Appearance	scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML	NONE NONE NONE NONE NORML	NONE NONE NONE NONE NORML	NONE NONE NONE NONE NORML
Precipitate Silt Debris Sand/Dirt Appearance Odor	scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML NORML	NONE NONE NONE NORE NORML NORML	NONE NONE NONE NORML NORML	NONE NONE NONE NORML NORML
Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water	scalar scalar scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML NORML	NONE NONE NONE NORML NORML NEG	NONE NONE NONE NORML NORML NEG	NONE NONE NONE NORML NORML NEG



100

60

40

20


10

cSt (100°C)

Laboratory


Sample No.

mdd 50

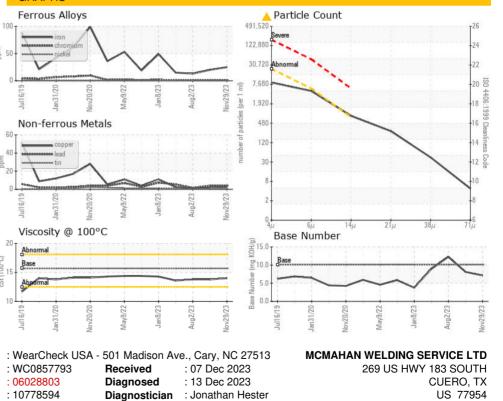



Test Package : MOB 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)



Submitted By: Chip Stelpflug

Page 2 of 2