




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

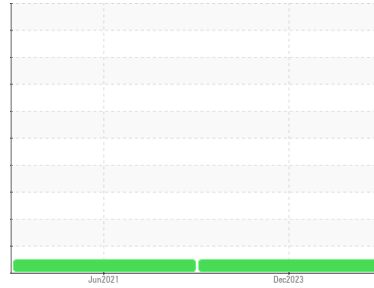

Machine Id
7684906

Component
Hydraulic System

Fluid
FIRE-RESISTANT FLUID ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition. Insufficient sample was received to conduct all the routine laboratory tests. Leaked in transit.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

{not applicable}

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PTK06028993	PTK0002427	---
Sample Date	Client Info			07 Dec 2023	24 Jun 2021	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	---
Chromium	ppm	ASTM D5185m	>10	1	0	---
Nickel	ppm	ASTM D5185m	>10	2	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	2	0	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Antimony	ppm	ASTM D5185m		---	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	---
Barium	ppm	ASTM D5185m	5	0	0	---
Molybdenum	ppm	ASTM D5185m	5	0	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	5	0	<1	---
Calcium	ppm	ASTM D5185m	50	7	0	---
Phosphorus	ppm	ASTM D5185m	175	120	225	---
Zinc	ppm	ASTM D5185m	62	24	124	---
Sulfur	ppm	ASTM D5185m	500	344	299	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	1	0	---
Sodium	ppm	ASTM D5185m		2	0	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water	%	ASTM D6304	>55	NEG	NEG	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		---	421	---
Particles >6µm		ASTM D7647	>2500	---	69	---
Particles >14µm		ASTM D7647	>320	---	3	---
Particles >21µm		ASTM D7647	>80	---	0	---
Particles >38µm		ASTM D7647	>20	---	0	---
Particles >71µm		ASTM D7647	>4	---	0	---
Oil Cleanliness		ISO 4406 (c)	>18/15	---	16/13/9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	3.63	---	0.370	---



OIL ANALYSIS REPORT

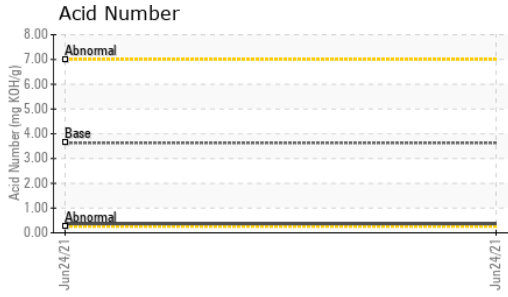





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>55	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	---	45.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

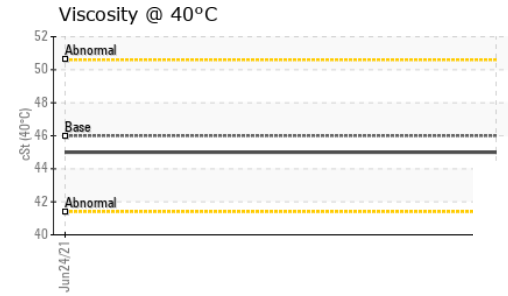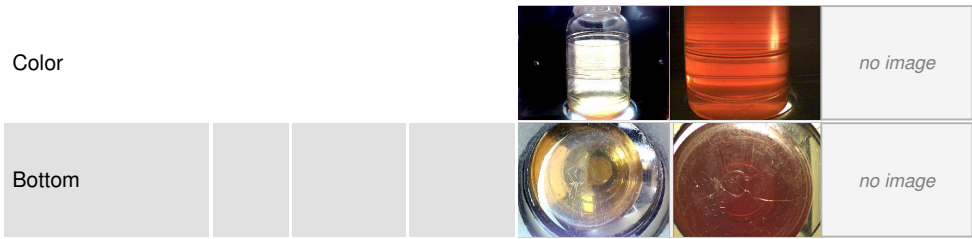

GRAPHS

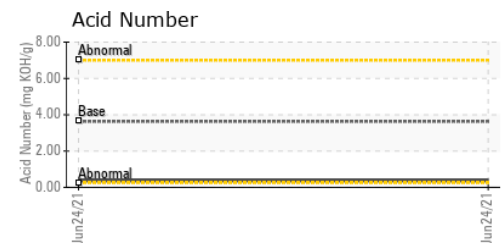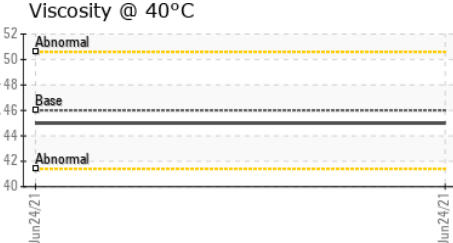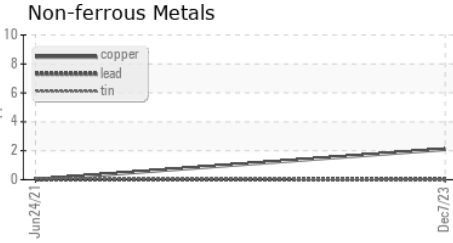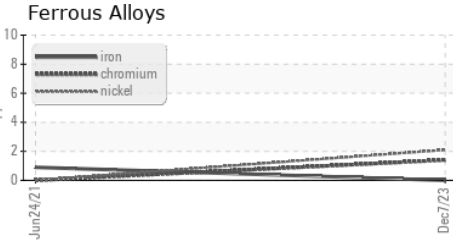

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK06028993 **Recieved** : 07 Dec 2023
Lab Number : 06028993 **Diagnosed** : 18 Dec 2023
Unique Number : 10778784 **Diagnostician** : Doug Bogart
Test Package : MOB 1 (Additional Tests: KF, PrtCount)

NIAGARA PLAINFIELD
 1250 WHITAKER RD
 PLAINFIELD, IN
 US 46168
 Contact: JON AMROZOWICZ
 jamrozowicz@niagarawater.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)