




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

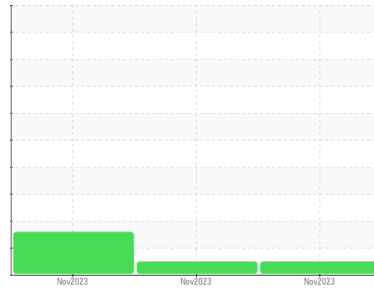

Area
EL SAUZ [200007686]
 Machine Id
M04WEA90360 (S/N GME004427A-52)
 Component
Hydraulic System
 Fluid
SHELL TELLUS S2 VX 32 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX014598	NX014657	NX014585
Sample Date	Client Info		08 Nov 2023	07 Nov 2023	02 Nov 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	---	MARGINAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		2	14	15
Iron	ppm	ASTM D5185m >20	<1	<1	0
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >20	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	2	0
Lead	ppm	ASTM D5185m >20	<1	0	<1
Copper	ppm	ASTM D5185m >20	4	1	4
Tin	ppm	ASTM D5185m >20	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	19	22	19
Calcium	ppm	ASTM D5185m	29	29	28
Phosphorus	ppm	ASTM D5185m	303	323	267
Zinc	ppm	ASTM D5185m	274	283	239
Sulfur	ppm	ASTM D5185m	7730	6984	6267

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	6	▲ 48	▲ 19
Sodium	ppm	ASTM D5185m	0	0	<1
Potassium	ppm	ASTM D5185m >20	<1	<1	0
Water	%	ASTM D6304 >0.05	0.002	0.026	0.003
ppm Water	ppm	ASTM D6304 >500	23	260	30

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	1003	---	491
Particles >6µm	ASTM D7647	>2500	348	---	109
Particles >14µm	ASTM D7647	>320	37	---	16
Particles >21µm	ASTM D7647	>80	12	---	3
Particles >38µm	ASTM D7647	>20	1	---	0
Particles >71µm	ASTM D7647	>4	0	---	0
Oil Cleanliness	ISO 4406 (c)	>21/18/15	17/16/12	---	16/14/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.41	0.41	0.40




OIL ANALYSIS REPORT

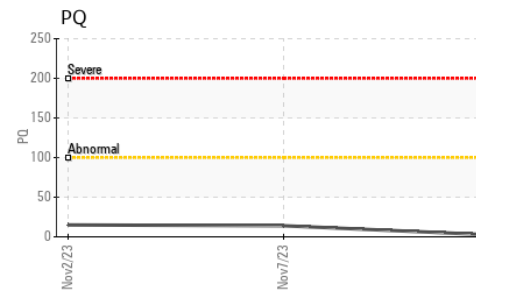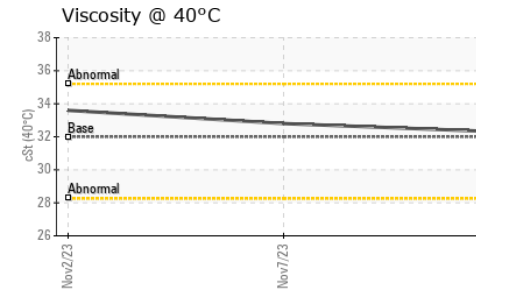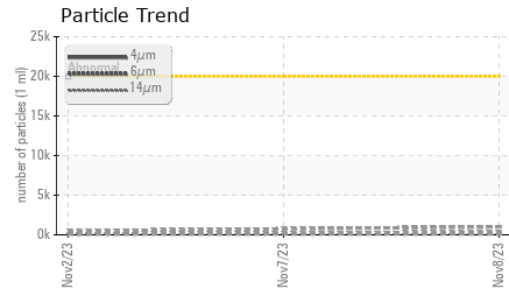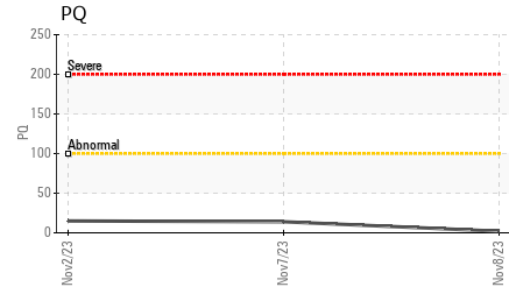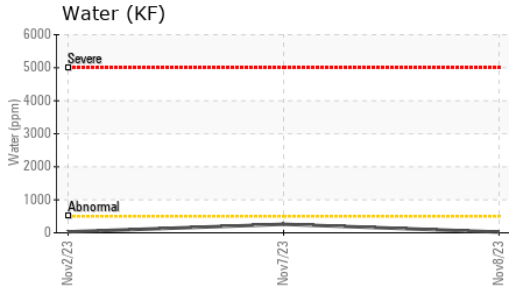



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 32	32.3	32.8	33.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

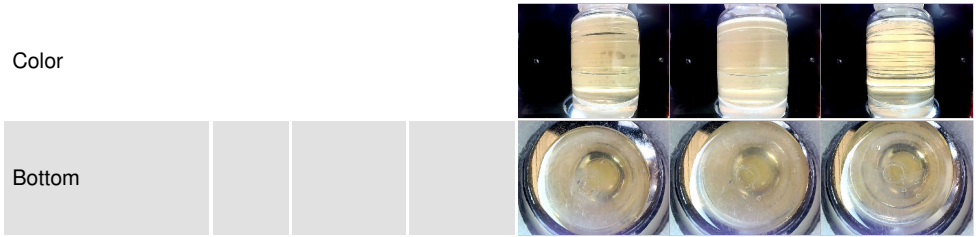

GRAPHS



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX014598 **Received** : 08 Dec 2023
Lab Number : 06029374 **Diagnosed** : 12 Dec 2023
Unique Number : 10779165 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PQ)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606
 Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com
 T: (312)386-4124
 F: (312)386-7102

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)