

PROBLEM SUMMARY

Sample Rating Trend




KAESER AIRTOWER 8 2289945 (S/N 1002)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

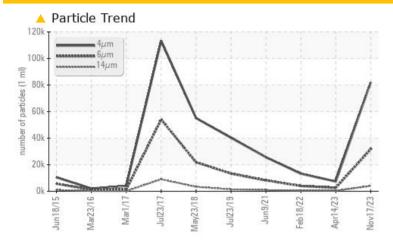

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		ABNORMA	L ABNORMAL	ABNORMAL					
Particles >6µm	ASTM D7647 >130	00 🔺 31631	<u>^</u> 2621	△ 3986					
Particles >14µm	ASTM D7647 >80	4026	△ 329	<u> </u>					
Particles >21µm	ASTM D7647 >20	<u> </u>	A 89	▲ 87					
Particles >38µm	ASTM D7647 >4	4 37	<u> </u>	6					
Oil Cleanliness	ISO 4406 (c) >17/	13 A 22/19	<u></u> 19/16	<u></u> 19/16					

Customer Id: JPADUL Sample No.: KCPA009984 Lab Number: 06029391 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

14 Apr 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



18 Feb 2022 Diag: Angela Borella

150



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



09 Jun 2021 Diag: Angela Borella

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




Report Id: JPADUL [WUSCAR] 06029391 (Generated: 12/13/2023 00:18:17) Rev: 1

Contact/Location: DAN ? - JPADUL



OIL ANALYSIS REPORT

Sample Rating Trend

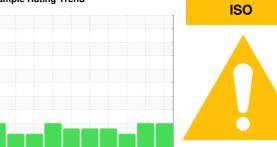

Machine Id

KAESER AIRTOWER 8 2289945 (S/N 1002)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jun2015 Mar2	016 Mar2017 Jul2017 May2	018 Jul2019 Jun2021 Feb2022 Apr20	023 Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009984	KCPA001322	KCP43385
Sample Date		Client Info		17 Nov 2023	14 Apr 2023	18 Feb 2022
Machine Age	hrs	Client Info		72577	72024	68951
Oil Age	hrs	Client Info		0	0	1700
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	0	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	1	3	1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	33
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	70	40	74
Calcium	ppm	ASTM D5185m	2	0	0	1
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	3	0
Sulfur	ppm	ASTM D5185m		20419	18661	14439
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	<1
Sodium	ppm	ASTM D5185m		10	5	20
Potassium	ppm	ASTM D5185m	>20	2	2	4
Water	%	ASTM D6304	>0.05	0.033	0.016	0.023
ppm Water	ppm	ASTM D6304	>500	339	163.5	237.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		82066	7394	13214
Particles >6µm		ASTM D7647	>1300	△ 31631	<u>^</u> 2621	△ 3986
Particles >14µm		ASTM D7647	>80	4026	▲ 329	444
Particles >21µm		ASTM D7647	>20	<u> </u>	<u>\$9</u>	▲ 87
Particles >38µm		ASTM D7647	>4	<u>▲</u> 37	<u> </u>	6
Particles >71µm		ASTM D7647	>3	1	1	0
Oil Cleanliness		ISO 4406 (c)	>17/13	<u>22/19</u>	<u>19/16</u>	<u>19/16</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.38

Contact/Location: DAN ? - JPADUL



OIL ANALYSIS REPORT

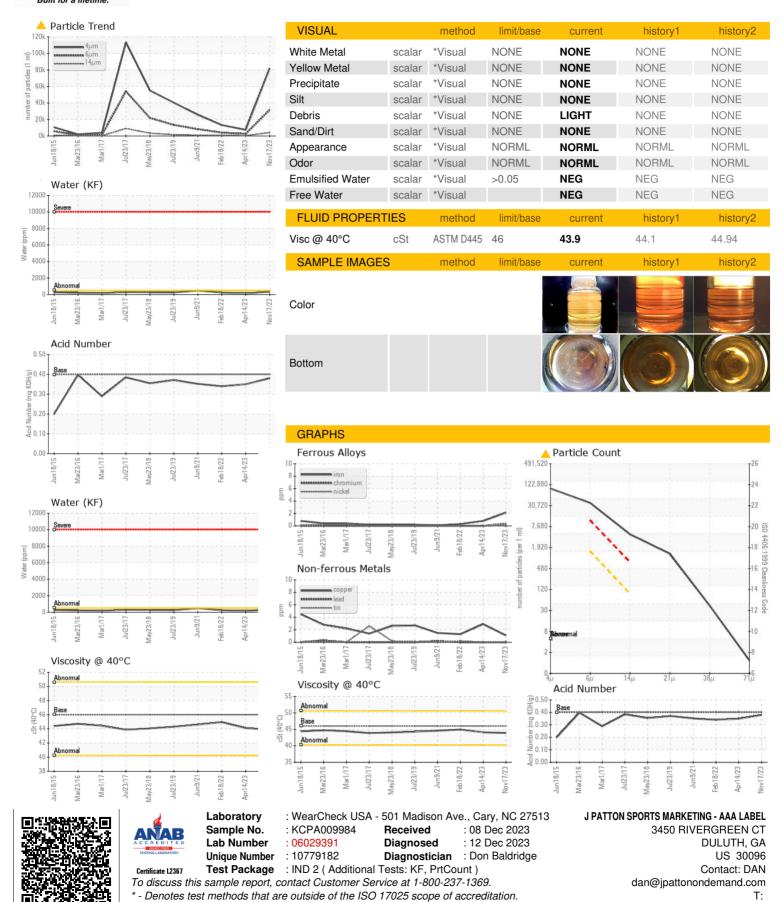

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: