

PROBLEM SUMMARY

Sample Rating Trend


ISO

Machine Id KAESER AS 25 4257651 (S/N 1823)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

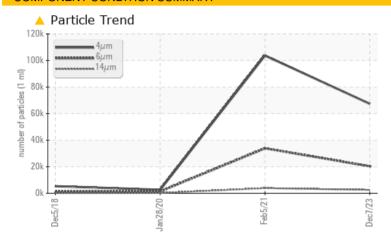

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	20308	▲ 33871	1431				
Particles >14μm	ASTM D7647	>80	2520	▲ 3838	<u>243</u>				
Particles >21μm	ASTM D7647	>20	^ 740	<u>1104</u>	▲ 82				
Particles >38μm	ASTM D7647	>4	23	4 7	<u>12</u>				
Oil Cleanliness	ISO 4406 (c)	>/17/13	23/22/19	<u>^</u> 22/19	△ 18/15				

Customer Id: MATNOR Sample No.: KCPA009378 Lab Number: 06029401 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Feb 2021 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



28 Jan 2020 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



05 Dec 2018 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

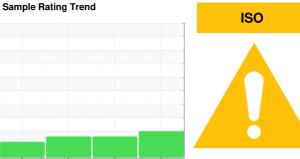

KAESER AS 25 4257651 (S/N 1823)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Dec201	8 Jan2020	Feb 2021 De	c2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009378	KCP28981	KCP20408
Sample Date		Client Info		07 Dec 2023	05 Feb 2021	28 Jan 2020
Machine Age	hrs	Client Info		15076	10507	9570
Oil Age	hrs	Client Info		0	937	787
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	1	<1
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	39	5	9
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	0
Barium	ppm	ASTM D5185m	90	0	7	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	2	52	40
Calcium	ppm	ASTM D5185m	0	0	<1	0
Phosphorus	ppm	ASTM D5185m	0	0	9	<1
Zinc	ppm	ASTM D5185m	0	0	11	36
Sulfur	ppm	ASTM D5185m	23500	17023	17934	18240
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	<1	1
Sodium	ppm	ASTM D5185m		<1	18	13
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Water	%	ASTM D6304		0.019	0.021	0.018
ppm Water	ppm	ASTM D6304	>500	194	210.1	181.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		67378	103709	2628
Particles >6µm		ASTM D7647	>1300	<u>^</u> 20308	<u>▲</u> 33871	<u>▲</u> 1431
Particles >14μm		ASTM D7647	>80	<u>^</u> 2520	▲ 3838	<u>^</u> 243
Particles >21µm		ASTM D7647	>20	<u>^</u> 740	<u>1104</u>	▲ 82
Particles >38µm		ASTM D7647	>4	<u>^</u> 23	▲ 47	<u> </u>
Particles >71µm		ASTM D7647	>3	2	2	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>23/22/19</u>	<u>22/19</u>	▲ 18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	4 OT1 4 D 00 4 F				



OIL ANALYSIS REPORT

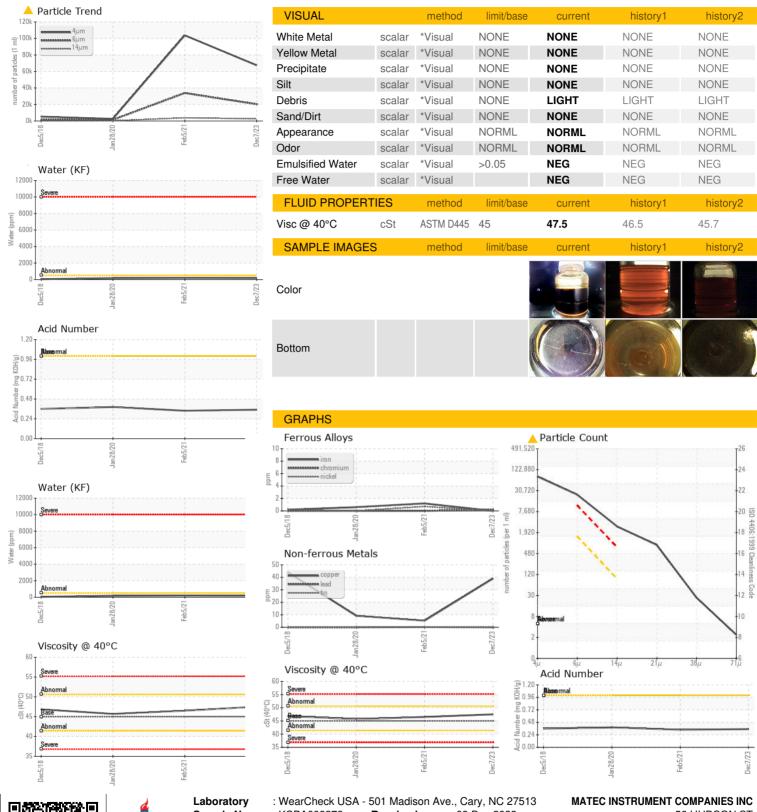





Certificate L2367

Sample No. Lab Number **Unique Number**

: 06029401

: KCPA009378 : 10779192

Received : 08 Dec 2023 Diagnosed : 11 Dec 2023

Diagnostician : Doug Bogart

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

56 HUDSON ST NORTHBOROUGH, MA US 01532

Contact: Service Manager

T:

F: