




# OIL ANALYSIS REPORT

Sample Rating Trend

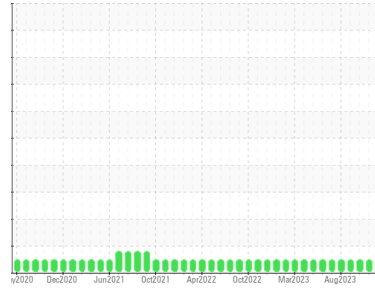

**NORMAL**



Area

**Tampa**

Machine Id

**[Tampa] Oil - Starboard Main Engine**

Component

**Starboard Main Engine**

Fluid

**MOBIL 15W40 (35 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>WC0845990</b>	WC0805337	WC0769434	
Sample Date	Client Info	<b>21 Nov 2023</b>	25 Oct 2023	27 Sep 2023	
Machine Age	hrs	Client Info	<b>20061</b>	19532	18864
Oil Age	hrs	Client Info	<b>2173</b>	1661	1017
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>7</b>	7	3
Chromium	ppm ASTM D5185m >8	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >3	<b>1</b>	1	1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>4</b>	4	1
Lead	ppm ASTM D5185m >18	<b>1</b>	<1	<1
Copper	ppm ASTM D5185m >80	<b>13</b>	13	9
Tin	ppm ASTM D5185m >14	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>72</b>	69	85
Barium	ppm ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m	<b>81</b>	83	75
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m	<b>614</b>	625	626
Calcium	ppm ASTM D5185m	<b>1521</b>	1517	1500
Phosphorus	ppm ASTM D5185m	<b>849</b>	772	738
Zinc	ppm ASTM D5185m	<b>918</b>	940	903
Sulfur	ppm ASTM D5185m	<b>2757</b>	3453	2890

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>5</b>	4	4
Sodium	ppm ASTM D5185m >118	<b>0</b>	5	1
Potassium	ppm ASTM D5185m >20	<b>2</b>	2	<1
Water	% ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>9.2</b>	8.9	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.0</b>	21.0	19.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.5</b>	19.1	17.0
Base Number (BN)	mg KOH/g ASTM D2896	<b>9.09</b>	12.88	9.92







# OIL ANALYSIS REPORT

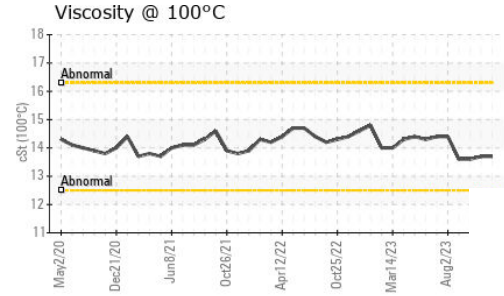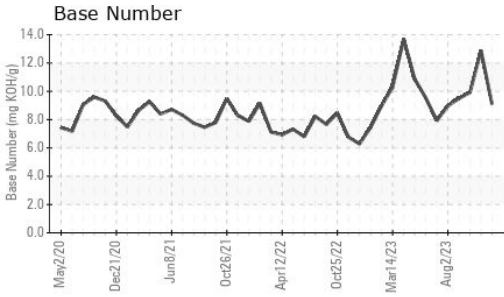

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.7	13.7	13.6

## GRAPHS

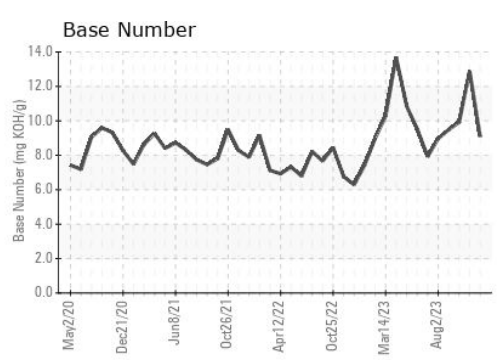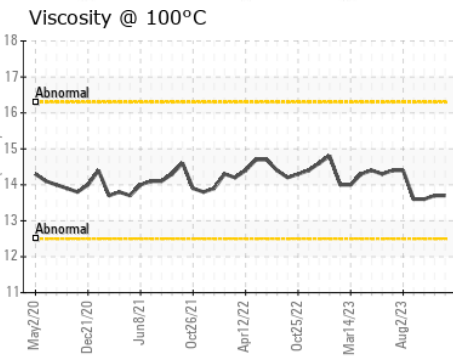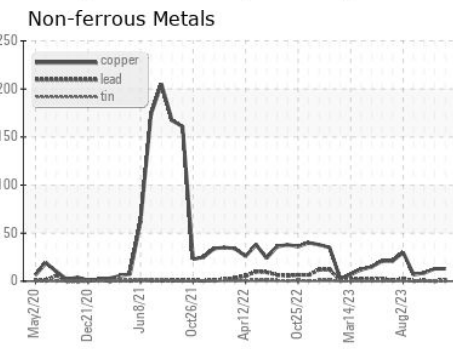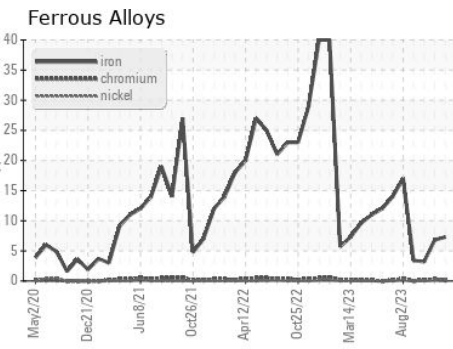

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0845990 **Received** : 08 Dec 2023  
**Lab Number** : 06029570 **Diagnosed** : 13 Dec 2023  
**Unique Number** : 10779361 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)