



# PROBLEM SUMMARY

Sample Rating Trend



VISCOSITY



Machine Id  
**CAUFFIEL ROLLING MILL**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL MOBILGEAR 600 XP 320 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend



### ▲ Viscosity @ 40°C



## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL --- ---				
Particles >4µm	ASTM D7647	>20000	▲ 80485	---	---
Particles >6µm	ASTM D7647	>5000	▲ 26955	---	---
Particles >14µm	ASTM D7647	>640	▲ 2505	---	---
Particles >21µm	ASTM D7647	>160	▲ 702	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/19	---	---
Visc @ 40°C	cSt	ASTM D445	320	▲ 207.9	---
PrtFilter					no image

Customer Id: LINORA  
 Sample No.: PH0003685  
 Lab Number: 06029993  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id  
**CAUFFIEL ROLLING MILL**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL MOBILGEAR 600 XP 320 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### ▲ Fluid Condition

Viscosity of sample indicates oil is within ISO 220 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PH0003685</b>	---	---
Sample Date	Client Info			<b>07 Dec 2023</b>	---	---
Machine Age	yrs	Client Info		<b>0</b>	---	---
Oil Age	yrs	Client Info		<b>1</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>100	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>31</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---	---
Calcium	ppm	ASTM D5185m		<b>13</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>263</b>	---	---
Zinc	ppm	ASTM D5185m		<b>31</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>7174</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---





FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>▲ 80485</b>	---	---
Particles >6µm		ASTM D7647	>5000	<b>▲ 26955</b>	---	---
Particles >14µm		ASTM D7647	>640	<b>▲ 2505</b>	---	---
Particles >21µm		ASTM D7647	>160	<b>▲ 702</b>	---	---
Particles >38µm		ASTM D7647	>40	<b>39</b>	---	---
Particles >71µm		ASTM D7647	>10	<b>5</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>▲ 24/22/19</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.54</b>	---	---

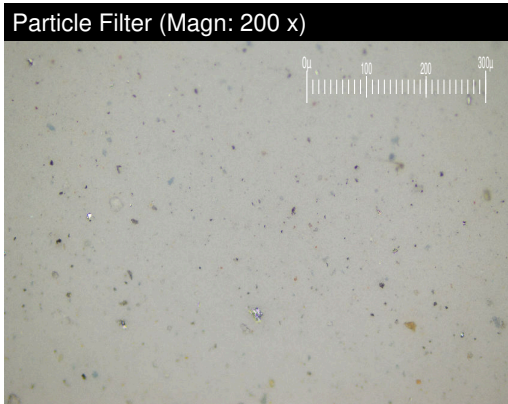



# OIL ANALYSIS REPORT

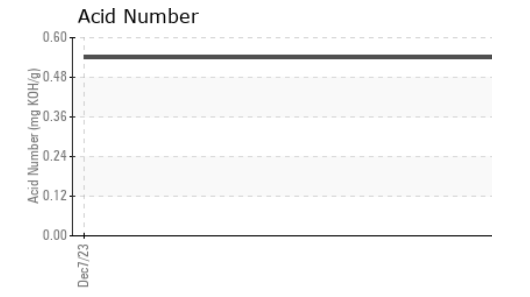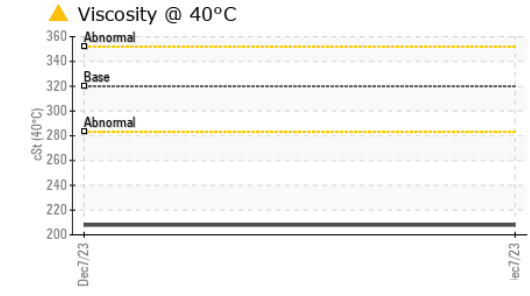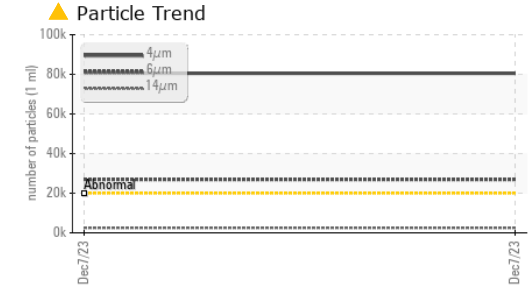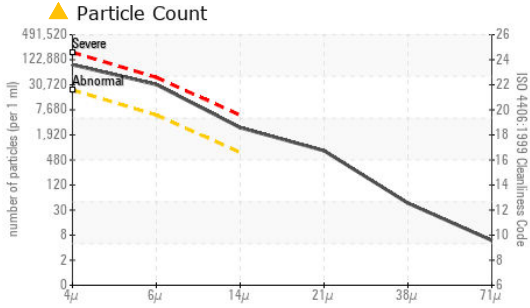

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0003685 **Received** : 08 Dec 2023  
**Lab Number** : 06029993 **Diagnosed** : 15 Dec 2023  
**Unique Number** : 10779784 **Diagnostician** : Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

**LINDE ADVANCED MATERIALS TECHNOLOGIES**  
 542 ROUTE 303  
 ORANGEBURG, NY  
 US 10920  
 Contact: THOMAS BIGGIE  
 thomas.biggie@linde.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	▲ 207.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

## GRAPHS

